

ASHUN

Hydraulic Valves

- Modular Valves
- Directional Control Valves
- Pressure Control Valves
- Flow Control Valves



Jan. 2017

油順精密股份有限公司
ASHUN FLUID POWER CO., LTD.

www.ashun.com

A WORLD-CLASS MANUFACTURER

of Hydraulic Valves

油順精密成立於1984年，以液壓動力系統設計為企業基礎，多年來致力研發、生產各式油壓、氣壓產品與客製化產品，產品包含：油壓缸、氣壓缸、油壓閥、蓄壓器、油壓動力系統等。

油順精密為客戶在流體傳動產業的第一選擇且透過高性能的解決方式創造價值，以誠信正直、專注創新與責任為宗旨，作為流體傳動產業中，長期且值得信賴的技術及產能提供者。

油順精密致力於培育人才進修，不斷研究開發新產品，更為提升品質穩定性與生產技術，陸續引進德日自動化設備，提升良好的生產管理與品質管制程序，產品品質更加完美。

油順精密產品成功外銷遍及全球，更獲得歐、美、日等工業大國品質認可。展望未來，油順精密將更積極研發新產品，期望邁向國際化，根留台灣，永續經營。

ASHUN was established in 1984. ASHUN is based on fluid power systems, makes efforts to research, develop and manufacture various hydraulic, pneumatic products and customized products. ASHUN products include hydraulic cylinders, pneumatic cylinders, hydraulic valves, accumulators, hydraulic power systems, etc.

ASHUN shall be the customers' first choice in the fluid power industry, creating value through high-performance solutions. The core values are integrity, customer focus, innovation and responsibility. Our mission is to be the trusted technology and capacity provider of the fluid power industry for years to come.

ASHUN exerts to train excellent talent, research and develop new products constantly, in order to promote the stability of quality and manufacturing technology, ASHUN has been replenishing automation equipment from Germany and Japan, improved the good manufacturing management and quality control procedures, the quality of products will be more perfect.

ASHUN products are exported worldwide successfully, and access to quality recognition from industrial countries, such as Europe, USA and Japan. Prospect of the future, ASHUN will be more positive to research and develop new products, look forward to moving toward internationalization, the root keeps Taiwan and permanent management.

INDEX

P01 新產品 - 01系列疊加閥 Modular Valves

NEW

- 03 疊加式溢流閥 Relief Modular Valves
- 05 疊加式減壓閥 Pressure Reducing Modular Valves
- 07 疊加式順序閥 Sequence Modular Valves
- 08 疊加式抗衡閥 Counterbalance Modular Valves
- 10 疊加式節流閥 Throttle Modular Valves
- 12 疊加式節流單向閥 Check and Throttle Modular Valves
- 14 疊加式單向節流閥 Throttle and Check Modular Valves
- 17 疊加式單向閥 Check Modular Valves
- 19 疊加式先導單向閥 Pilot Operated Check Modular Valves

P21 疊加閥 Modular Valves

- 21 疊加式溢流閥 Relief Modular Valves
- 24 疊加式減壓閥 Reducing Modular Valves
- 27 疊加式順序閥 Sequence Modular Valves
- 29 疊加式平衡閥 Counterbalance Modular Valves
- 32 疊加式單向閥 Check Modular Valves
- 34 疊加式液控單向閥 Pilot Operated Check Modular Valves
- 36 釋壓型疊加式液控單向閥 Decompressing Pilot Operated Check Modular Valves
- 38 疊加式節流閥 Throttle Modular Valves
- 40 疊加式單向節流閥 Throttle and Check Modular Valves

P42 方向控制閥 Directional Control Valves

- 42 電磁換向閥 Solenoid Operated Directional Valves
- 49 單向閥 Check Valves
- 51 預充閥(滿油閥) Prefill Valves (Surge Valves)
- 53 液控單向閥 Pilot Operated Check Valves
- 54 釋壓型液控單向閥 Decompressing Pilot Operated Check Valves
- 57 液控單向閥 Pilot Operated Check Valves
- 59 手動換向閥 Manually Operated Directional Valves
- 63 轉閥型換向閥 Rotary Type Directional Valves
- 65 液控換向閥 Pilot Operated Directional Valves

P68 壓力控制閥 Pressure Control Valves

- 68 溢流閥 Relief Valves
- 72 低噪聲型溢流閥 Low Noise Type Pilot Operated Relief Valves
- 74 低噪聲型電磁控制溢流閥 Low Noise Type Solenoid Controlled Relief Valves
- 76 電磁控制溢流閥 Solenoid Controlled Relief Valves
- 81 減壓閥 Pressure Reducing Valves
- 84 單向減壓閥 Pressure Reducing and Check Valves
- 87 壓力控制閥 Pressure Control Valves

P93 流量控制閥 Flow Control Valves

- 93 節流閥 Restrictors
- 95 單向節流閥 One Way Restrictors
- 97 液控節流閥 Pilot Operated Restrictors

P109 產品索引 Products Index

油順精密01新系列的液壓疊加閥，組裝緊湊，安裝容易，靈活易變，成本低，性能佳，耐用可靠。

本疊加閥系列包含有方向控制、壓力控制及流量調節控制等。


ASHUN 01 new series of modular valves offer economical assemblies, combining great flexibility and high performance in a compact valve package.

The modular valve series include directional control, pressure control and flow regulating control.

■ 特點 FEATURES

- 高壓力
- 大流量
- 系統設計靈活
- 組裝緊湊
- 洩漏、振動、噪音均小
- 保養容易
- High pressure : 31.5 MPa
- High flow : 40L/min
- System design flexibility
- Simply compact installation
- Scant risk of leakage, noise and vibration
- Easy maintenance

■ 疊加閥組裝實例 STACKING EXAMPLE

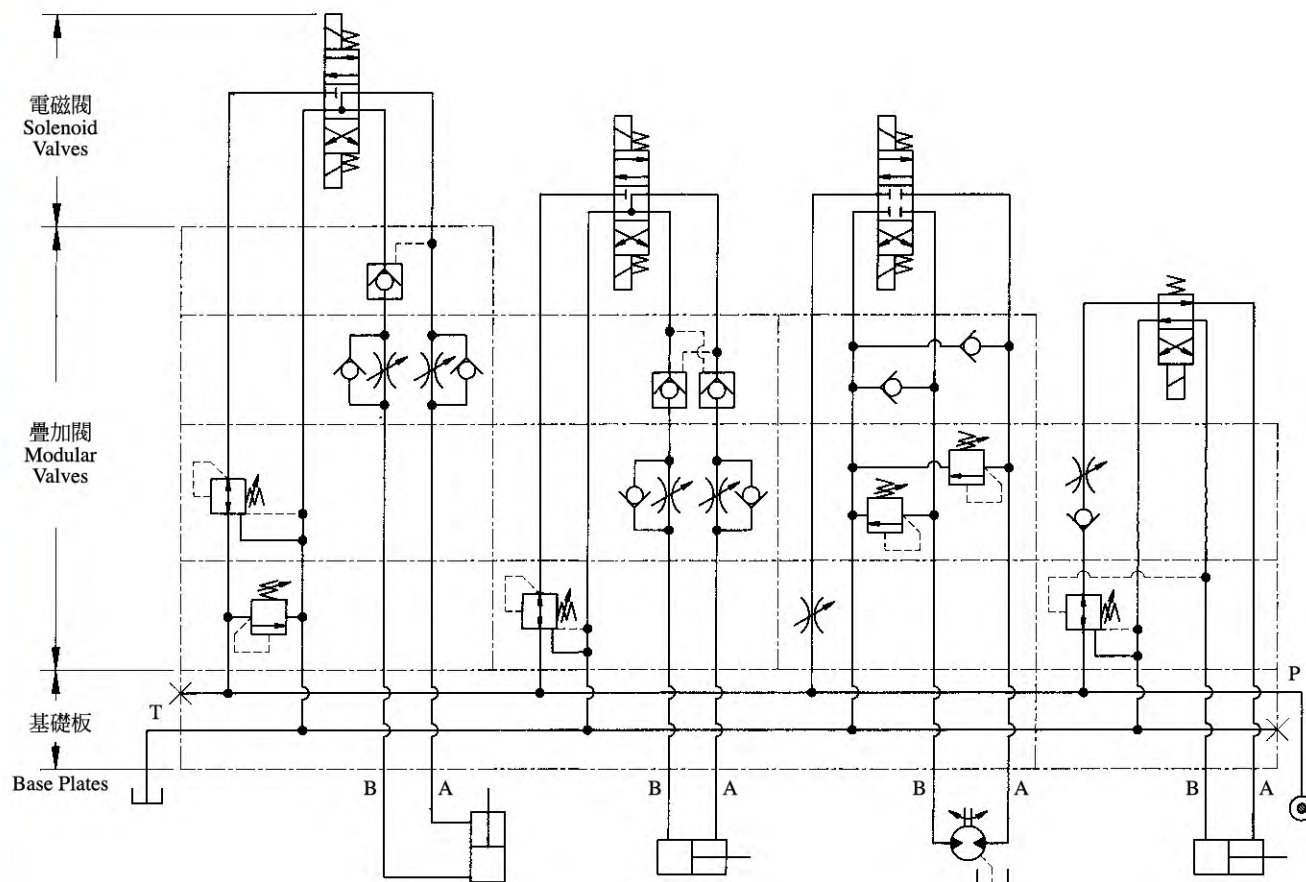


■ 安全注意範例 CARE IN APPLICATION

■ 鎖定迴路及減壓迴路

左迴路圖的安裝不能使油壓缸保持固定位置

When MRB-01-※ and MPW-01 are used together in the same circuit, the right circuit is correct, and the left is wrong, as MPW-01 would not be totally closed.

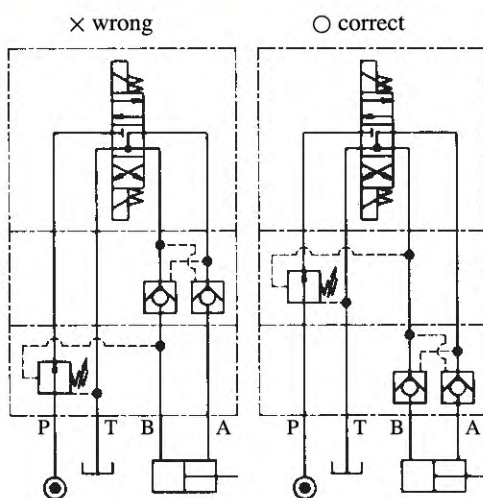

電磁閥
solenoid valve
(DSG-01)


疊加式減壓閥
pressure reducing modular valve
(MRB-01-※)

疊加式先導單向閥
pilot operated check modular valve
(MPW-01-※)

■ 鎖定迴路及速度控制

左迴路圖的安裝會使油壓缸產生震盪現象

When MSW-01-X and MPW-01-※ are used together in the same circuit, MSW-01-X should be installed closer to the cylinder ports, otherwise the cylinder may have a "vibrating" phenomenon happened.

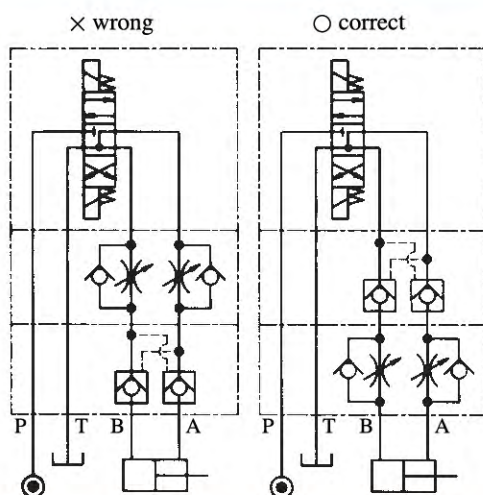

電磁閥
solenoid valve
(DSG-01)


疊加式先導單向閥
pilot operated check modular valve
(MPW-01-※)

疊加式單向節流閥
throttle and check modular valve
(MSW-01-X)

■ 速度控制及減壓迴路

左迴路圖的安裝會使油壓缸拉力不足及速度降低

When MRB-01 and MSW-01-X are used together in the same circuit, the right circuit is correct, and the left is wrong, as the function of MRB-01 will be affected when oil flow from B port to T port. Because MSW-01 will create a pressure which will cause MRB-01-※ to reduce the pressure too low, and the cylinder then can not operate with enough force or move smoothly.



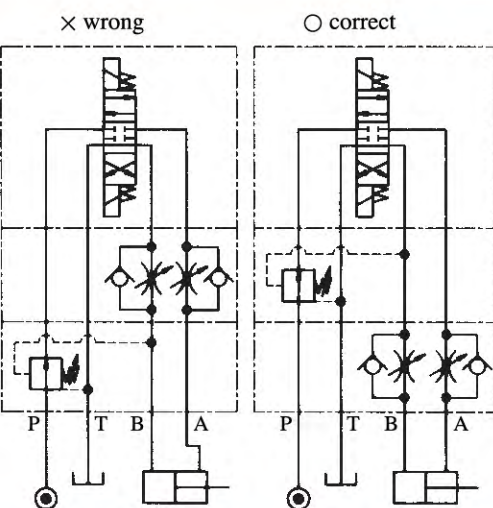


電磁閥
solenoid valve
(DSG-01)

疊加式先導單向閥
pilot operated check modular valve
(MPW-01-※)

疊加式單向節流閥
throttle and check modular valve
(MSW-01-X)

新產品 - 疊加式溢流閥 Relief Modular Valves



選購指南 HOW TO ORDER

MBP	01	C	30
系列編號 SERIES NUMBER	口徑 VALVE SIZE	壓力調整範圍 PRESSURE ADJ. RANGE MPa (kgf/cm ²)	設計號 DESIGN NUMBER
Relief Modular Valves MBP : For P - Line MBA : For A - Line MBB : For B - Line	- 01 : 1/4"	- C : ★ - 14 (140) - H : 7 (70) - 21 (210)	- 30




★ 請詳見最低調整壓力特性 See Min.Adjustment Pressure for the item marked.

規格說明 SPECIFICATIONS

型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
MBP-01-※-30	31.5 (315)	40	1.1
MBA-01-※-30			
MBB-01-※-30			

性能曲線 PERFORMANCE CURVES

Hydraulic Fluid : Viscosity 35 cSt (35 mm²/s) , Specific Gravity 0.850

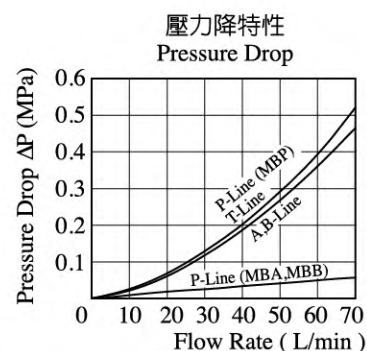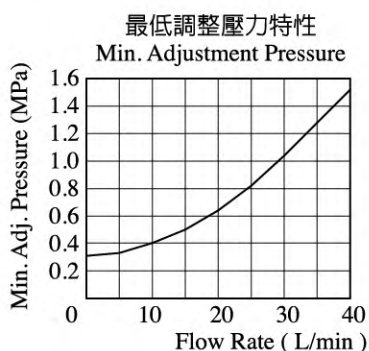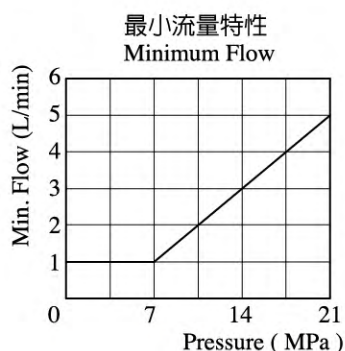


疊加式溢流閥 Relief Modular Valves


● MBP-01-※- MBA-01-※-

安裝尺寸符合ISO4401-AB-03-4-A
Mounting Surface:ISO4401-AB-03-4-A




DIMENSIONS IN MILLIMETRES

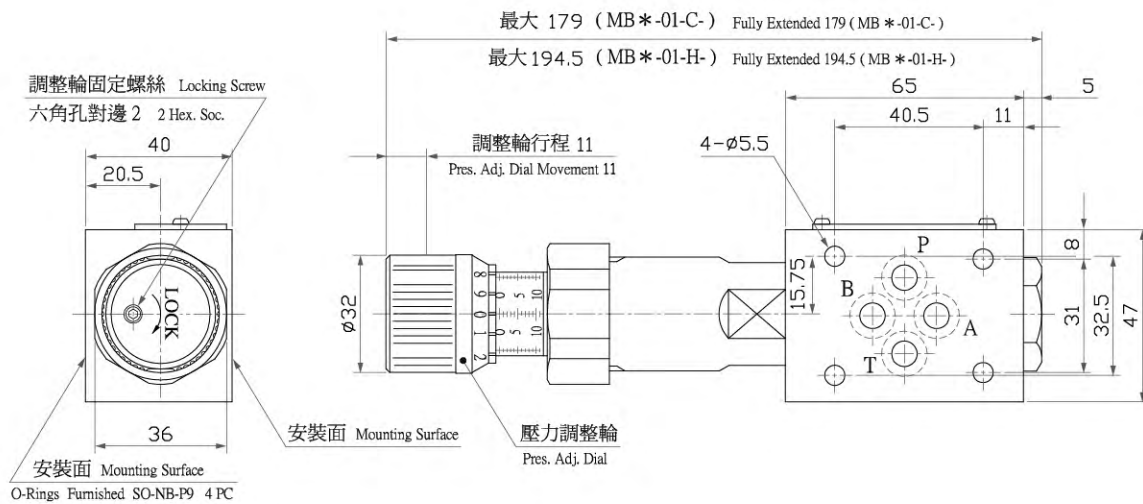

● MBB-01-※-

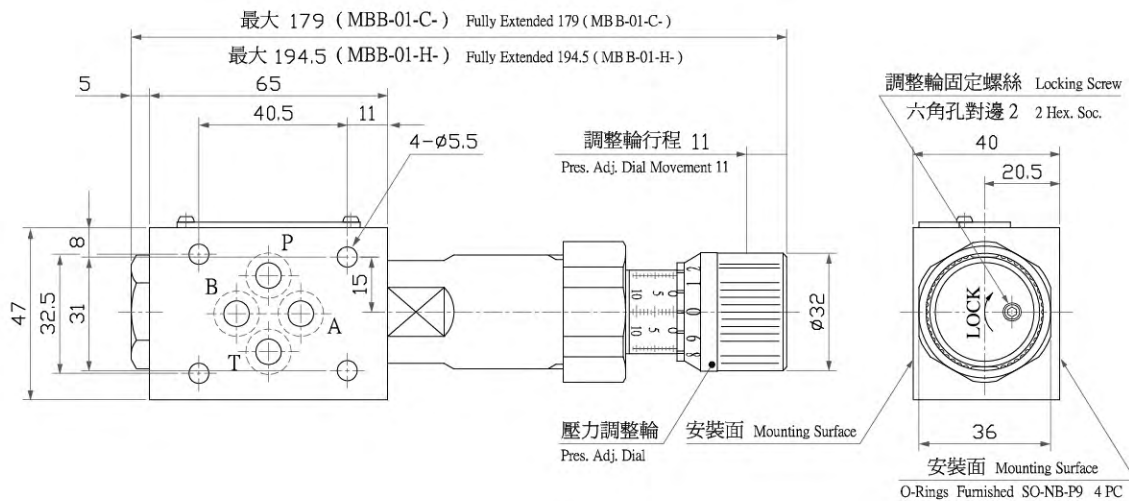

新產品 - 疊加式減壓閥 Pressure Reducing Modular Valves



選購指南 HOW TO ORDER

MRP	-	01	-	B	-	30
系列編號 SERIES NUMBER		口徑 VALVE SIZE		壓力調整範圍 PRESSURE ADJ. RANGE MPa (kgf/cm ²)		設計號 DESIGN NUMBER
Pressure Reducing Modular Valves						
MRP : For P - Line MRA : For A - Line MRB : For B - Line		- 01 : 1/4"		- B : ★ - 7 (70) - C : 3.5 (35) - 14 (140) - H : 7 (70) - 21 (210)		- 30




★ 請詳見最低調整壓力特性 See Min.Adjustment Pressure for the item marked.

規格說明 SPECIFICATIONS

型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
MRP-01-※-30	31.5 (315)	40	1.2
MRA-01-※-30			
MRB-01-※-30			

性能曲線 PERFORMANCE CURVES

Hydraulic Fluid : Viscosity 35 cSt (35 mm²/s) , Specific Gravity 0.850

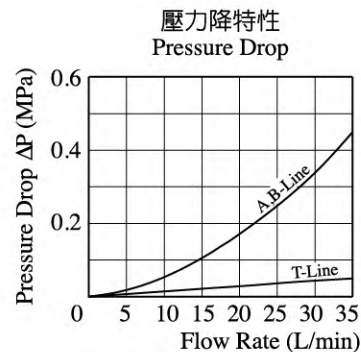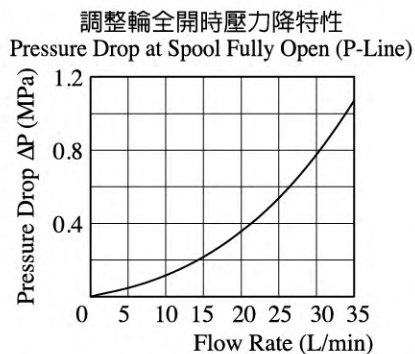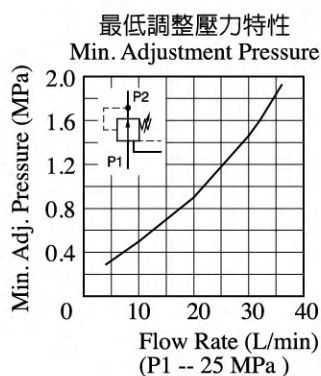


疊加式減壓閥 Pressure Reducing Modular Valves


● MRP-01-※- MRA-01-※-

安裝尺寸符合ISO4401-AB-03-4-A
Mounting Surface:ISO4401-AB-03-4-A


DIMENSIONS IN MILLIMETRES

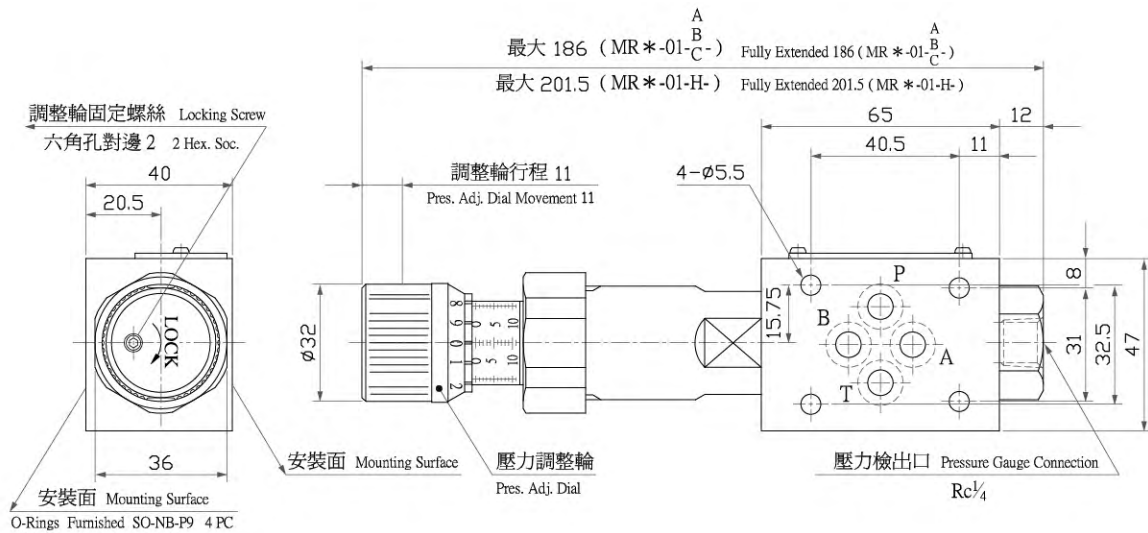

● MRB-01-※-

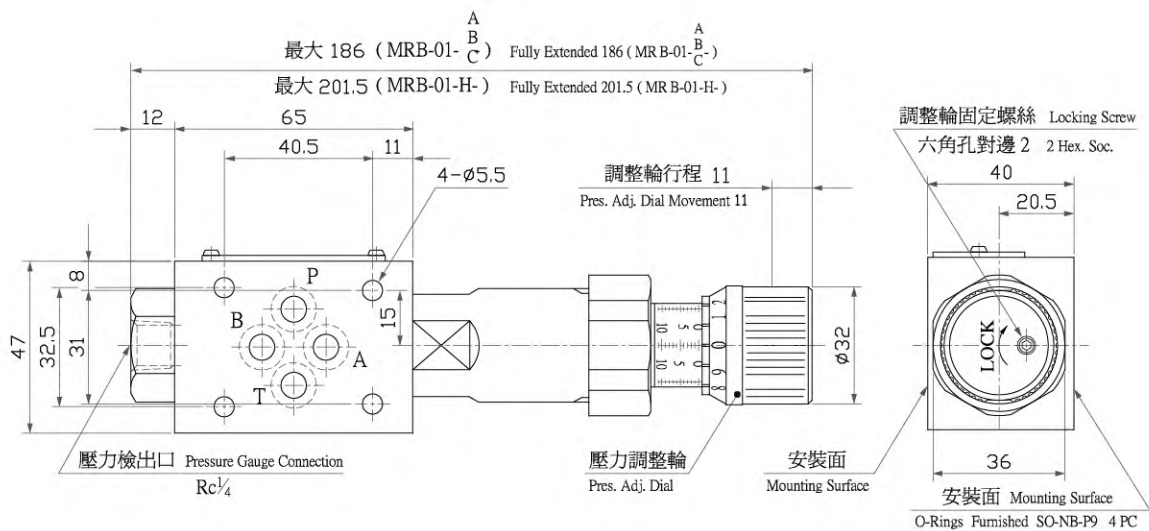

新產品 - 疊加式順序閥 Sequence Modular Valves




選購指南 HOW TO ORDER

MHP	-	01	-	C	-	30
系列編號 SERIES NUMBER		口徑 VALVE SIZE		壓力調整範圍 PRESSURE ADJ. RANGE MPa (kgf/cm ²)		設計號 DESIGN NUMBER
Sequence Modular Valves MHP : For P - Line		- 01 : 1/4"		- C : 0.7 (7) - 14 (140) - H : 7 (70) - 21 (210)		- 30

性能曲線 PERFORMANCE CURVES

Hydraulic Fluid : Viscosity 35 cSt (35 mm²/s) , Specific Gravity 0.850

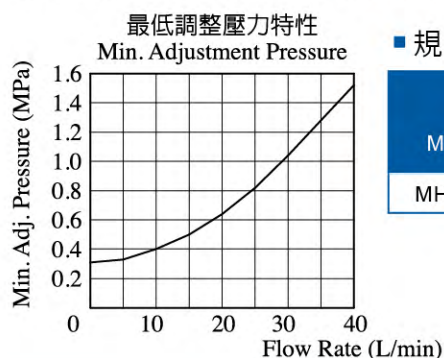


規格說明 SPECIFICATIONS

型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
MHP-01-※-30	31.5 (315)	40	1.1



● MHP- 01-※-

安裝尺寸符合ISO4401-AB-03-4-A
Mounting Surface:ISO4401-AB-03-4-A

DIMENSIONS IN MILLIMETRES

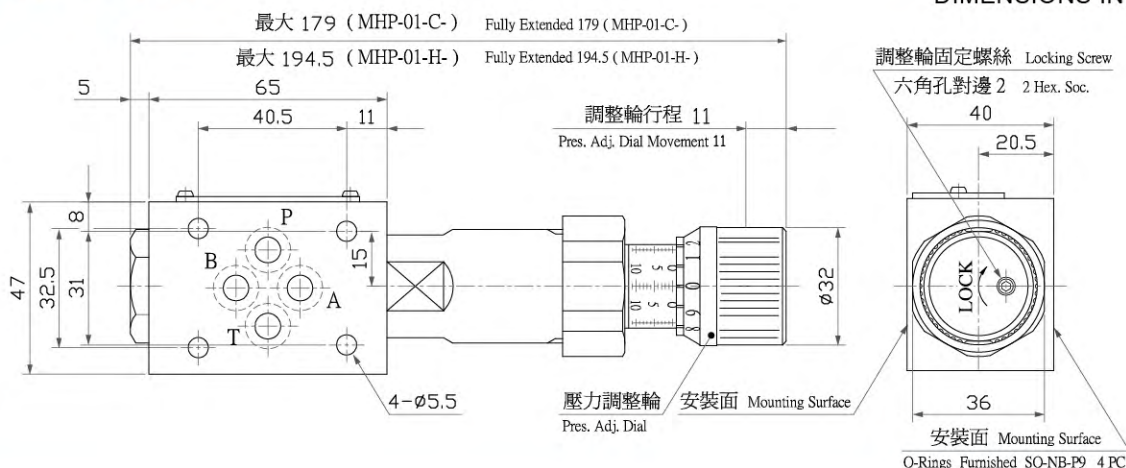

新產品 – 疊加式抗衡閥 Counterbalance Modular Valves



■ 選購指南 HOW TO ORDER




MHA	-	01	-	C	-	30
系列編號 SERIES NUMBER		口徑 VALVE SIZE		壓力調整範圍 PRESSURE ADJ. RANGE MPa (kgf/cm ²)		設計號 DESIGN NUMBER
Counterbalance Modular Valves						
MHA : For A - Line MHB : For B - Line		- 01 : 1/4"		- C : 0.7 (7) - 14 (140) - H : 3.5 (35) - 21 (210)		- 30

■ 規格說明 SPECIFICATIONS

型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
MHA-01-※-30	31.5 (315)	40	1.3
MHB-01-※-30			

■ 性能曲線 PERFORMANCE CURVES

Hydraulic Fluid : Viscosity 35 cSt (35 mm²/s) , Specific Gravity 0.850

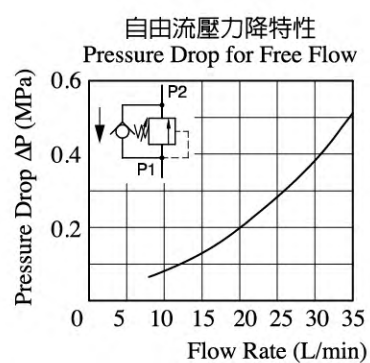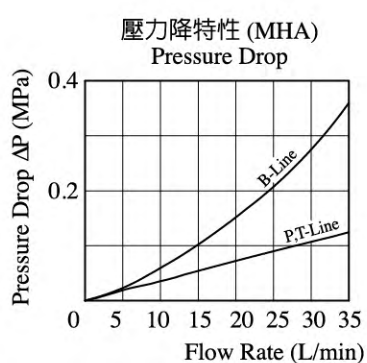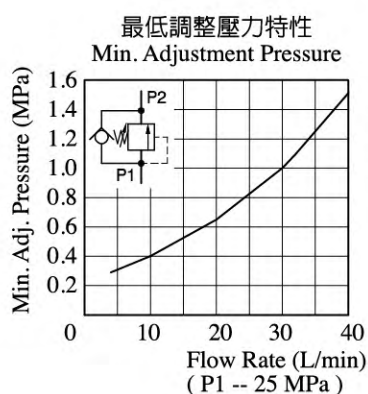


疊加式抗衡閥 Counterbalance Modular Valves


● MHA-01-※-

安裝尺寸符合ISO4401-AB-03-4-A
Mounting Surface:ISO4401-AB-03-4-A


DIMENSIONS IN MILLIMETRES

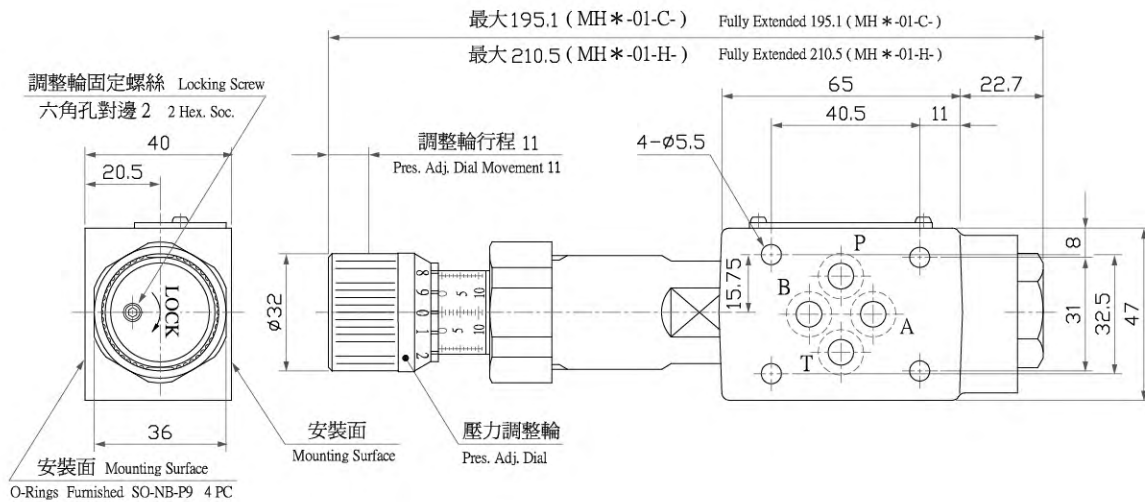

● MHB-01-※-

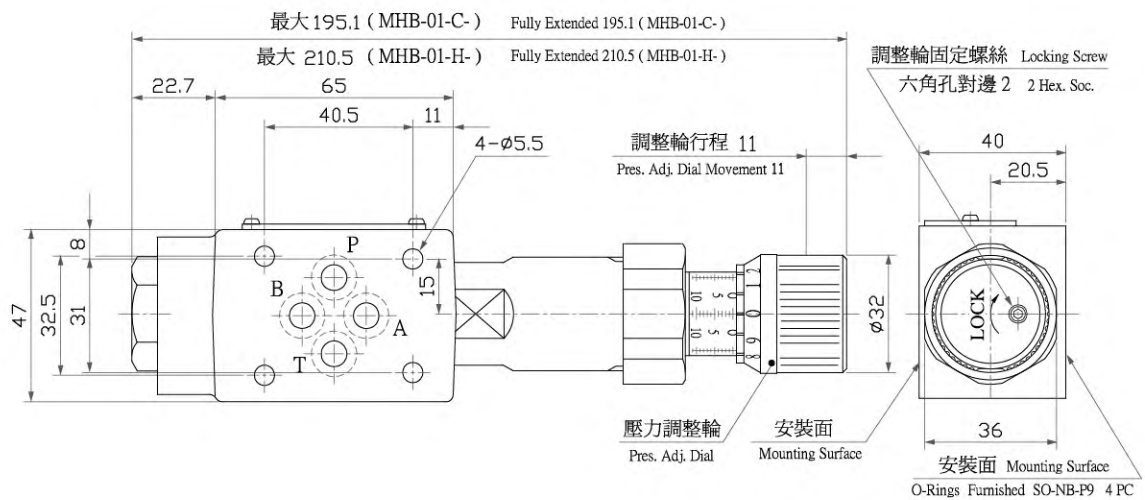

新產品 — 疊加式節流閥 Throttle Modular Valves



■ 選購指南 HOW TO ORDER

MSP	-	01	-	50
系列編號 SERIES NUMBER		口徑 VALVE SIZE		設計號 DESIGN NUMBER
Throttle Modular Valves MSP : For P - Line		- 01 : 1/4"		- 50

■ 規格說明 SPECIFICATIONS


型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
MSP-01-50	31.5 (315)	60 *1	1.2

*1 Maximum flow decreases when the differential pressure is less than 1.5 MPa (15 kgf/cm²).
See "Pressure Drop at Spool fully Open"


■ 性能曲線 PERFORMANCE CURVES

Hydraulic Fluid : Viscosity 35 cSt (35 mm²/s) , Specific Gravity 0.850


調整輪全開時壓力降特性
Pressure Drop at Spool Fully Open (P-Line)

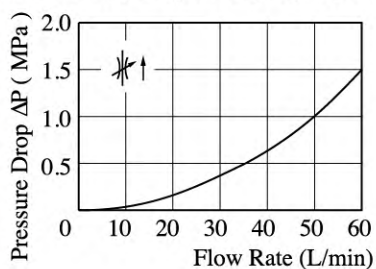

壓力降特性
Pressure Drop

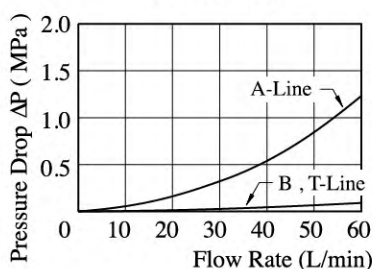

開度-流量特性
Metred Flow vs. Dial Position
ΔP : Differential Pressure (MPa)



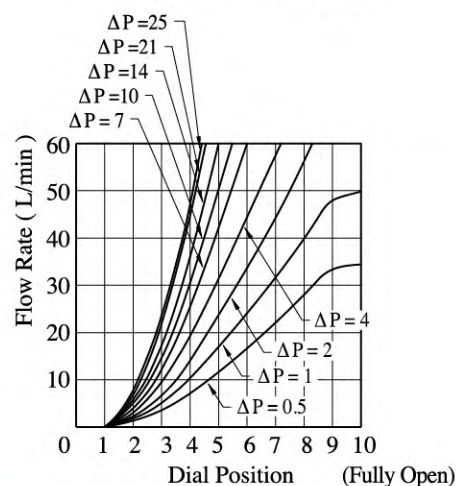


疊加式節流閥 Throttle Modular Valves

● MSP-01


安裝尺寸符合ISO4401-AB-03-4-A
Mounting Surface: ISO4401-AB-03-4-A

DIMENSIONS IN MILLIMETRES

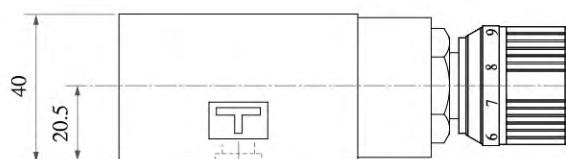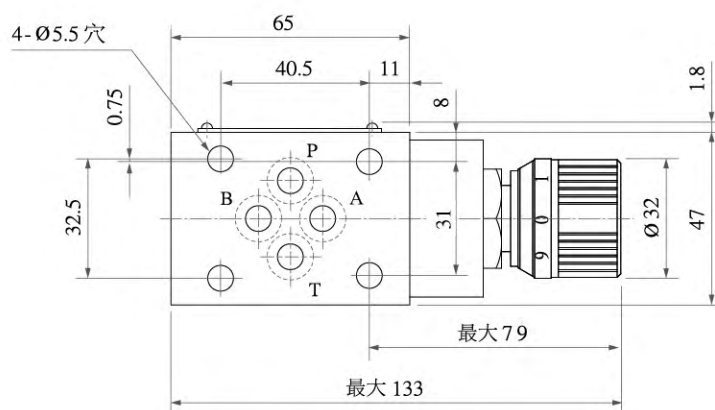

調整輪固定螺絲 Locking Screw
六角孔對邊 2 2 Hex. Soc.

新產品 – 疊加式節流單向閥 Check and Throttle Modular Valves



■ 選購指南 HOW TO ORDER

MSCP	-	01	-	30
系列編號 SERIES NUMBER		口徑 VALVE SIZE		設計號 DESIGN NUMBER
Check and Throttle Modular Valves MSCP : For P - Line		- 01 : 1/4"		- 30

■ 規格說明 SPECIFICATIONS


型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
MSCP-01-30	31.5 (315)	35 *1	1.2

*1 Maximum flow decreases when the differential pressure is less than 0.8 MPa (8 kgf/cm²).
See "Pressure Drop at Spool fully Open"


■ 性能曲線 PERFORMANCE CURVES

Hydraulic Fluid : Viscosity 35 cSt (35 mm²/s) , Specific Gravity 0.850


調整輪全開時壓力降特性
Pressure Drop at Spool Fully Open (P-Line)

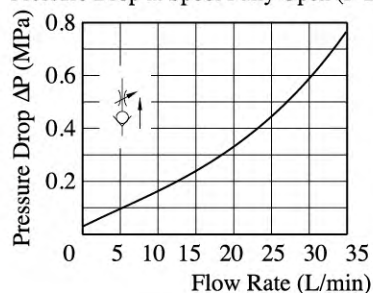

壓力降特性
Pressure Drop

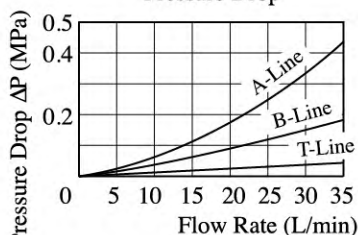

開度-流量特性
Metred Flow vs. Dial Position
ΔP : Differential Pressure (MPa)



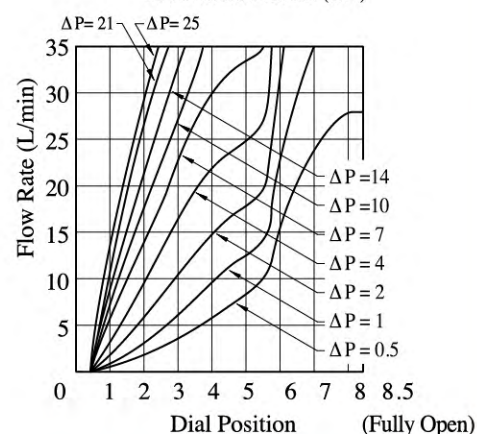


疊加式節流單向閥 Check and Throttle Modular Valves

• MSCP-01


安裝尺寸符合ISO4401-AB-03-4-A
Mounting Surface: ISO4401-AB-03-4-A

DIMENSIONS IN MILLIMETRES

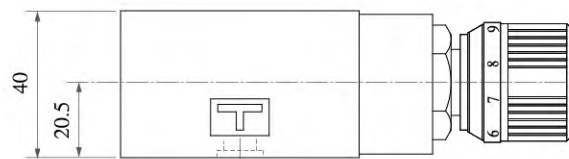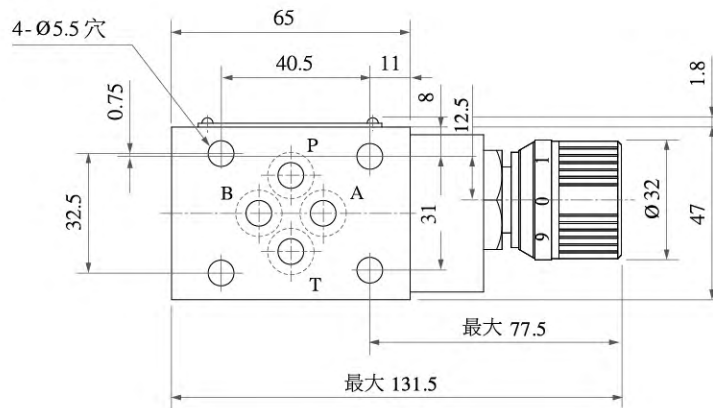

調整輪固定螺絲 Locking Screw
六角孔對邊 2 2 Hex. Soc.

新產品 - 疊加式單向節流閥 Throttle and Check Modular Valves

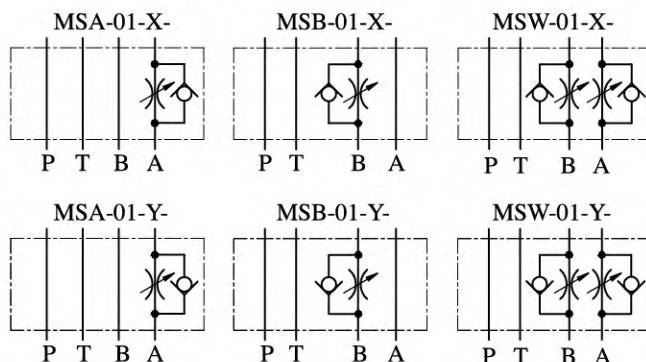

■ 選購指南 HOW TO ORDER



MSA	01	X	50
系列編號 SERIES NUMBER	口徑 VALVE SIZE	節流方向 THROTTLE WAY	設計號 DESIGN NUMBER
Throttle and Check Modular Valves MSA : For A - Line MSB : For B - Line MSW : For AB - Line	- 01 : 1/4"	- X : Meter - Out - Y : Meter - In	- 50

■ 規格說明 SPECIFICATIONS

型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
MSA-01-X(Y)-50	31.5 (315)	60	1.3
MSB-01-X(Y)-50			
MSW-01-X(Y)-50			1.5

■ 性能曲線 PERFORMANCE CURVES



Hydraulic Fluid : Viscosity 35 cSt (35 mm²/s) , Specific Gravity 0.850

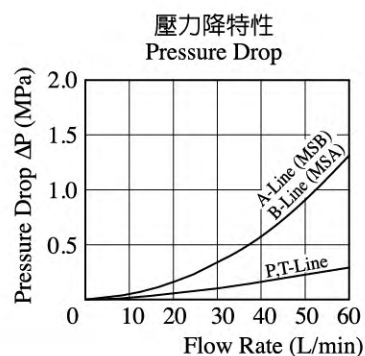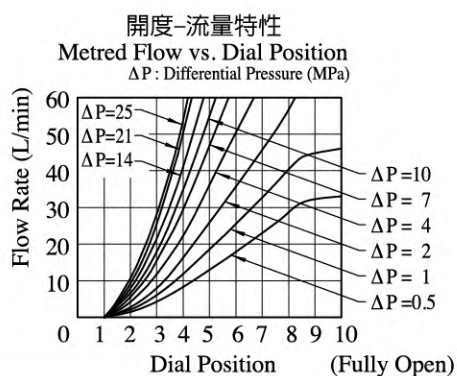

疊加式單向節流閥 Throttle and Check Modular Valves

性能曲線 PERFORMANCE CURVES


Hydraulic Fluid : Viscosity 35 cSt (35 mm²/s) , Specific Gravity 0.850

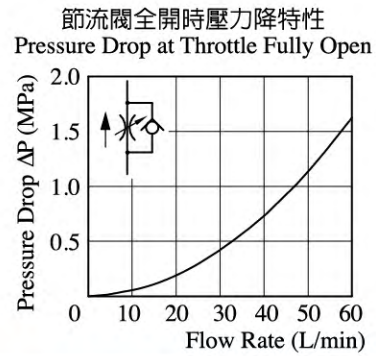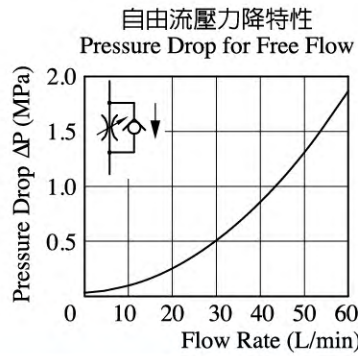


MSW-01-XY- MSW-01-YX-

安裝尺寸符合ISO4401-AB-03-4-A
Mounting Surface:ISO4401-AB-03-4-A

DIMENSIONS IN MILLIMETRES

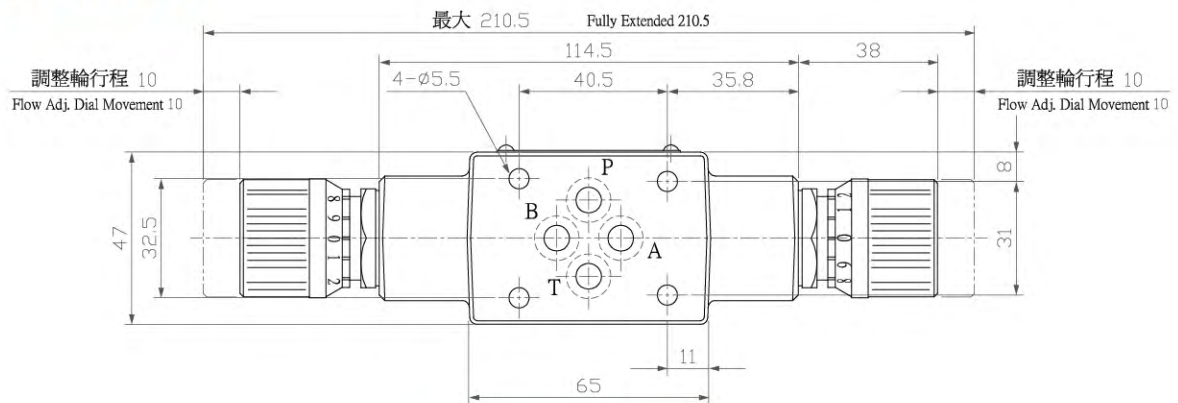

MSW-01-X(Y)-

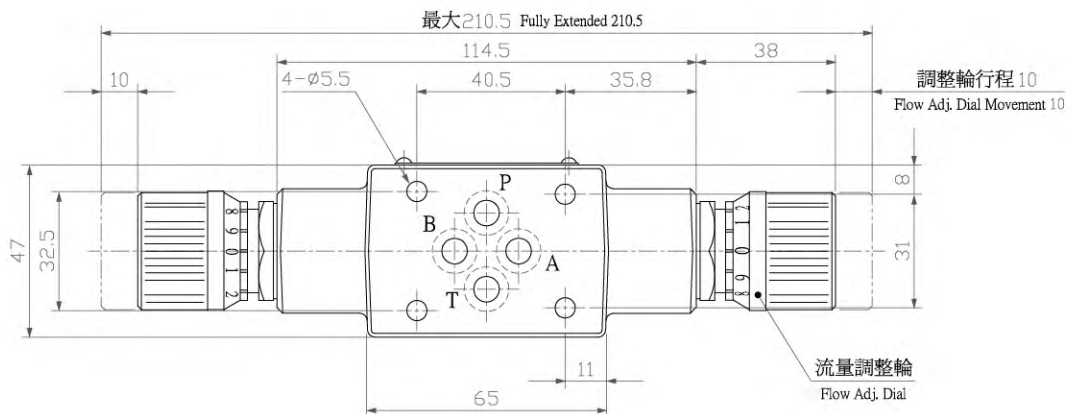


疊加式單向節流閥 Throttle and Check Modular Valves


• MSA-01-X(Y)-

安裝尺寸符合ISO4401-AB-03-4-A
Mounting Surface:ISO4401-AB-03-4-A


DIMENSIONS IN MILLIMETRES

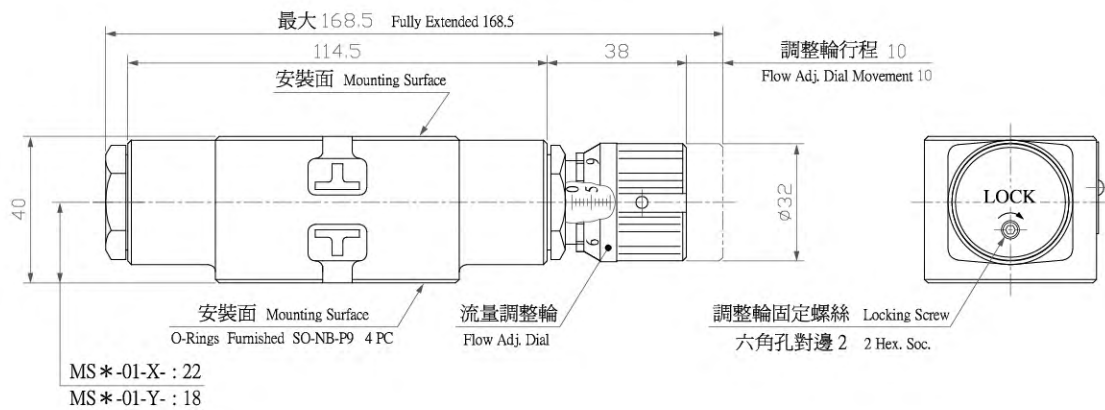

• MSB-01-X(Y)-

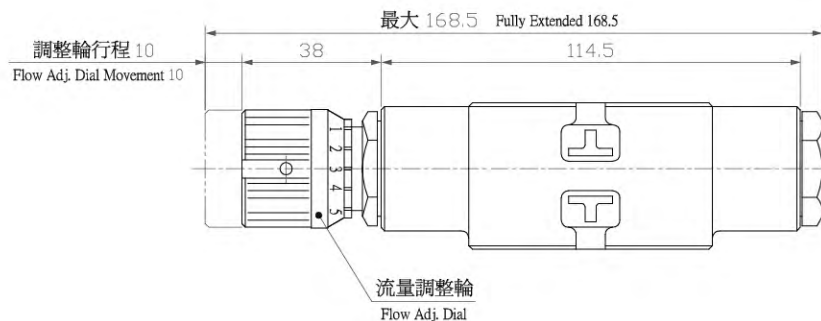

新產品 - 疊加式單向閥 Check Modular Valves

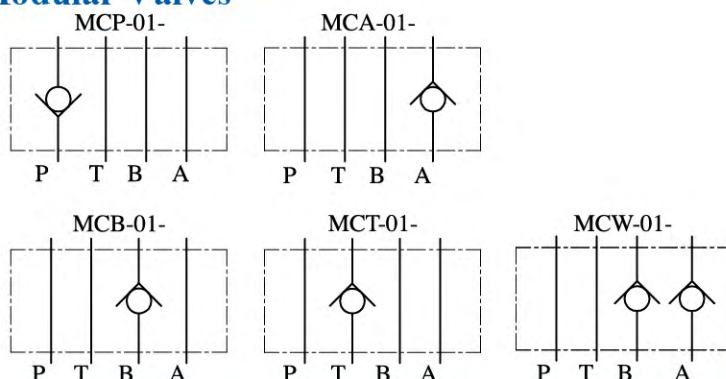

選購指南 HOW TO ORDER



MCP	01	2	30
系列編號 SERIES NUMBER	口徑 VALVE SIZE	啓流壓力 CRACKING PRESSURE MPa (kgf/cm ²)	設計號 DESIGN NUMBER
Check Modular Valves MCP : For P - Line MCA : For A - Line MCB : For B - Line MCT : For T - Line MCW : For AB - Line	- 01 : 1/4"	- 05 : 0.05 (0.5) - 50 : 0.5 (5)	- 30

規格說明 SPECIFICATIONS

型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
MCP-01-※-30	31.5 (315)	40	1.1
MCA-01-※-30			
MCB-01-※-30			
MCT-01-※-30			
MCW-01-※-30			

性能曲線 PERFORMANCE CURVES



Hydraulic Fluid : Viscosity 35 cSt (35 mm²/s) , Specific Gravity 0.850

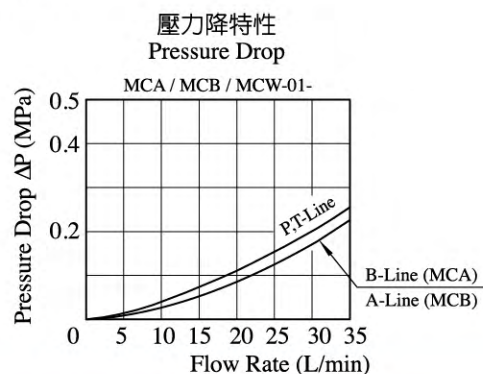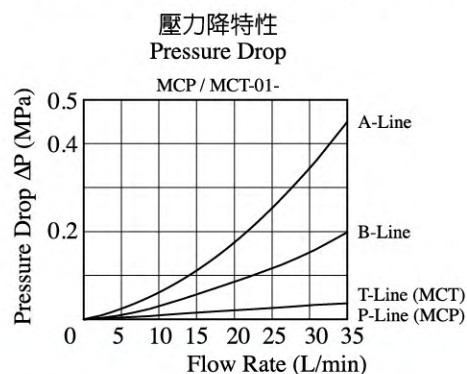

疊加式單向閥 Check Modular Valves

■ 性能曲線 PERFORMANCE CURVES


Hydraulic Fluid : Viscosity 35 cSt (35 mm²/s) , Specific Gravity 0.850

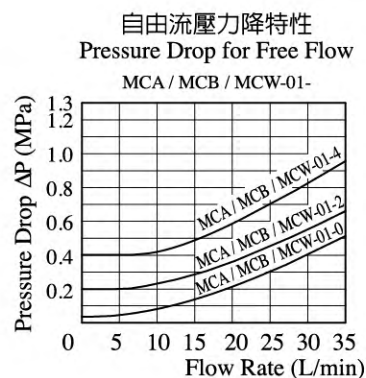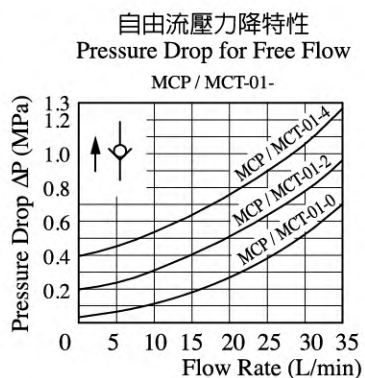


● MCP-01-※- MCT-01-※-

安裝尺寸符合ISO4401-AB-03-4-A
Mounting Surface:ISO4401-AB-03-4-A


DIMENSIONS IN MILLIMETRES

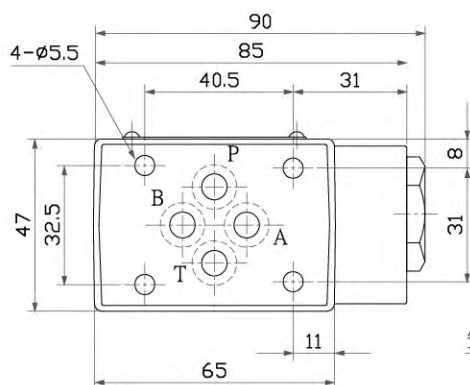


安裝面 Mounting Surface

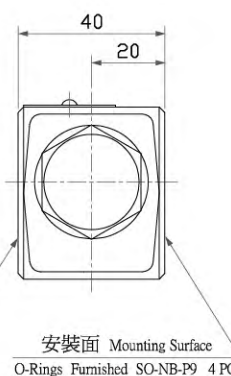




● MCA-01-※- MCB-01-※- MCW-01-※-

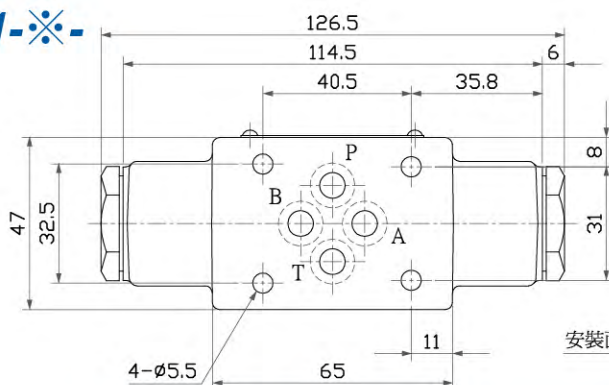

安裝面 Mounting Surface

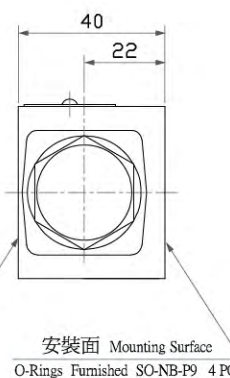

新產品 - 疊加式先導單向閥 Pilot Operated Check Modular Valves



選購指南 HOW TO ORDER



MPA	01	2	40
系列編號 SERIES NUMBER	口徑 VALVE SIZE	啓流壓力 CRACKING PRESSURE MPa (kgf/cm ²)	設計號 DESIGN NUMBER
Pilot Operated Check Modular Valves			
MPA : For P - Line MPB : For B - Line MPW : For AB - Line	- 01 : 1/4"	- 2 : 0.2 (2) - 4 : 0.4 (4)	- 40

規格說明 SPECIFICATIONS

型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
MPA-01-※-40	31.5 (315)	40	1.2
MPB-01-※-40			
MPW-01-※-40			

性能曲線 PERFORMANCE CURVES




Hydraulic Fluid : Viscosity 35 cSt (35 mm²/s) , Specific Gravity 0.850

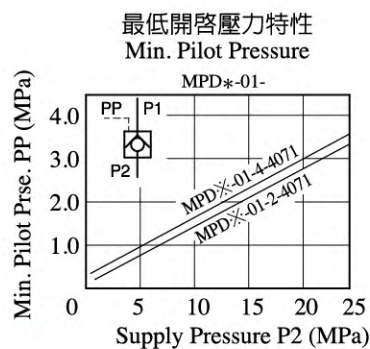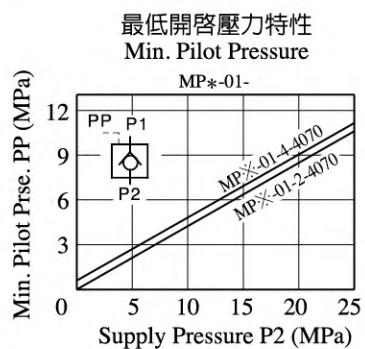

疊加式先導單向閥 Pilot Operated Check Modular Valves

■ 性能曲線 PERFORMANCE CURVES


Hydraulic Fluid : Viscosity 35 cSt (35 mm²/s) , Specific Gravity 0.850

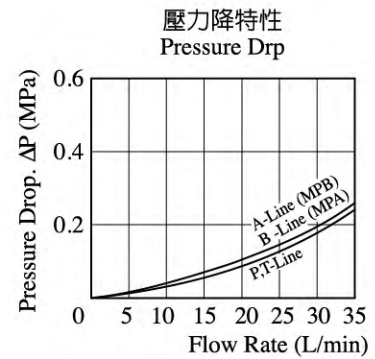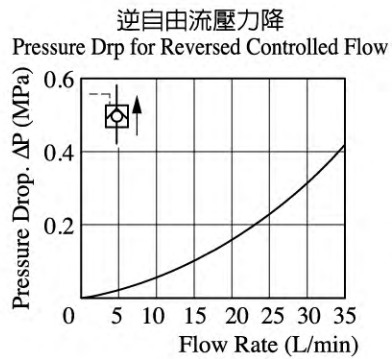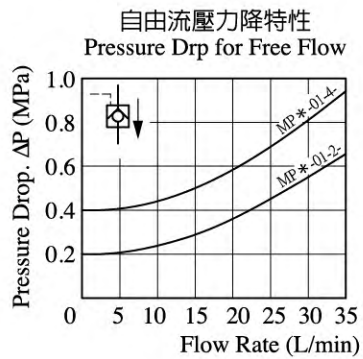






● MP*-01*-

安裝尺寸符合ISO4401-AB-03-4-A
Mounting Surface:ISO4401-AB-03-4-A

DIMENSIONS IN MILLIMETRES

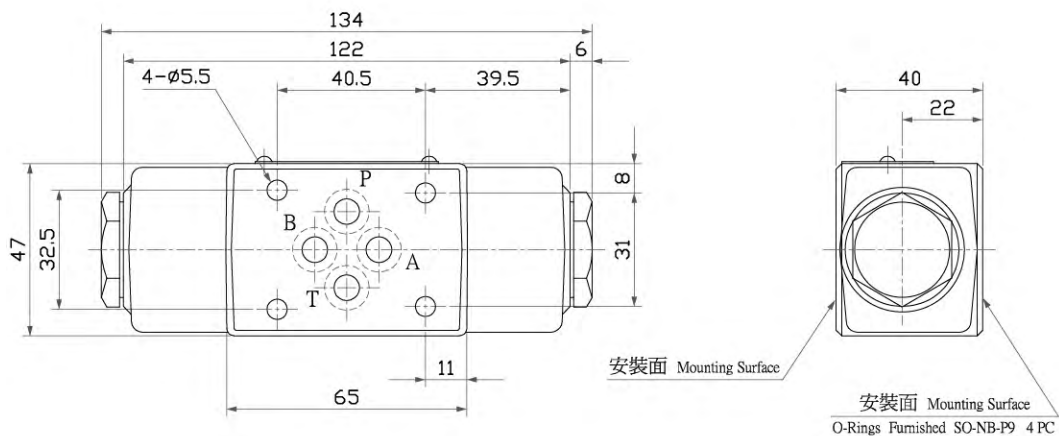

疊加式溢流閥 Relief Modular Valves



■ 選購指南 HOW TO ORDER


MRV	- 02	P	- C	- 20
系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	作動型式 WORKING TYPE	壓力調整範圍 PRESSURE ADJ. RANGE MPa (kgf/cm ²)	設計號 DESIGN NUMBER
MRV	- 02 : 1/4"	P : P Port A : A Port B : B Port	- C : 0.7 (7) - 14 (140) - H : 7 (70) - 21 (210)	- 20 (直動型) Straight Moving Type
		W : A & B Port		
	- 03 : 3/8"	P : P Port A : A Port B : B Port W : A & B Port	- B : 0.7(7) - 7(70) - C : 3.5(35) - 14(140) - H : 7(70) - 21(210)	- 10 (引導型) Booting Type
	- 04 : 1/2"	P : P Port A : A Port B : B Port		

■ 規格說明 SPECIFICATIONS

型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
MRV-02(P/A/B)	25 (250)	40	1.6
MRV-02W			2.6
MRV-03(P/A/B)		80	3.5
MRV-03W			4.74
MRV-04(P/A/B)		300	7.0


疊加式溢流閥 Relief Modular Valves

● MRV-02P

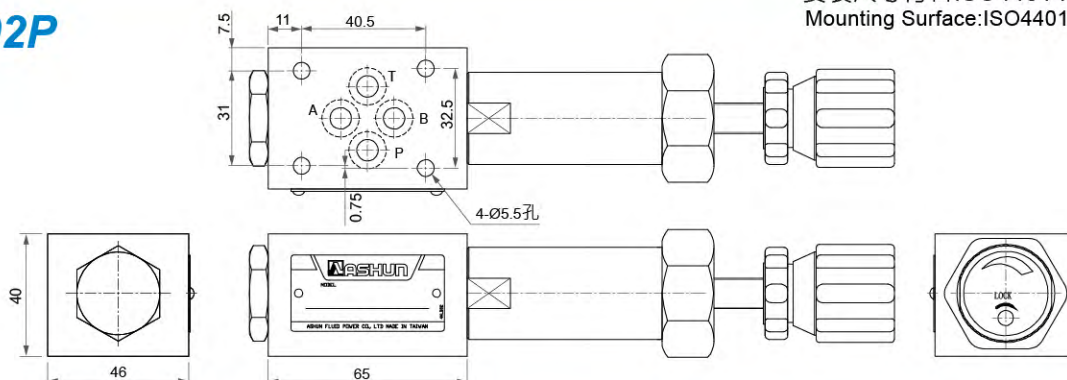


安裝尺寸符合ISO4401-AB-03-4-A
Mounting Surface:ISO4401-AB-03-4-A

● MRV-02(A/B)

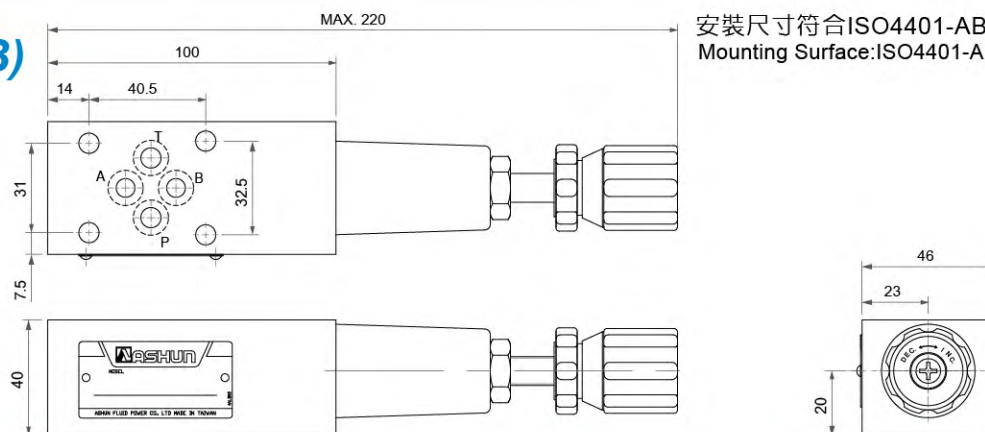


安裝尺寸符合ISO4401-AB-03-4-A
Mounting Surface:ISO4401-AB-03-4-A

● MRV-02W

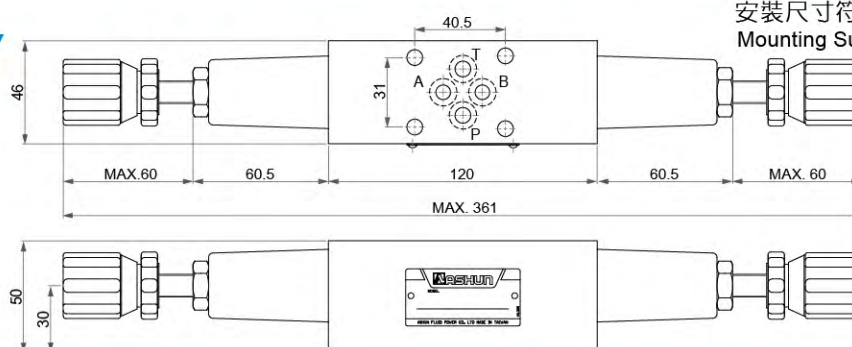

安裝尺寸符合ISO4401-AB-03-4-A
Mounting Surface:ISO4401-AB-03-4-A

● MRV-03(P/A/B)

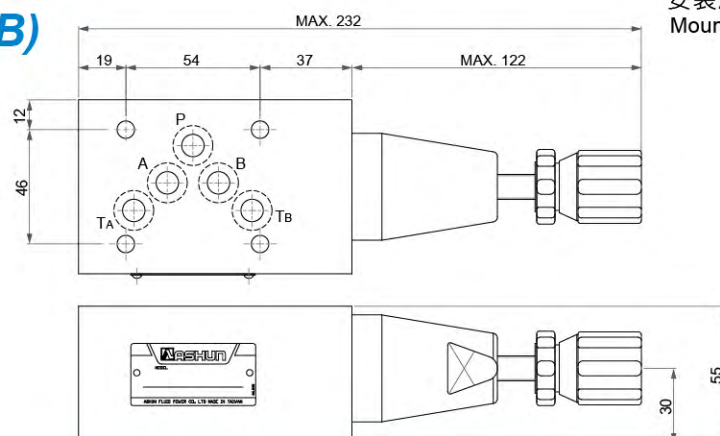


安裝尺寸符合ISO4401-AC-05-4-A
Mounting Surface:ISO4401-AC-05-4-A

疊加式溢流閥 Relief Modular Valves


● MRV-03W

安裝尺寸符合ISO4401-AC-05-4-A
Mounting Surface:ISO4401-AC-05-4-A

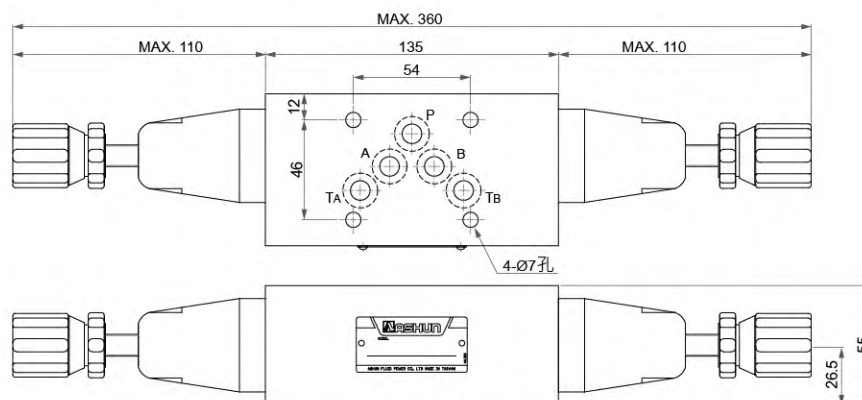


● MRV-04(P/A/B)

安裝尺寸符合ISO4401-AD-07-4-A
Mounting Surface:ISO4401-AD-07-4-A

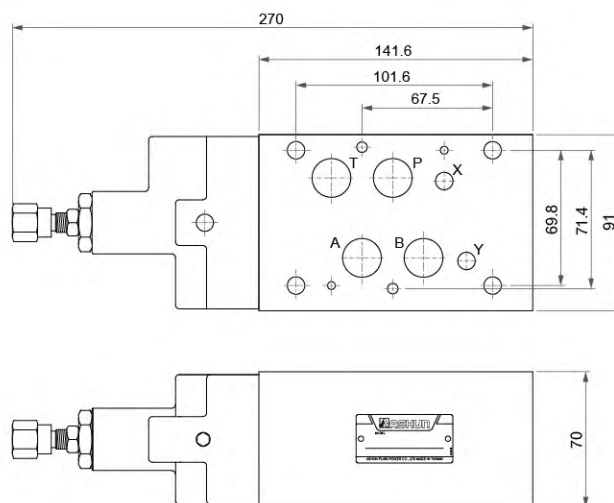

疊加式減壓閥 Reducing Modular Valves

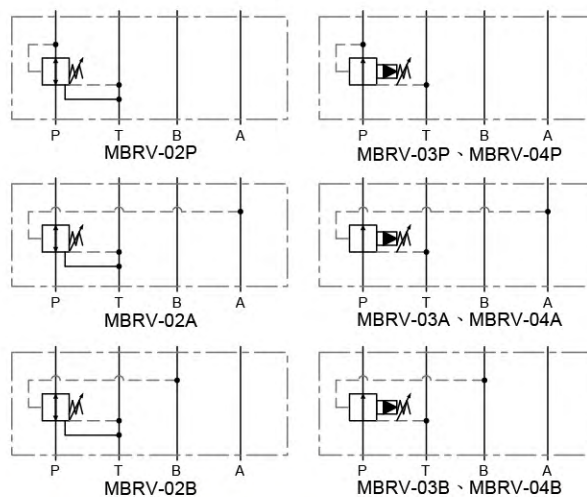

■ 選購指南 HOW TO ORDER

MBRV - 02 P - A - L - 2H - 20						
系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	作動型式 WORKING TYPE	壓力調整範圍 PRESSURE ADJ. RANGE MPa (kgf/cm ²)	調整把手方向 HANDLE DIRECTION	調節部長度 ADJ. LENGTH	設計號 DESIGN NUMBER
MBRV	- 02 : 1/4"	P : P Port A : A Port B : B Port	A : 0.3 (3) - 3.5 (35) B : 0.7 (7) - 7 (70) C : 3.5 (35) - 14 (140) H : 7 (70) - 21 (210)	NONE (B Port) 標準型 Standard Type - L (A Port)	NONE : 95mm - 2H : 125mm - 3H : 155mm - 4H : 195mm (詳如尺寸圖) Details as Specification Drawing	- 10 (標準型) Standard Type - 20 (調整把手直結型) Adj. Handle Type (20型為低底壓專用)
	- 03 : 3/8"		B : 0.7(7) - 7(70) C : 3.5(35) - 14(140) H : 7(70) - 21(210)		NONE	- 10 (標準型) Standard Type - 30 (工具調整型) Tool Adj. Type
	- 04 : 1/2"			NONE		


■ 規格說明 SPECIFICATIONS

型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
MBRV-02(P/A/B)	25 (250)	40	1.3
MBRV-03(P/A/B)		80	2.8
MBRV-04(P/A/B)		300	8.4

疊加式減壓閥 Reducing Modular Valves


● MBRV-02(P/A/B)

安裝尺寸符合ISO4401-AB-03-4-A
Mounting Surface:ISO4401-AB-03-4-A

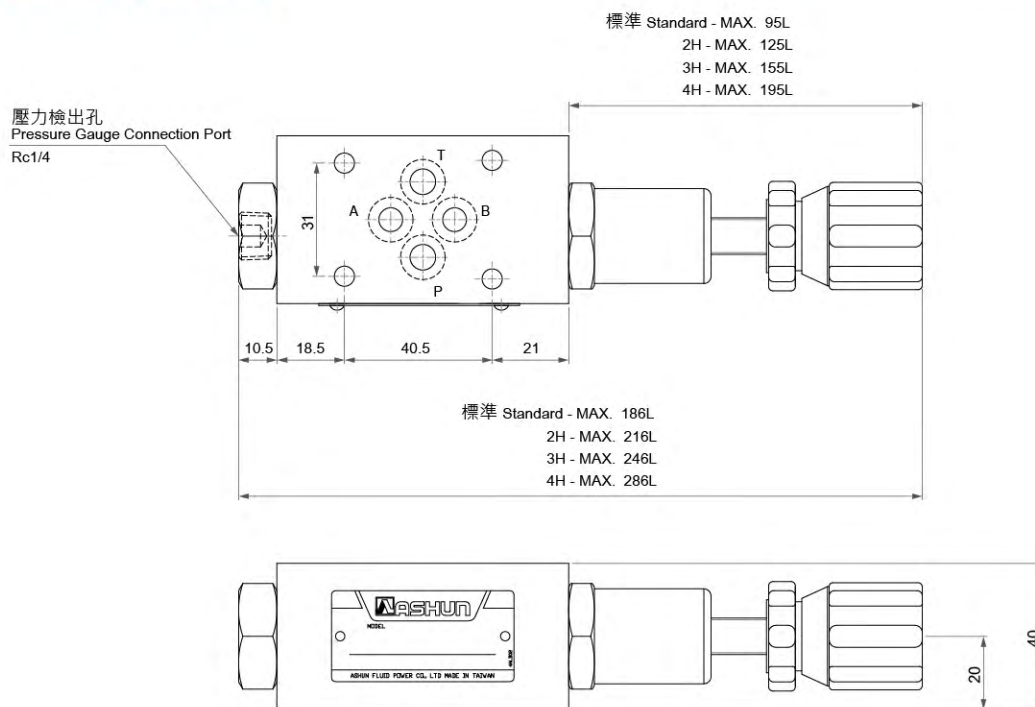

● MBRV-03(P/A/B)


安裝尺寸符合ISO4401-AC-05-4-A
Mounting Surface:ISO4401-AC-05-4-A

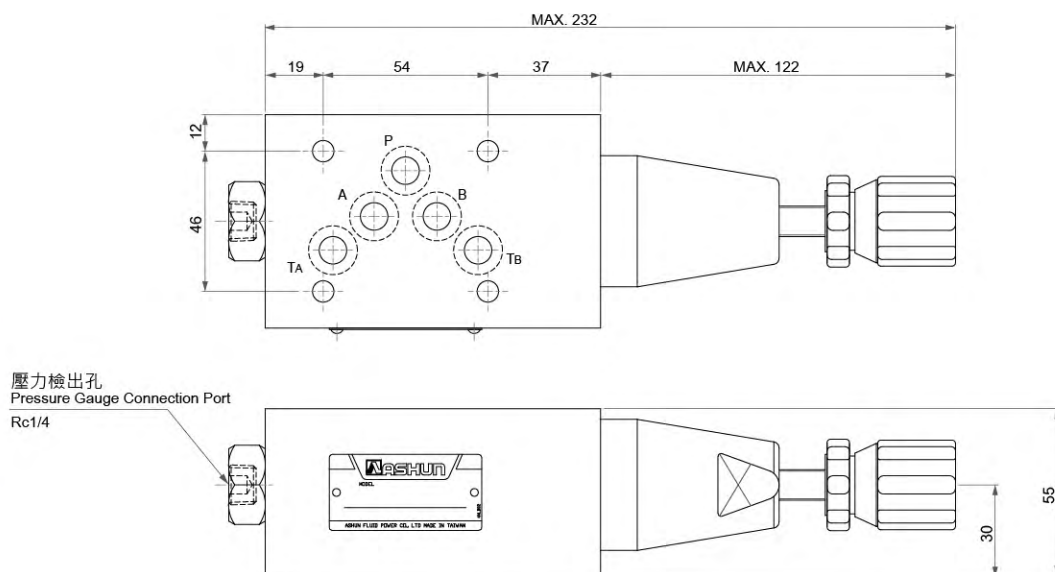


疊加式減壓閥 Reducing Modular Valves

安裝尺寸符合ISO4401-AD-07-4-A
Mounting Surface:ISO4401-AD-07-4-A

● MBRV-04(P/A/B)

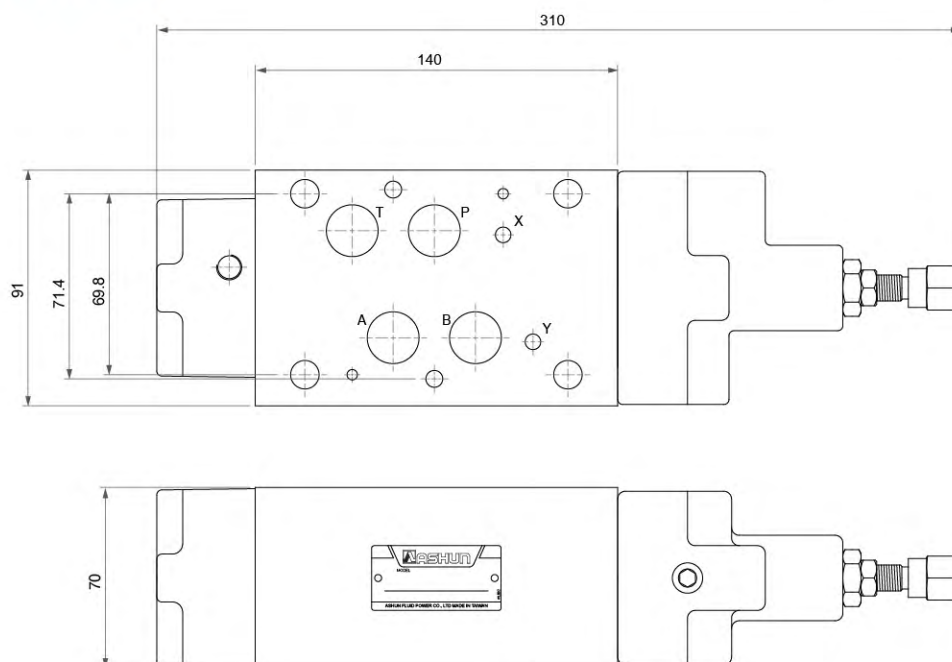

疊加式順序閥 Sequence Modular Valves



選購指南 HOW TO ORDER

MSV - 02 P - A - L - 10					
系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	作動型式 WORKING TYPE	壓力調整範圍 PRESSURE ADJ. RANGE MPa (kgf/cm ²)	調整把手方向 HANDLE DIRECTION	設計號 DESIGN NUMBER
MSV	- 02 : 1/4"	P : P Port	- A : 0.3 (3) - 3.5 (35) - B : 0.7 (7) - 7 (70) - C : 3.5 (35) - 14 (140) - H : 7 (70) - 21 (210)	NONE (B Port) 標準型 Standard Type - L (A Port)	- 10 (標準型) Standard Type
	- 03 : 3/8"		- B : 0.7 (7) - 7 (70) - C : 3.5 (35) - 14 (140) - H : 7 (70) - 21 (210)		


規格說明 SPECIFICATIONS

型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
MSV-02P	25 (250)	40	1.3
MSV-03P		80	4.4

疊加式順序閥 Sequence Modular Valves


安裝尺寸符合ISO4401-AB-03-4-A
Mounting Surface:ISO4401-AB-03-4-A

● MSV-02P


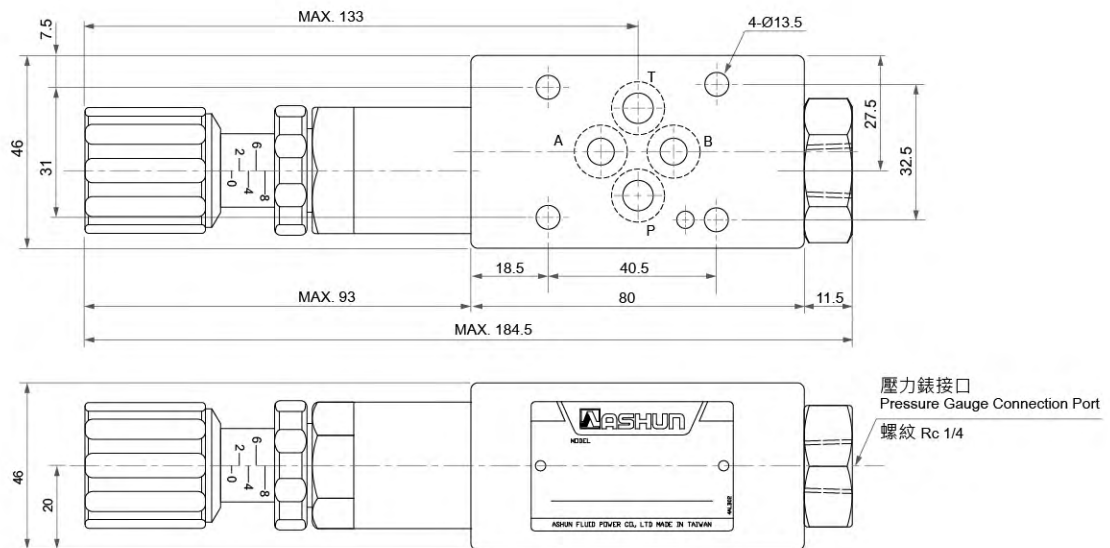


● MSV-03P

安裝尺寸符合ISO4401-AC-05-4-A
Mounting Surface:ISO4401-AC-05-4-A

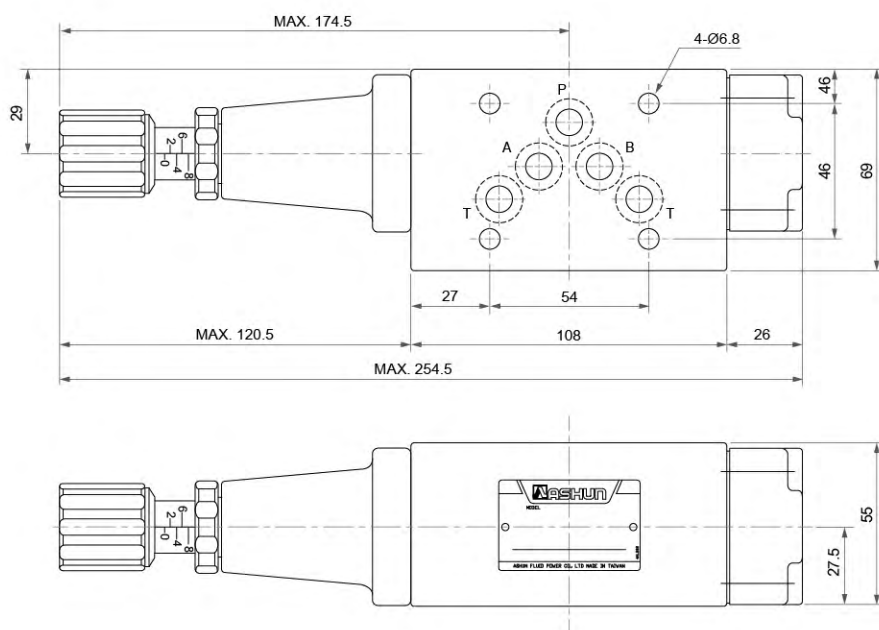

疊加式平衡閥 Counterbalance Modular Valves



■ 選購指南 HOW TO ORDER

MSCV	- 02	A	- A	- L	- 10
系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	作動型式 WORKING TYPE	壓力調整範圍 PRESSURE ADJ. RANGE MPa (kgf/cm ²)	調整把手方向 HANDLE DIRECTION	設計號 DESIGN NUMBER
MSCV	- 02 : 1/4"	A : A Port	- A : 0.3 (3) - 3.5 (35) - B : 0.7 (7) - 7 (70) - C : 3.5 (35) - 14 (140) - H : 7 (70) - 21 (210)	NONE (B Port) 標準型 Standard Type - L (A Port)	- 10 (標準型) Standard Type
		B : B Port			
	- 03 : 3/8"	A : A Port B : B Port	- B : 0.7 (7) - 7 (70) - C : 3.5 (35) - 14 (140) - H : 7 (70) - 21 (210)	NONE	
	- 04 : 1/2"				


■ 規格說明 SPECIFICATIONS

型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
MSCV-02(A/B)	25 (250)	40	1.4
MSCV-03(A/B)		80	4.3
MSCV-04(A/B)		300	8.7


疊加式平衡閥 Counterbalance Modular Valves

安裝尺寸符合ISO4401-AB-03-4-A
Mounting Surface:ISO4401-AB-03-4-A

• MSCV-02(A/B)

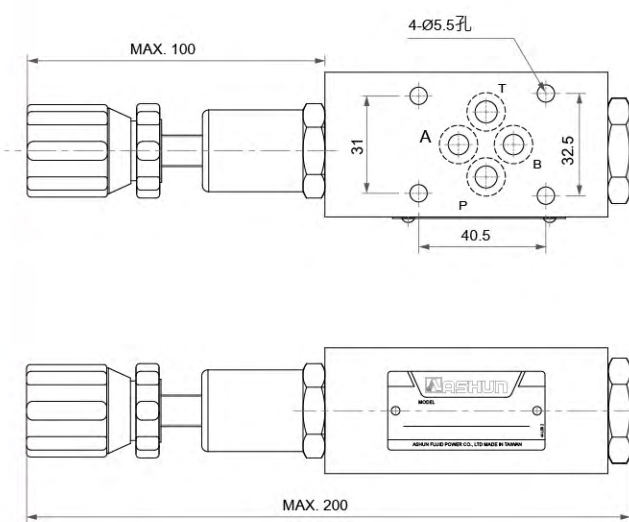


MSCV-02A

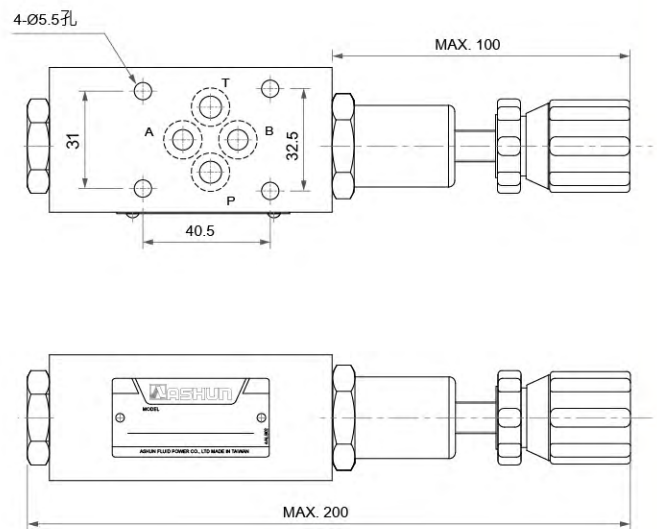


MSCV-02B

• MSCV-03(A/B)

安裝尺寸符合ISO4401-AC-05-4-A
Mounting Surface:ISO4401-AC-05-4-A

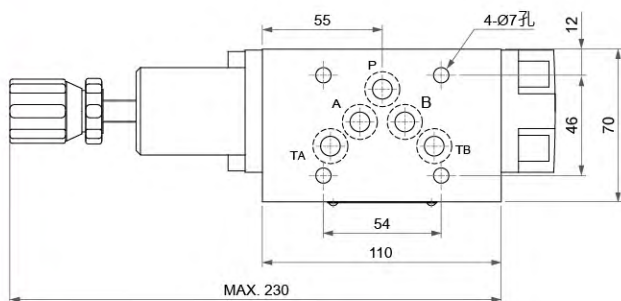

MSCV-03A

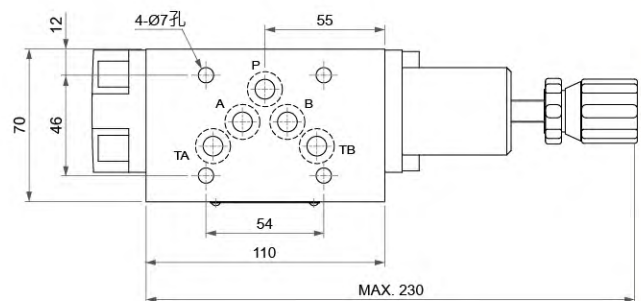


MSCV-03B


疊加式平衡閥 Counterbalance Modular Valves

● MSCV-04(A/B)

安裝尺寸符合ISO4401-AD-07-4-A
Mounting Surface: ISO4401-AD-07-4-A

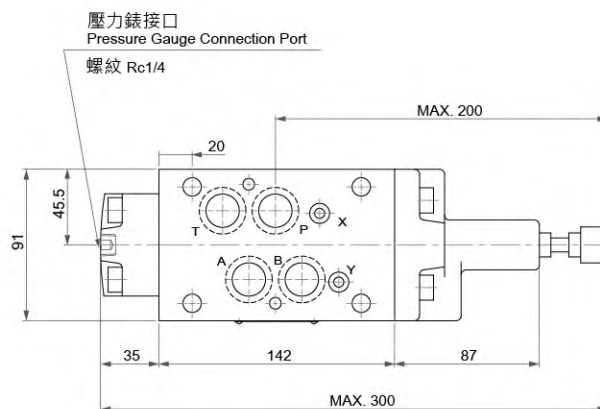


MSCV-04A

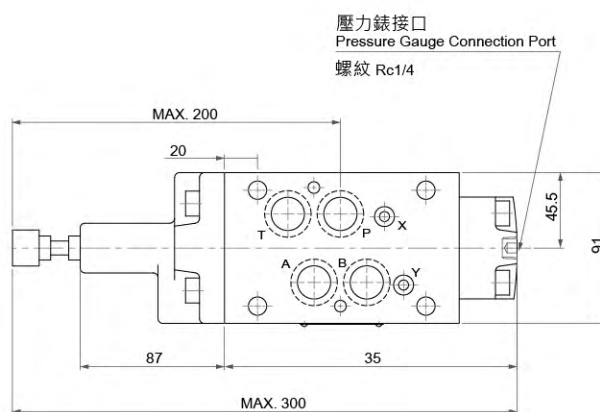

MSCV-04B

疊加式單向閥 Check Modular Valves

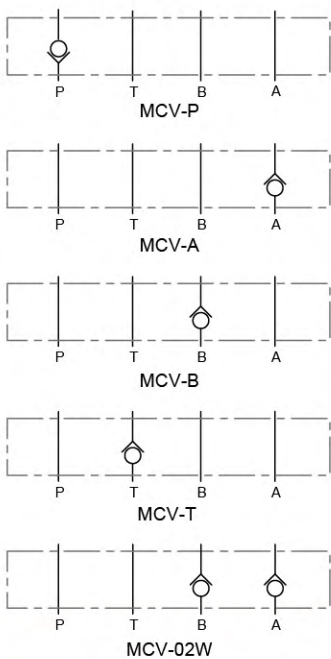

選購指南 HOW TO ORDER


MCV	- 02	P	- 05	- 10
系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	作動型式 WORKING TYPE	啓流壓力 CRACKING PRESSURE MPa (kgf/cm ²)	設計號 DESIGN NUMBER
MCV	- 02 : 1/4"	P : P Port A : A Port B : B Port T : T Port W : A & B Port	- 05 : 0.05 (0.5) - 50 : 0.5 (5)	- 10 (標準型) Standard Type
	- 03 : 3/8"	P : P Port A : A Port B : B Port T : T Port		
	- 04 : 1/2"	P : P Port A : A Port B : B Port T : T Port		

規格說明 SPECIFICATIONS

型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
MCV-02(P/A/B/T)	25 (250)	40	1
MCV-02W			1.4
MCV-03(P/A/B/T)		80	2.5
MCV-04(P/A/B/T)		300	4.8


疊加式單向閥 Check Modular Valves

● MCV-02(P/A/B/T)

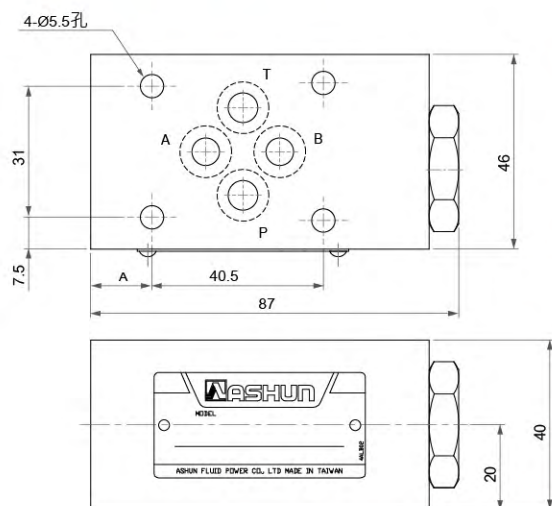


● MCV-02W

安裝尺寸符合ISO4401-AB-03-4-A
Mounting Surface:ISO4401-AB-03-4-A

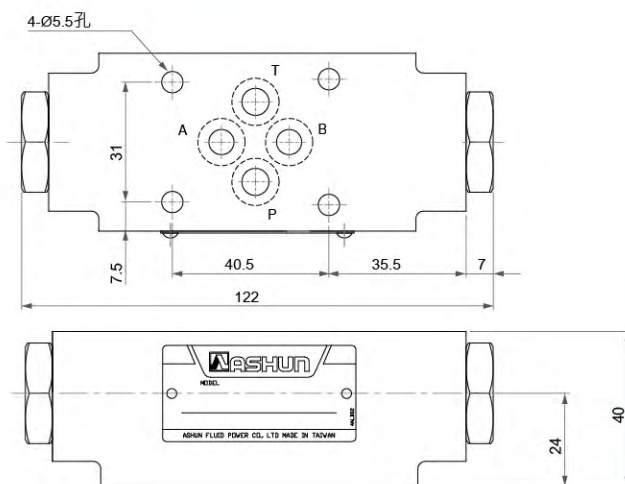


● MCV-03(P/A/B/T)

安裝尺寸符合ISO4401-AB-03-4-A
Mounting Surface:ISO4401-AB-03-4-A

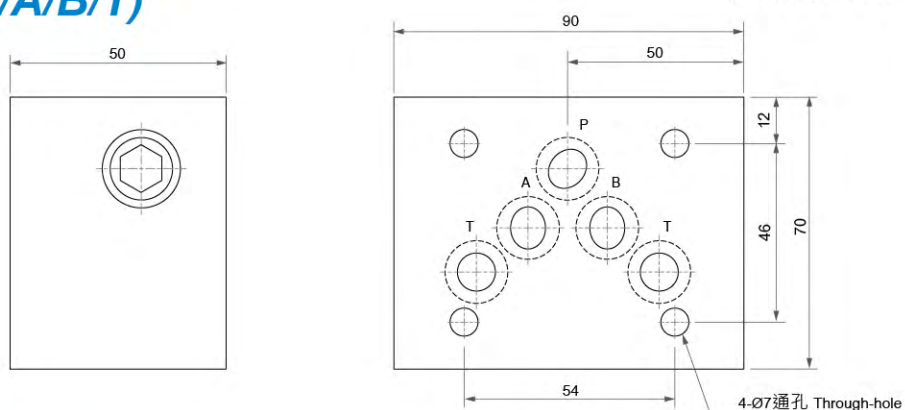


● MCV-04(P/A/B/T)

安裝尺寸符合ISO4401-AC-05-4-A
Mounting Surface:ISO4401-AC-05-4-A

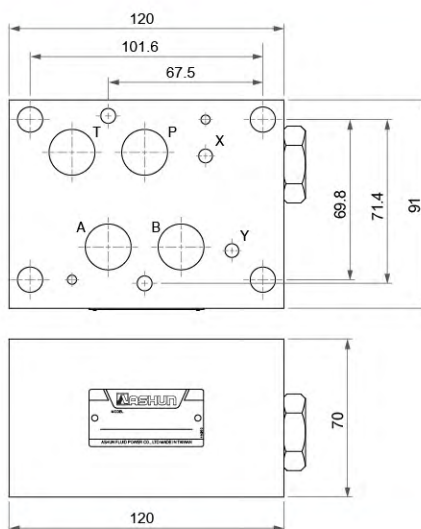

疊加式液控單向閥 Pilot Operated Check Modular Valves

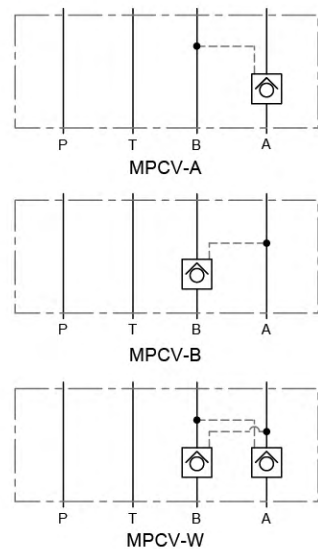

選購指南 HOW TO ORDER

MPCV		-	02	A	-	05	-	10
系列編號 SERIES NUMBER		閥口徑 VALVE SIZE		作動型式 WORKING TYPE		啓流壓力 CRACKING PRESSURE MPa (kgf/cm ²)		設計號 DESIGN NUMBER
MPCV		- 02 : 1/4"		A : A Port B : B Port W : A & B Port		- 05 : 0.05 (0.5) - 50 : 0.5 (5)		- 10 (標準型) Standard Type
		- 03 : 3/8"						


規格說明 SPECIFICATIONS

型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
MPCV-02(A/B)	25 (250)	40	1.2
MPCV-02W			1.4
MPCV-03(A/B)		80	2.8
MPCV-03W			3.1

疊加式液控單向閥 Pilot Operated Check Modular Valves


● MPCV-02 ※

安裝尺寸符合ISO4401-AC-05-4-A
Mounting Surface: ISO4401-AC-05-4-A

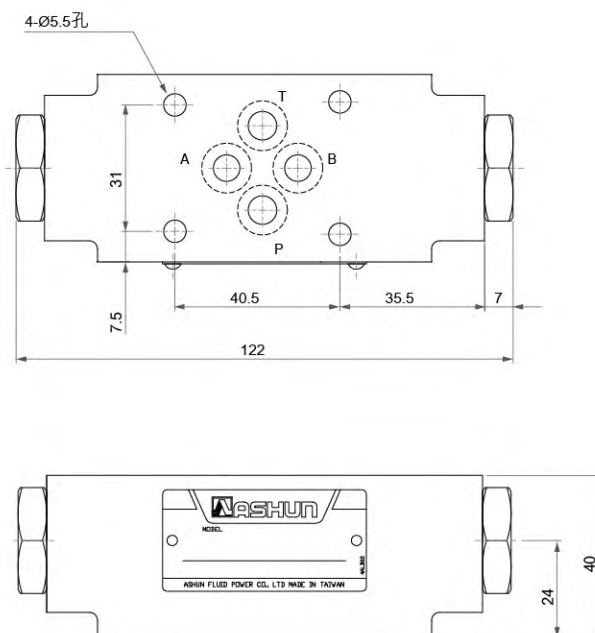


● MPCV-03 ※

安裝尺寸符合ISO4401-AE-08-4-A
Mounting Surface: ISO4401-AE-08-4-A

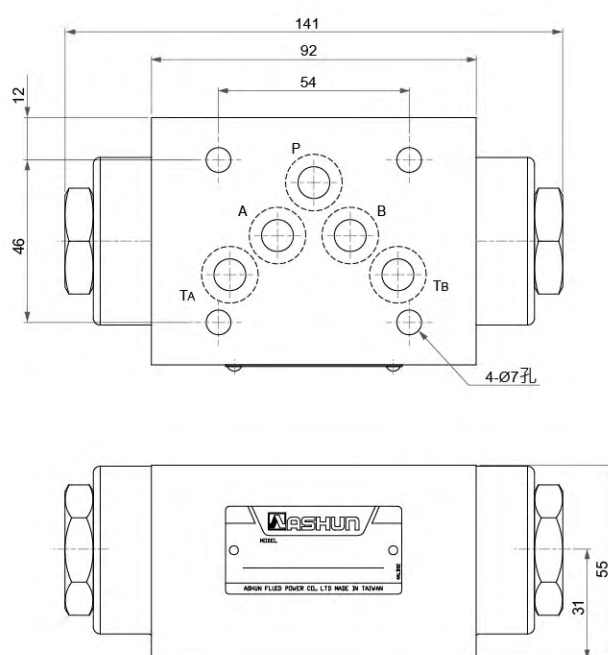

釋壓型疊加式液控單向閥
 Decompressing Pilot Operated Check Modular Valves

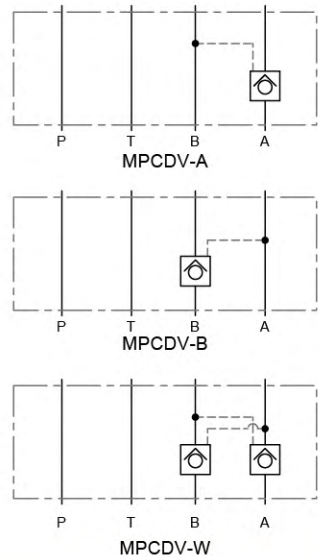

選購指南
 HOW TO ORDER

MPCDV - 02 A - 05 - 10				
系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	作動型式 WORKING TYPE	啓流壓力 CRACKING PRESSURE MPa (kgf/cm ²)	設計號 DESIGN NUMBER
MPCDV	- 02 : 1/4"	A : A Port B : B Port W : A & B Port	- 05 : 0.05 (0.5) - 50 : 0.5 (5)	- 10 (標準型) Standard Type
	- 03 : 3/8"			
	- 04 : 1/2"			


規格說明
 SPECIFICATIONS

型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
MPCDV-02(A/B)	25 (250)	40	1.2
MPCDV-02W			1.5
MPCDV-03(A/B)		80	2.9
MPCDV-03W			3.2
MPCDV-04(A/B)		300	7.3
MPCDV-04W			7.4

釋壓型疊加式液控單向閥 Decompressing Pilot Operated Check Modular Valves


安裝尺寸符合ISO4401-AB-03-4-A
Mounting Surface:ISO4401-AB-03-4-A

● MPCDV-02 ❖

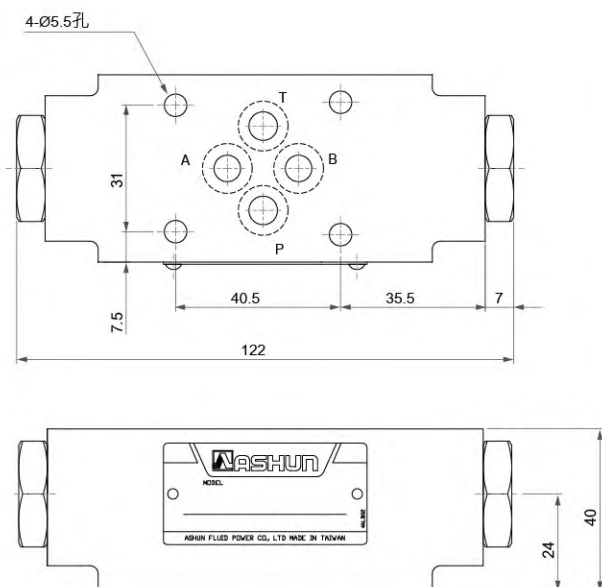


安裝尺寸符合ISO4401-AC-05-4-A
Mounting Surface:ISO4401-AC-05-4-A

● MPCDV-03 ❖


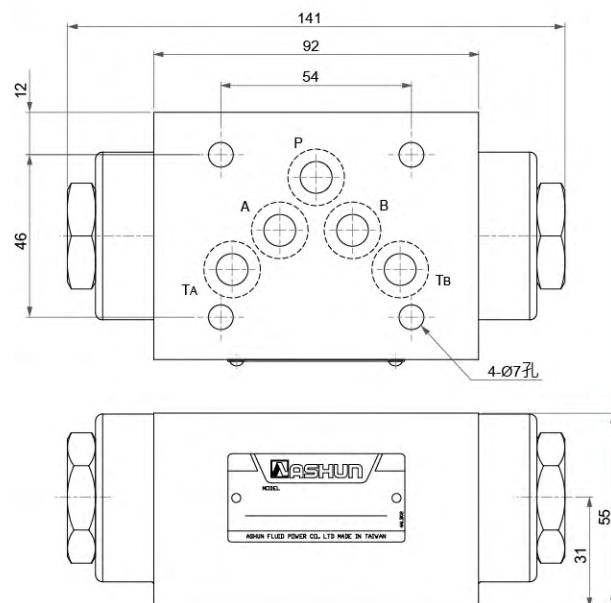


安裝尺寸符合ISO4401-AD-07-4-A
Mounting Surface:ISO4401-AD-07-4-A

● MPCDV-04 ❖

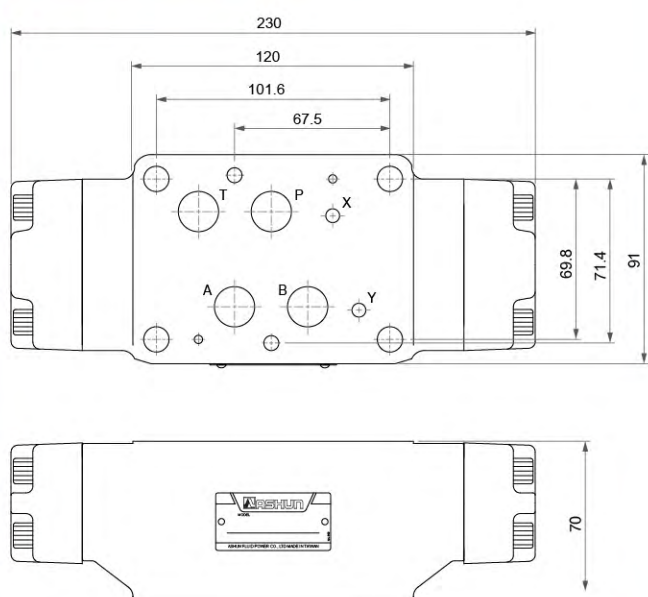

疊加式節流閥 Throttle Modular Valves



選購指南 HOW TO ORDER

MTV	-	02	P	-	10
系列編號 SERIES NUMBER		閥口徑 VALVE SIZE	作動型式 WORKING TYPE		設計號 DESIGN NUMBER
MTV		- 02 : 1/4"	P : P Port T : T Port		- 10 (標準型) Standard Type
		- 03 : 3/8"			


規格說明 SPECIFICATIONS

型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
MTV-02(P/T)	25 (250)	40	1
MTV-03(P/T)		80	2.5

疊加式節流閥 Throttle Modular Valves


• MTV-02 (P/T)

安裝尺寸符合ISO4401-AB-03-4-A
Mounting Surface:ISO4401-AB-03-4-A

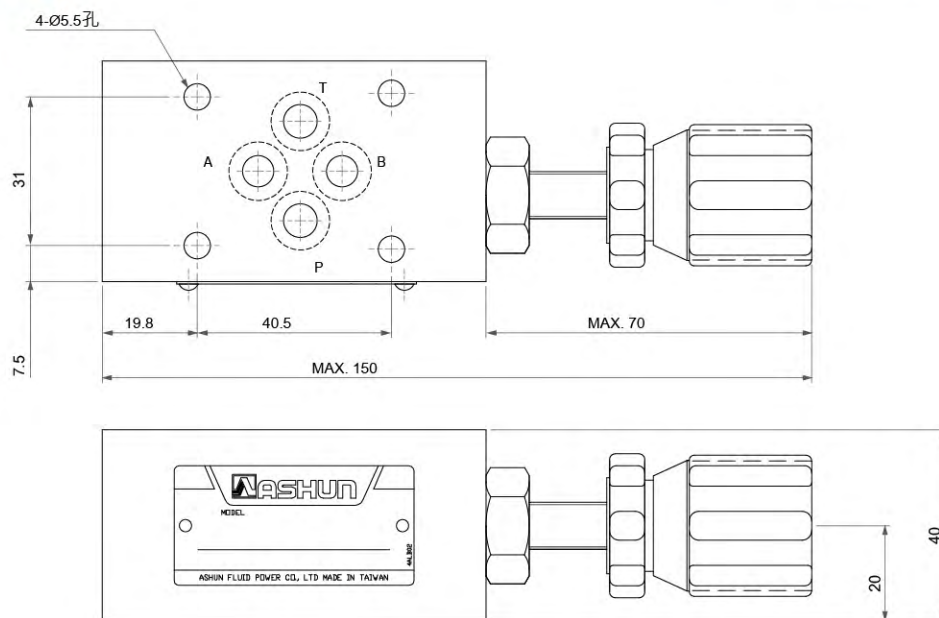


• MTV-03P

安裝尺寸符合ISO4401-AC-05-4-A
Mounting Surface:ISO4401-AC-05-4-A

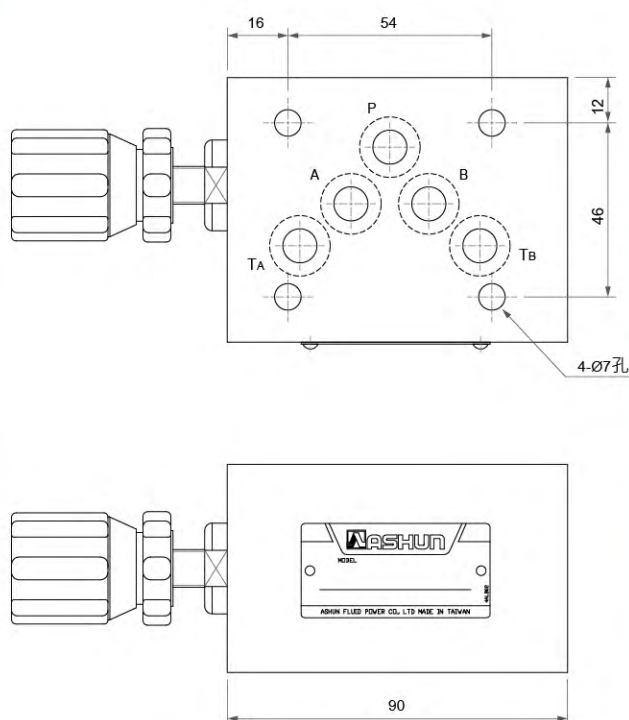


• MTV-03T

安裝尺寸符合ISO4401-AC-05-4-A
Mounting Surface:ISO4401-AC-05-4-A

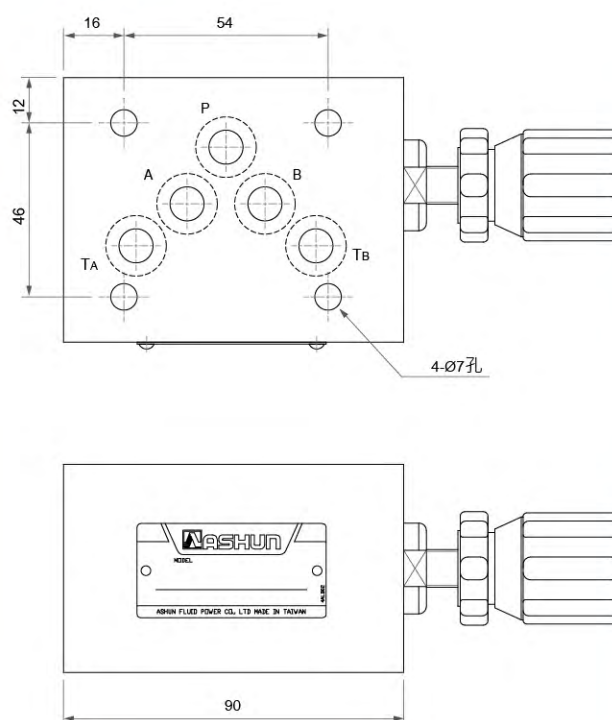

疊加式單向節流閥 Throttle and Check Modular Valves

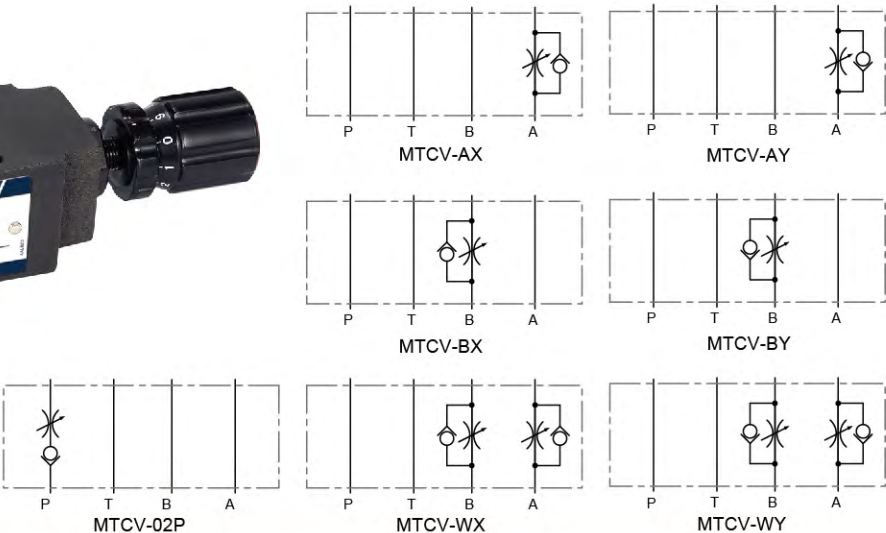

選購指南 HOW TO ORDER

MTCV	- 02	A	- X	- 10
系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	作動型式 WORKING TYPE	節流方向 THROTTLE WAY	設計號 DESIGN NUMBER
MTCV	- 02 : 1/4"	A : A Port B : B Port W : A & B Port	- X : 回油節流 Meter - Out - Y : 進油節流 Meter - In	- 10 (標準型) Standard Type
	- 03 : 3/8"	P : P Port	NONE	
	- 04 : 1/2"	A : A Port B : B Port W : A & B Port	- X : 回油節流 Meter - Out - Y : 進油節流 Meter - In	


規格說明 SPECIFICATIONS

型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
MTCV-02(P/A/B)	25 (250)	40	1.4
MTCV-02W			1.7
MTCV-03(A/B)		80	2.8
MTCV-03W			3.2
MTCV-04(A/B)		300	6.5
MTCV-04W			6.7

疊加式單向節流閥 Throttle and Check Modular Valves

● MTCV-02P


安裝尺寸符合ISO4401-AB-03-4-A
Mounting Surface:ISO4401-AB-03-4-A

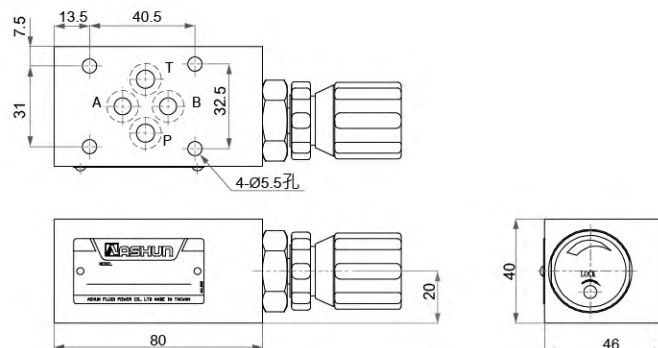

● MTCV-03W-(X/Y)

安裝尺寸符合ISO4401-AC-05-4-A
Mounting Surface:ISO4401-AC-05-4-A


● MTCV-03W-(X/Y)

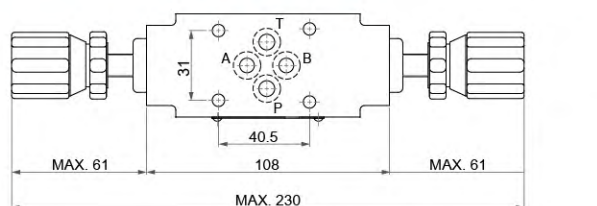


MTCV-02W-X



MTCV-02W-Y

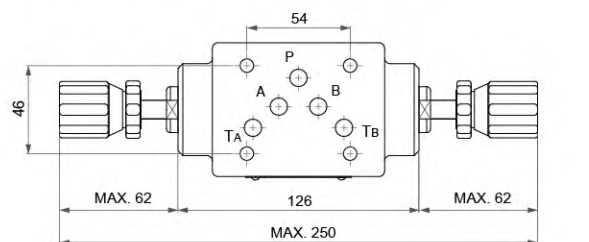


MTCV-03W-X



MTCV-03W-Y

● MTCV-04※

安裝尺寸符合ISO4401-AE-08-4-A
Mounting Surface:ISO4401-AE-08-4-A

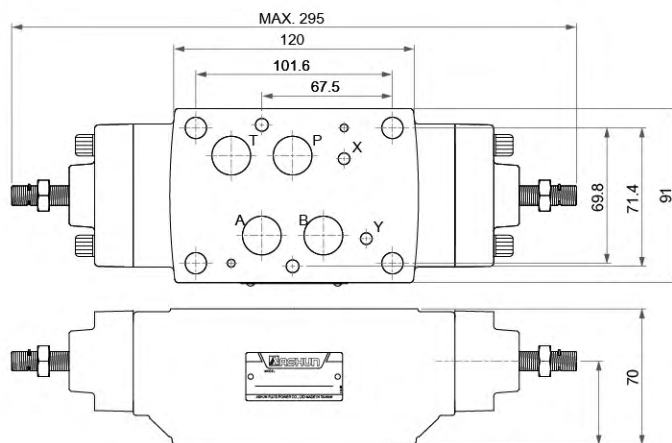

MTCV-04 ※ - X . . . 43
MTCV-04 ※ - Y . . . 27

方向控制閥 Directional Control Valves

電磁換向閥 Solenoid Operated Directional Valves



BOX TYPE



DIN TYPE

■ 選購指南 HOW TO ORDER

AHD	-	G	02	-	3C2	-	AC110V	-	10
系列編號 SERIES NUMBER		接續型式 TYPE OF CONNECTION	閥口徑 VALVE SIZE		迴路種類 SPOOL TYPE		使用電源 POWER SOURCE		接線方式 TYPE OF CONNECTION
AHD		- G : 座墊型 Sub-plated Type	- 02 : 1/4" - 03 : 3/8"		詳見迴路種類表 Refer Spool Type Symbol Table		- AC : AC110V / AC220V - DC : DC12V / DC24V - RF : RF110V / RF220V		- 10 : 接線盒 Box Type - 20 : 插頭式 Din Type

■ 規格說明 SPECIFICATIONS

型式 Model Series	啓流壓力 Cracking Pressur MPa (kgf/cm ²)	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	容許背壓 Back Pressure Allowable MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	切換頻率 Conversion Frequency
AHD-G02	※ 詳見迴路種類表 Refer Spool Type Symbol Table	31.5 (315)	7(70) - 16(160)	60	300 RF120
AHD-G03				120	240 RF120

■ 安裝螺絲 MOUNTING BOLTS

型式 Model Series	安裝螺絲 Mounting Cap Screw
AHD-G02	M 5 X 45 L 4pcs
AHD-G03	M 6 X 35 L 4pcs

電磁換向閥 Solenoid Operated Directional Valves

彈簧偏心 2 位置 SPRING OFFSET 2 POSITION	圖形符號 GRAPHIC SYMBOLS	彈簧偏心 3 位置 SPRING OFFSET 3 POSITION	圖形符號 GRAPHIC SYMBOLS	彈簧偏心 3 位置 SPRING OFFSET 3 POSITION	圖形符號 GRAPHIC SYMBOLS
	標準組立 STANDARD		標準組立 STANDARD		標準組立 STANDARD
2A2		3C2		2D2	
2A3		3C3		2D3	
2A14		3C4		2D4	
2A2L		3C40		2D40	
2A3L		3C5		2D7	
2A14L		3C6		2D2A	
2B2		3C60		2D3A	
2B3		3C7		2D4A	
2B8		3C8		2D40A	
2B29		3C9		2D5A	
2B2L		3C10		2D6A	
2B3L		3C11		2D60A	
2B8L		3C12		2D7A	
2B29L		3C25		2D9A	
		3C29		2D10A	
		3C48		2D11A	
		3C94		2D12A	


電磁換向閥 Solenoid Operated Directional Valves

彈簧偏心 2 位置 SPRING OFFSET 2 POSITION	圖形符號 GRAPHIC SYMBOLS		彈簧偏心 2 位置 SPRING OFFSET 2 POSITION	圖形符號 GRAPHIC SYMBOLS	
	標準組立 STANDARD	反向組立 REVERSED		標準組立 STANDARD	反向組立 REVERSED
2B2A			2B2B		
2B3A			2B3B		
2B4A			2B4B		
2B40A			2B40B		
2B5A			2B5B		
2B6A			2B6B		
2B60A			2B60B		
2B7A			2B7B		
2B8A			2B8B		
2B9A			2B9B		
2B10A			2B10B		
2B11A			2B11B		
2B12A			2B12B		
2B25A			2B25B		
2B29A			2B29B		
2B48A			2B48B		

電磁換向閥 Solenoid Operated Directional Valves


AHD-G02-3C ※-AC※※※-10

AHD-G02-2D ※-AC※※※-10

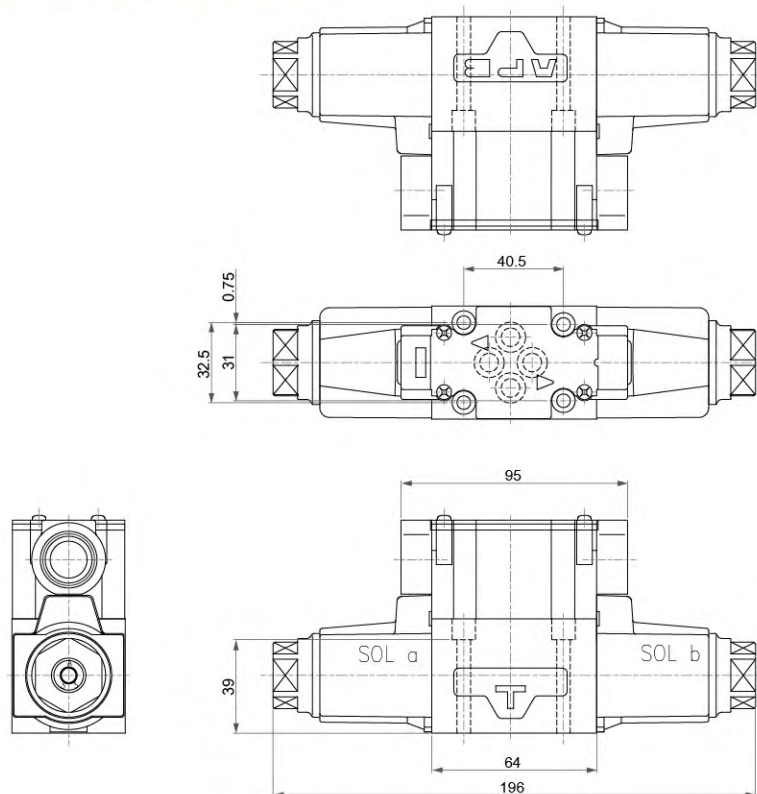


AHD-G02-3C ※-DC※※※-10


AHD-G02-2D ※-DC※※※-10

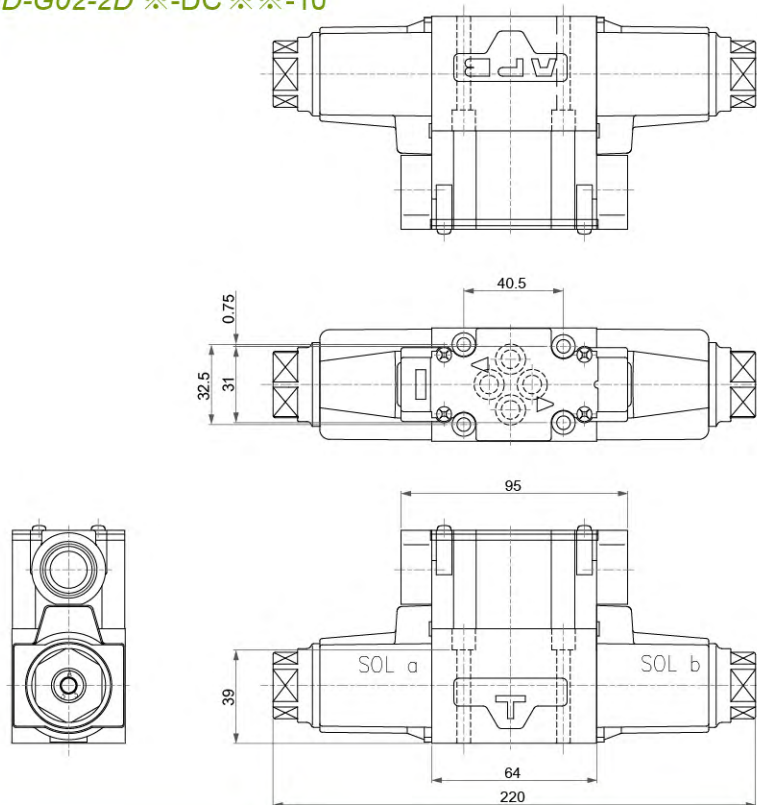


AHD-G02-2B ※-AC※※※-10

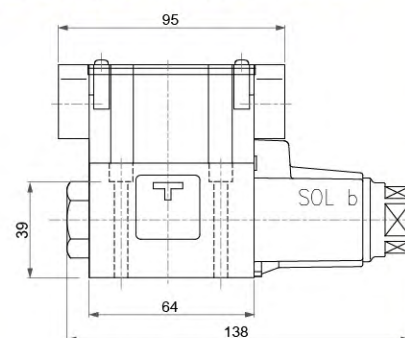


其它尺寸參見左圖
另有電磁線圈在A邊的反組立型



AHD-G02-2B ※-DC※※※-10

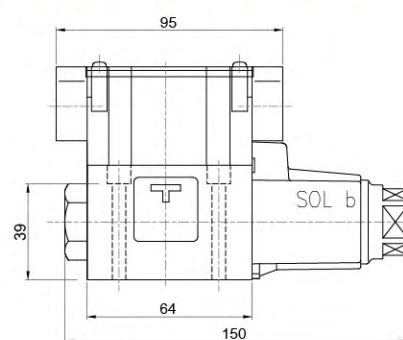


其它尺寸參見左圖
另有電磁線圈在A邊的反組立型




電磁換向閥 Solenoid Operated Directional Valves

AHD-G02-3C ※-AC ※※※-20


AHD-G02-2D ※-AC ※※※-20

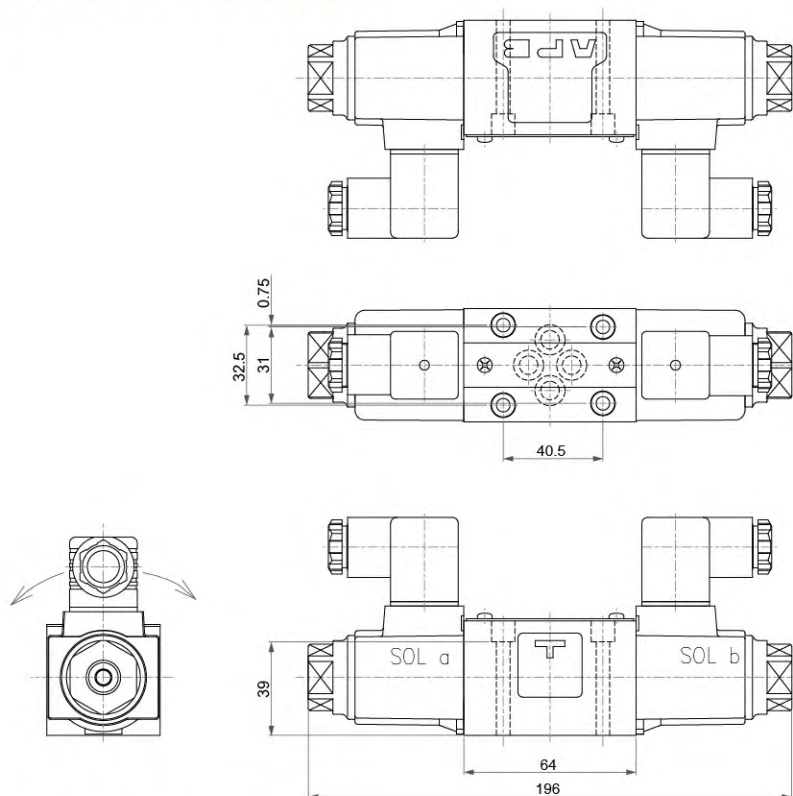

AHD-G02-2B ※-AC ※※※-20

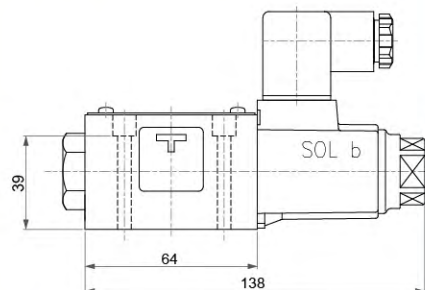


其它尺寸參見左圖
另有電磁線圈在A邊的反組立型




AHD-G02-3C ※-DC ※※※-20


AHD-G02-2D ※-DC ※※※-20

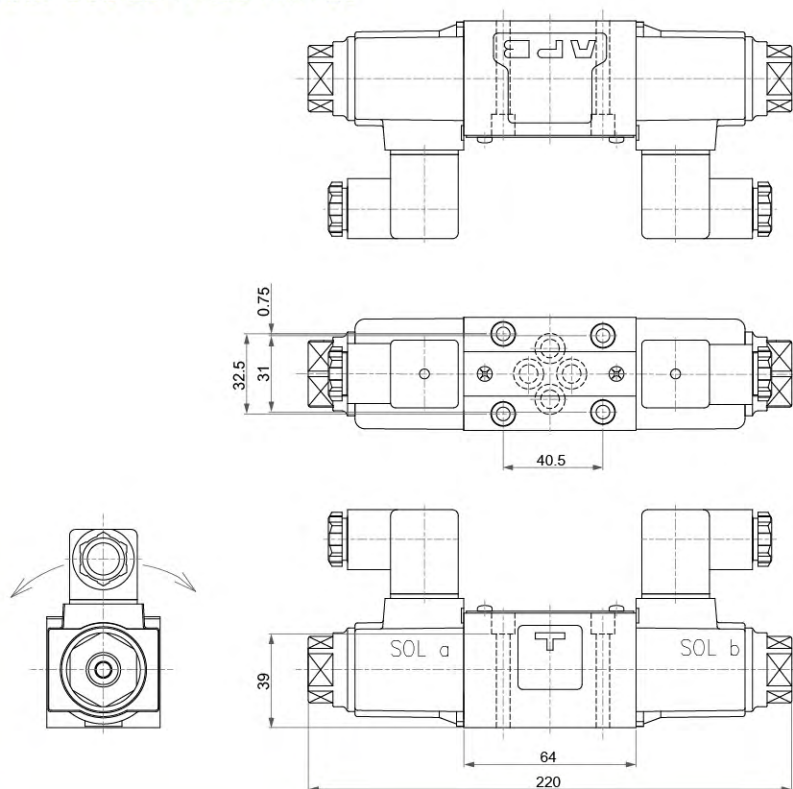

AHD-G02-2B ※-DC ※※※-20

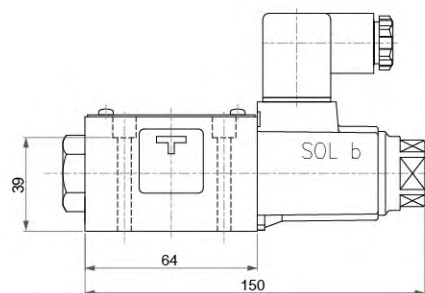


其它尺寸參見左圖
另有電磁線圈在A邊的反組立型




電磁換向閥 Solenoid Operated Directional Valves


AHD-G03-3C ※-AC ※※※-10
AHD-G03-2D ※-AC ※※※-10

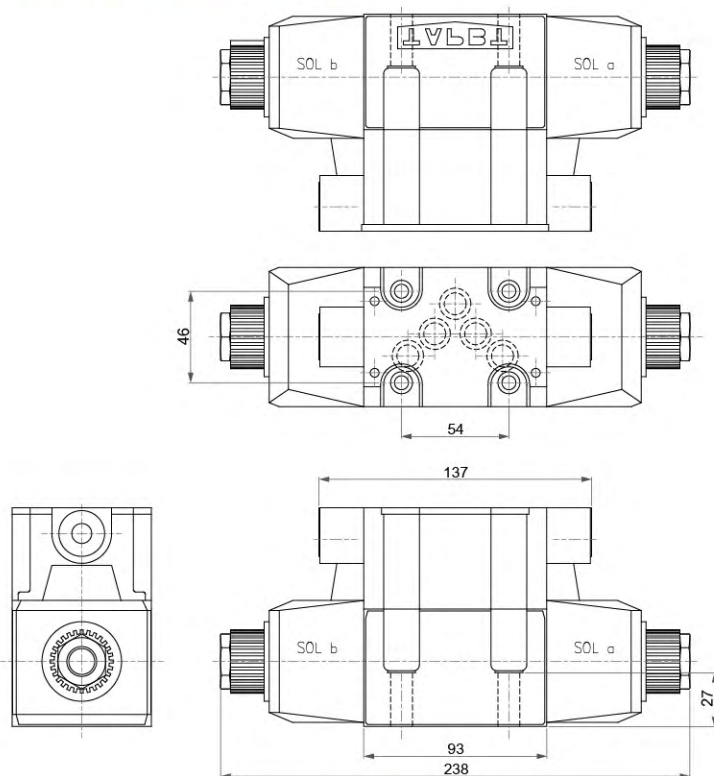


AHD-G03-2B ※-AC ※※※-10

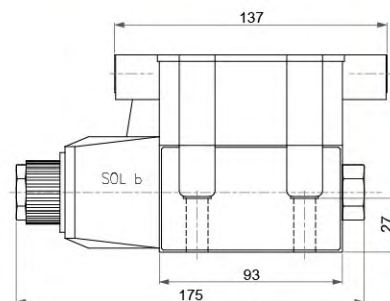


其它尺寸參見左圖
另有電磁線圈在A邊的反組立型




AHD-G03-3C ※-DC ※※※-10
AHD-G03-2D ※-DC ※※※-10

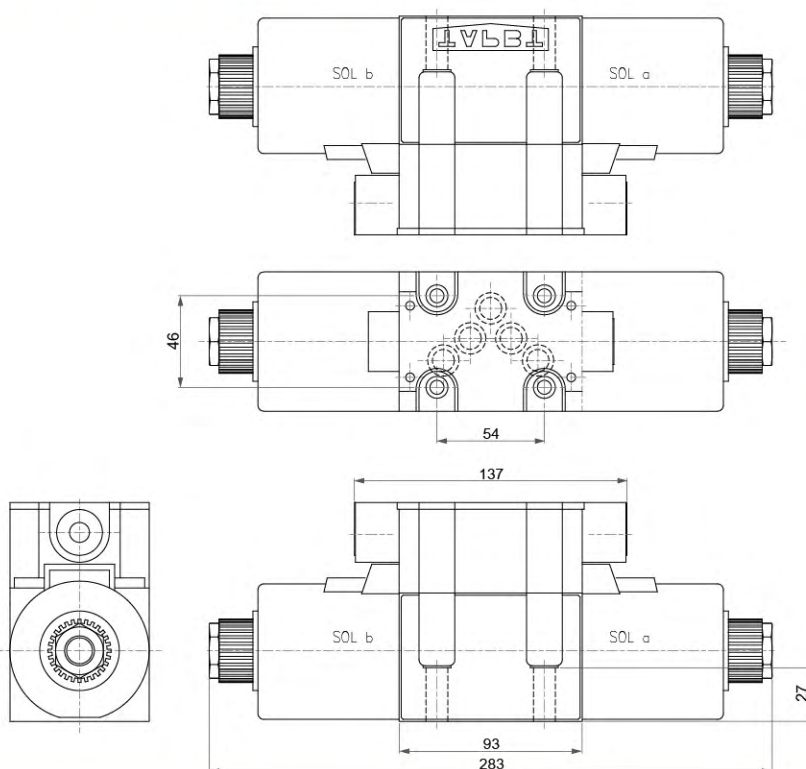

AHD-G03-2B ※-DC ※※※-10

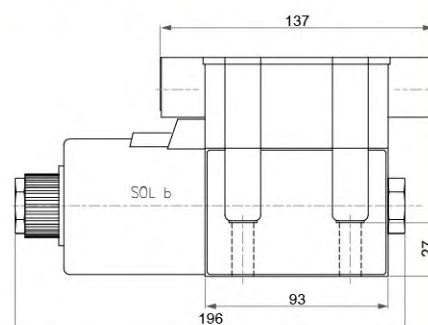


其它尺寸參見左圖
另有電磁線圈在A邊的反組立型




電磁換向閥 Solenoid Operated Directional Valves


AHD-G03-3C ※-AC ※※※-20
AHD-G03-2D ※-AC ※※※-20

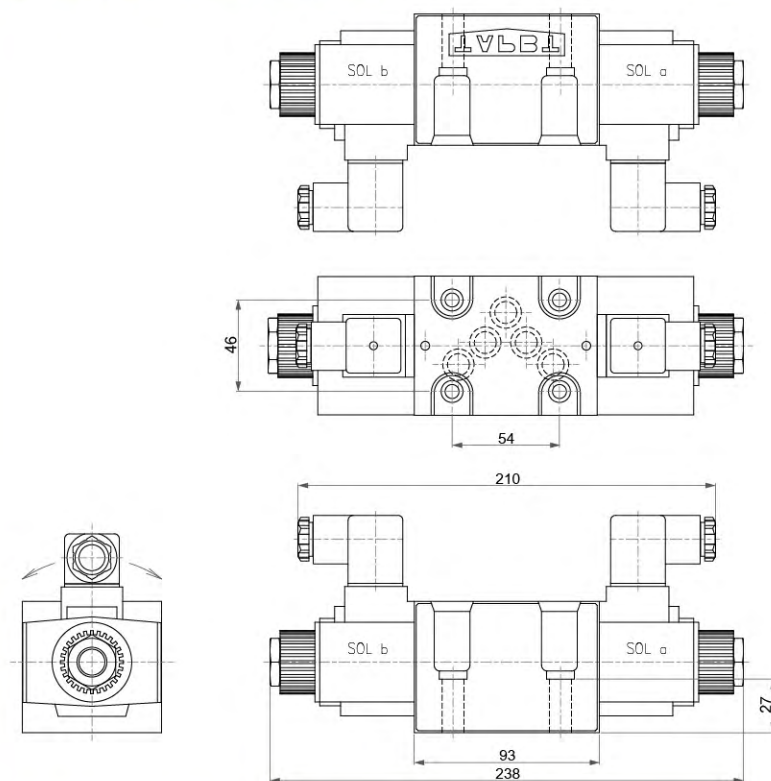


AHD-G03-2B ※-AC ※※※-20

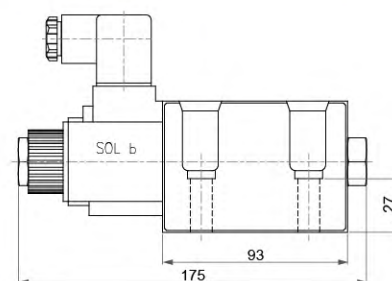


其它尺寸參見左圖
另有電磁線圈在A邊的反組立型




AHD-G03-3C ※-DC ※※※-20
AHD-G03-2D ※-DC ※※※-20

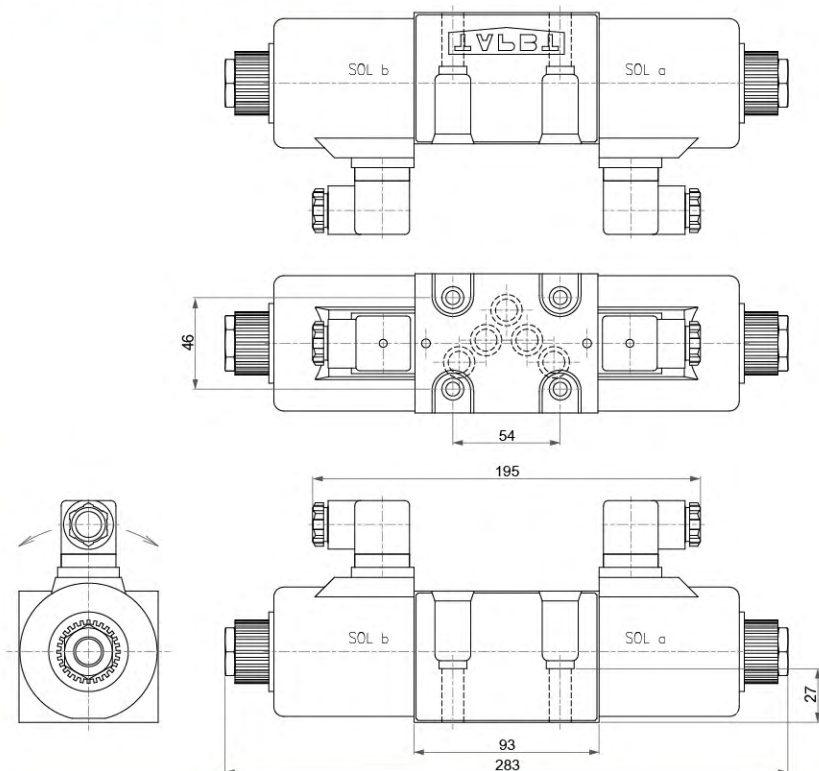


AHD-G03-2B ※-DC ※※※-20

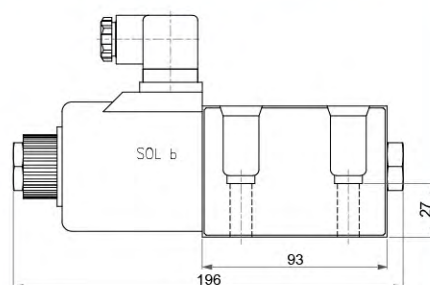

其它尺寸參見左圖
另有電磁線圈在A邊的反組立型



單向閥 Check Valves



■ 選購指南 HOW TO ORDER

CV	- 03	G	- 05	- 10
系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	接續型式 TYPE OF CONNECTION	啓流壓力 CRACKING PRESSURE MPa (kgf/cm ²)	設計號 DESIGN NUMBER
CV	- 03 : 3/8"	G : 座墊型 Sub-plated Type T : 配管型 Thread Type	- 05 : 0.05 (0.5) - 50 : 0.5 (5)	- 10 (標準型) Standard Type
	- 04 : 1/2"	T : 配管型 Thread Type		
	- 06 : 3/4"	G : 座墊型 Sub-plated Type T : 配管型 Thread Type		
	- 08 : 1"	T : 管式 Thread Type		
	- 10 : 1-1/4"	G : 座墊型 Sub-plated Type T : 配管型 Thread Type		
	- 12 : 1-1/2"	T : 配管型 Thread Type		

■ 規格說明 SPECIFICATIONS


型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)	
CV-03(G/T)	25 (250)	40	1.7	0.2
CV-04T		60	0.4	
CV-06(G/T)		100	4.2	0.7
CV-08T		180	1	
CV-10(G/T)		350	7.8	2.1
CV-12T		600	3.2	

■ 安裝螺絲 MOUNTING BOLTS

型式 Model Series	安裝螺絲 Mounting Cap Screw
CV-03G	M 10 X 45 L 4pcs
CV-06G	M 16 X 45 L 4pcs
CV-10G	M 20 X 45 L 4pcs

單向閥 Check Valves

• CV-(03/06/10)G

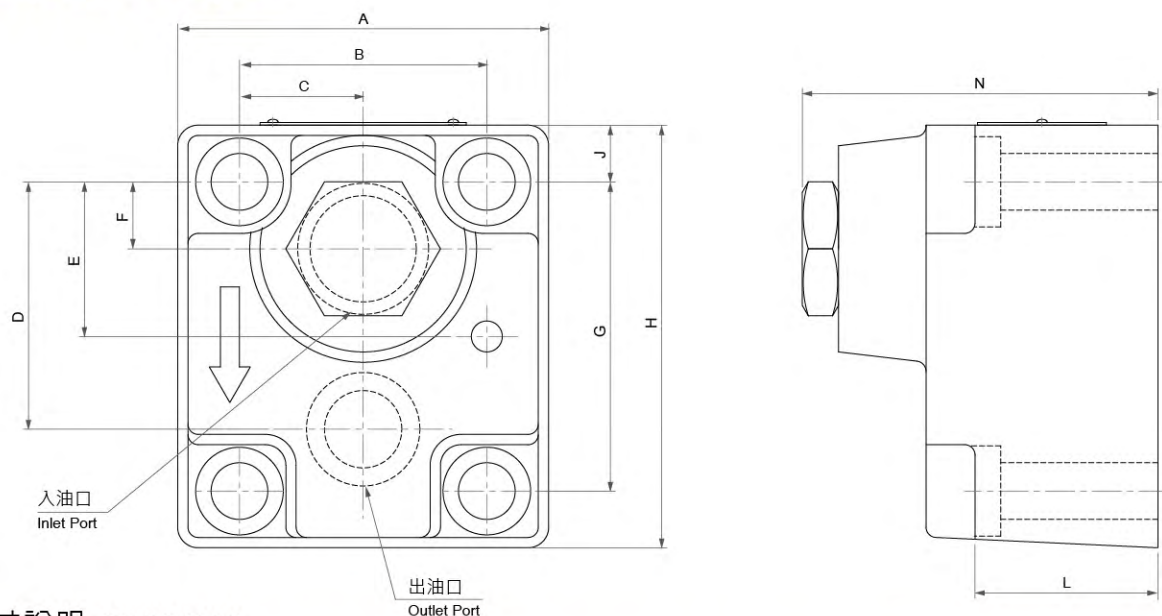


■ 尺寸說明 DIMENSION

型式 Model Series	A	B	C	D	E	F	G	H	J	L	N
CV-03G	60	40	20	10	80	60	30	10	45	100	65
CV-06G	80	58	29	11	92	70	35	11	54	117.5	73
CV-10G	100	72	36	14	120	92	46	14	71	145	100

• CV-(03/04/06/08)T

■ 尺寸說明 DIMENSION


型式 Model Series	A	B	C
CV-03T	70	26	3/8"
CV-04T	82	29	1/2"
CV-06T	91.5	44.5	3/4"
CV-08T	112	51	1"

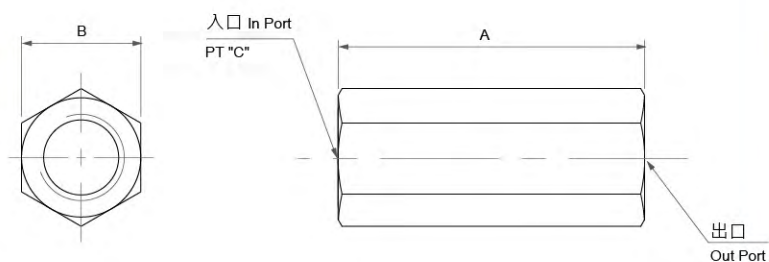


• CV-(10/12)T

■ 尺寸說明 DIMENSION

型式 Model Series	A	B	C
CV-10T	132	58	1-1/4"
CV-12T	140	64	1-1/2"

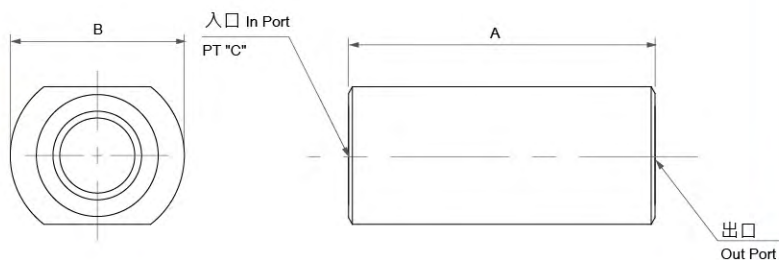

預充閥(滿油閥) Prefill Valves (Surge Valves)

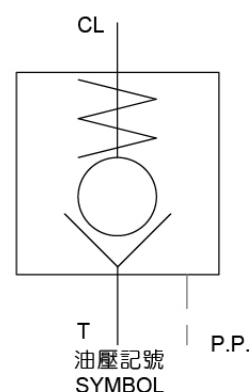

■ 選購指南 HOW TO ORDER


SG	-	16	-	R	-	10
系列編號 SERIES NUMBER		閥口徑 VALVE SIZE		安裝型式 TYPE OF CONNECTION		設計號 DESIGN NUMBER
SG		- 16 : 2"		- L (直線型) 180° Angle Type		- 10 (標準型) Standard Type
		- 24 : 3"		- R (直角型) 90° Angle Type		
		- 32 : 4"		- L (直線型) 180° Angle Type		

■ 規格說明 SPECIFICATIONS


型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	啓流壓力 Cracking Pressure MPa (kgf/cm ²)	定格流量 Rated Flow (L/min)		重量 Weight (kg)
			真空自吸 Vacuumed Suction	PL使用時 Using PL	
SG-16-(L)	21 (210)	0.012 (0.12)	260	400	31.2
SG-24-(R/L)		0.014 (0.14)	600	900	55
SG-32-(R/L)		0.016 (0.16)	1100	1600	100

預充閥(滿油閥) Prefill Valves (Surge Valves)

● SG-16

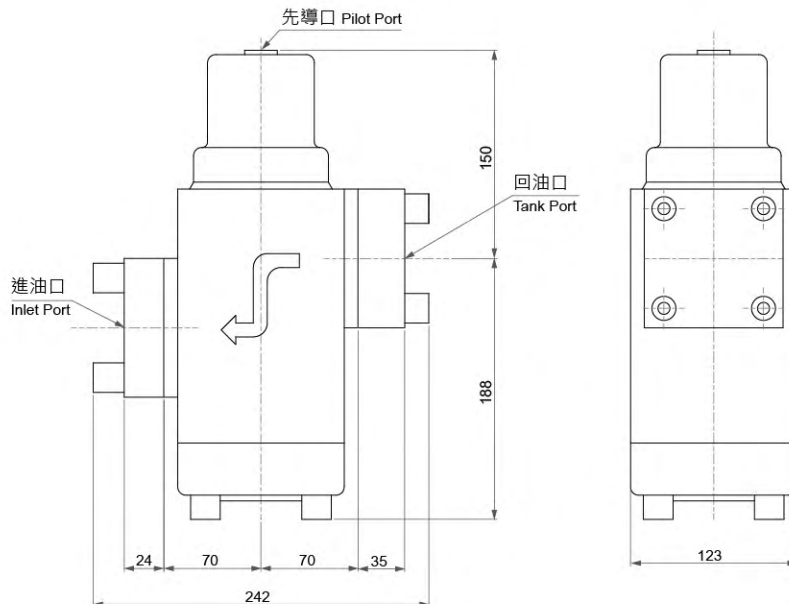


● SG-24/32

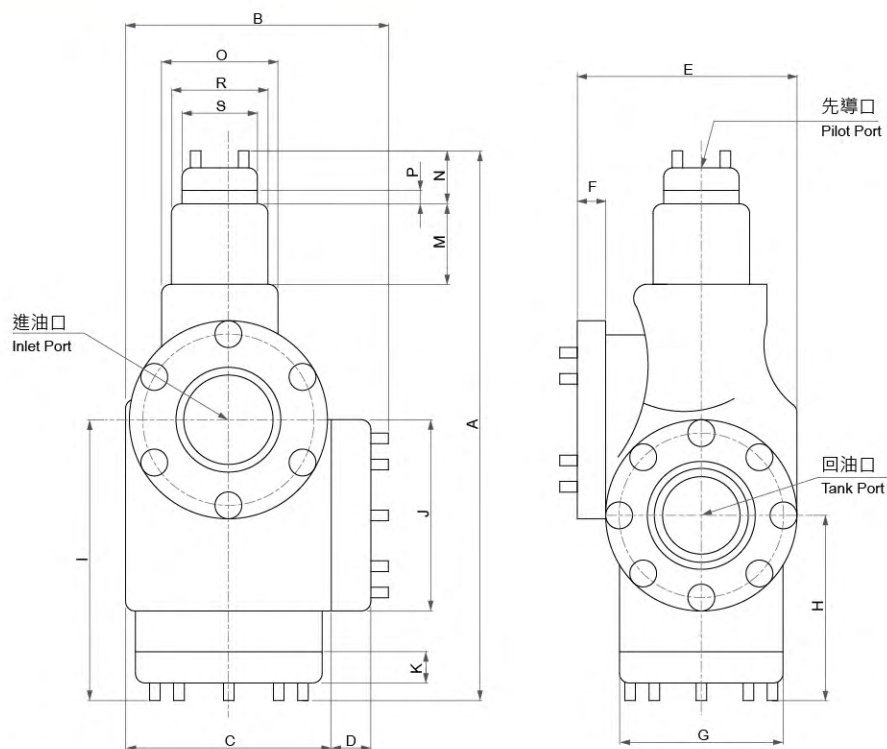

■ 尺寸說明 DIMENSION

型式 Model Series	A	B	C	D	E	F	G	H	I	J	K	M	N	O	P	R	S
SG-24	402	260	200	42	230	30	155	160	235	140	40	96	-	-	-	67	3/8PT
SG-32	560	286	220	45	265	31	203	210	330	203	52	112	35	10	25	85	65

液控單向閥 Pilot Operated Check Valves




■ 選購指南 HOW TO ORDER

CPTS	-	03	-	50	-	10
系列編號 SERIES NUMBER		閥口徑 VALVE SIZE		啓流壓力 CRACKING PRESSURE MPa (kgf/cm ²)		設計號 DESIGN NUMBER
CPTS		- 03 : 3/8"		- 50 : 0.5 (5)		- 10 (標準型) Standard Type


■ 規格說明 SPECIFICATIONS

型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
CPTS-03	21 (210)	50	0.7

● CPTS-03

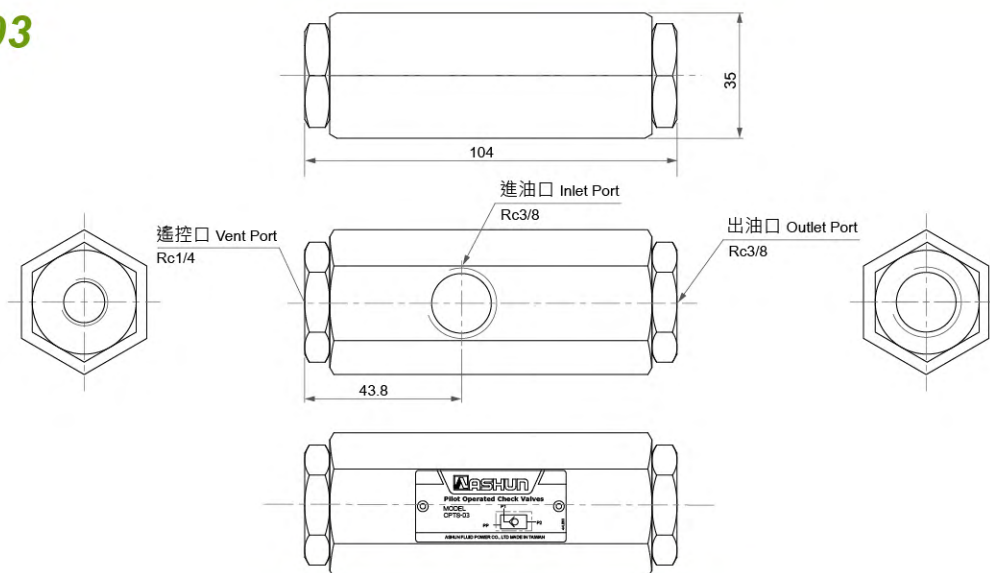

釋壓型液控單向閥 Decompressing Pilot Operated Check Valves

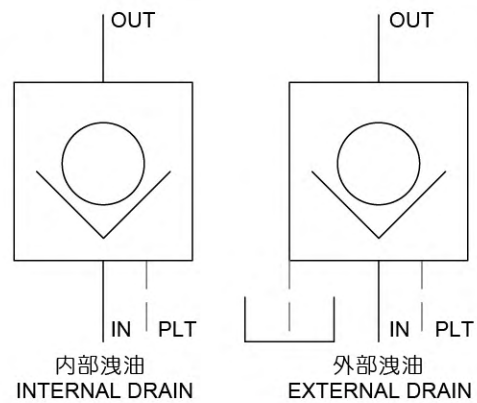

■選購指南 HOW TO ORDER

PCDV - 03 G - 05 - D - 10					
系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	接續型式 TYPE OF CONNECTION	啓流壓力 CRACKING PRESSURE MPa (kgf/cm ²)	洩油方式 DRAIN TYPE	設計號 DESIGN NUMBER
PCDV	- 03 : 3/8"	G : 座墊型 Sub-plated Type	- 05 : 0.05 (0.5) - 50 : 0.5 (5)	- D : 外部洩油 External Drain - NONE : 內部洩油 Internal Drain	- 10 (標準型) Standard Type
	- 04 : 1/2"	T : 配管型 Thread Type			
	- 06 : 3/4"	G : 座墊型 Sub-plated Type T : 配管型 Thread Type			
	- 10 : 1-1/4"	G : 座墊型 Sub-plated Type T : 配管型 Thread Type			

■規格說明 SPECIFICATIONS


型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)	
PCDV-03G	21 (210)	75	4.4	
PCDV-04T		80	3	
PCDV-06(G/T)		125	7	6.3
PCDV-10(G/T)		320	11	12

■安裝螺絲 MOUNTING BOLTS

型式 Model Series	安裝螺絲 Mounting Cap Screw
PCDV-03G	M 10 X 45 L 4pcs
PCDV-06G	M 10 X 65 L 4pcs
PCDV-10G	M 10 X 80 L 4pcs

釋壓型液控單向閥 Decompressing Pilot Operated Check Valves


● PCDV-(03/06)-G

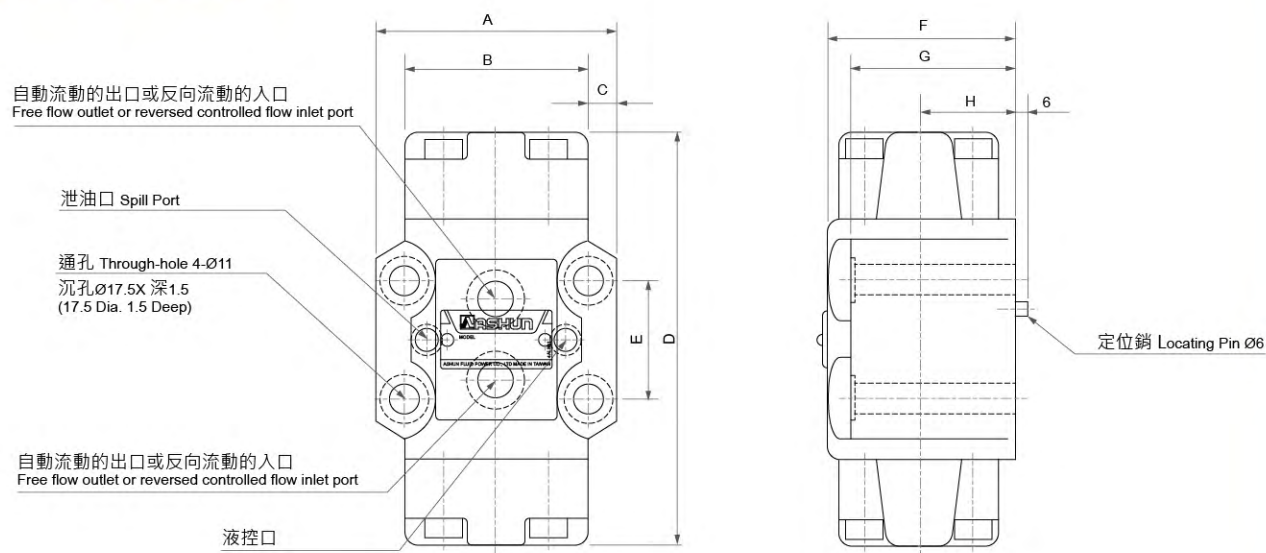

■ 尺寸說明 DIMENSION


型式 Model Series	A	B	C	D	E	F	G	H
PCDV-03G	88	66.7	11.1	148	42.9	65	39	38
PCDV-06G	103	79.4	11.3	152	60.3	80	69	40

● PCDV-10G

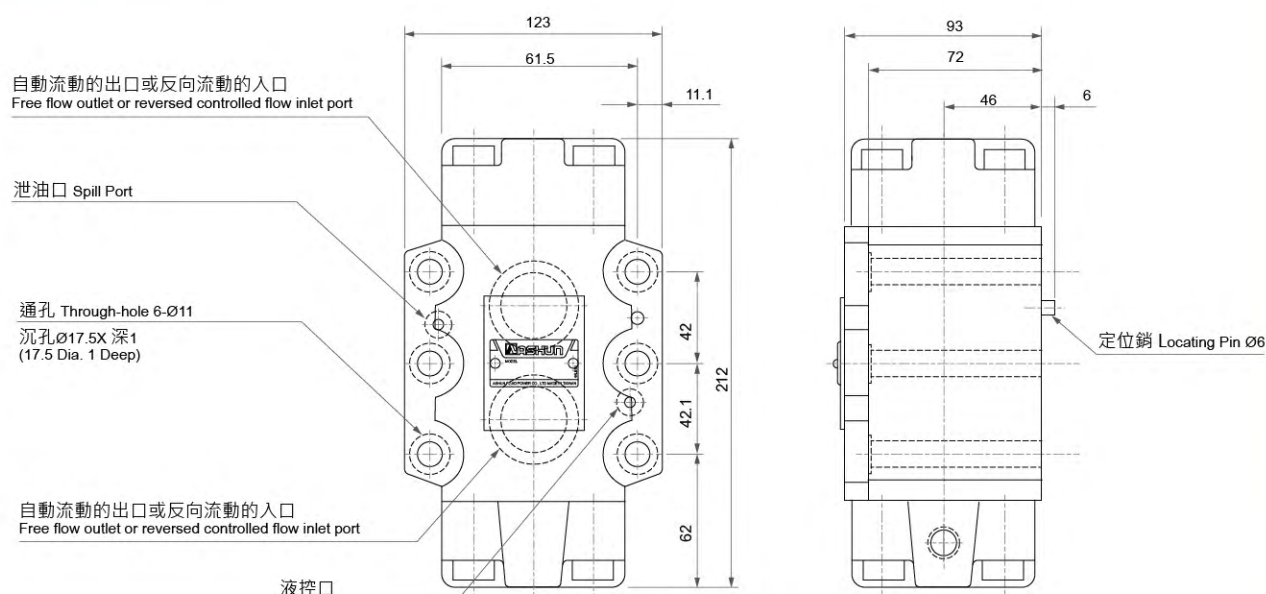

釋壓型液控單向閥 Decompressing Pilot Operated Check Valves


● PCDV-(04/06/10)-T

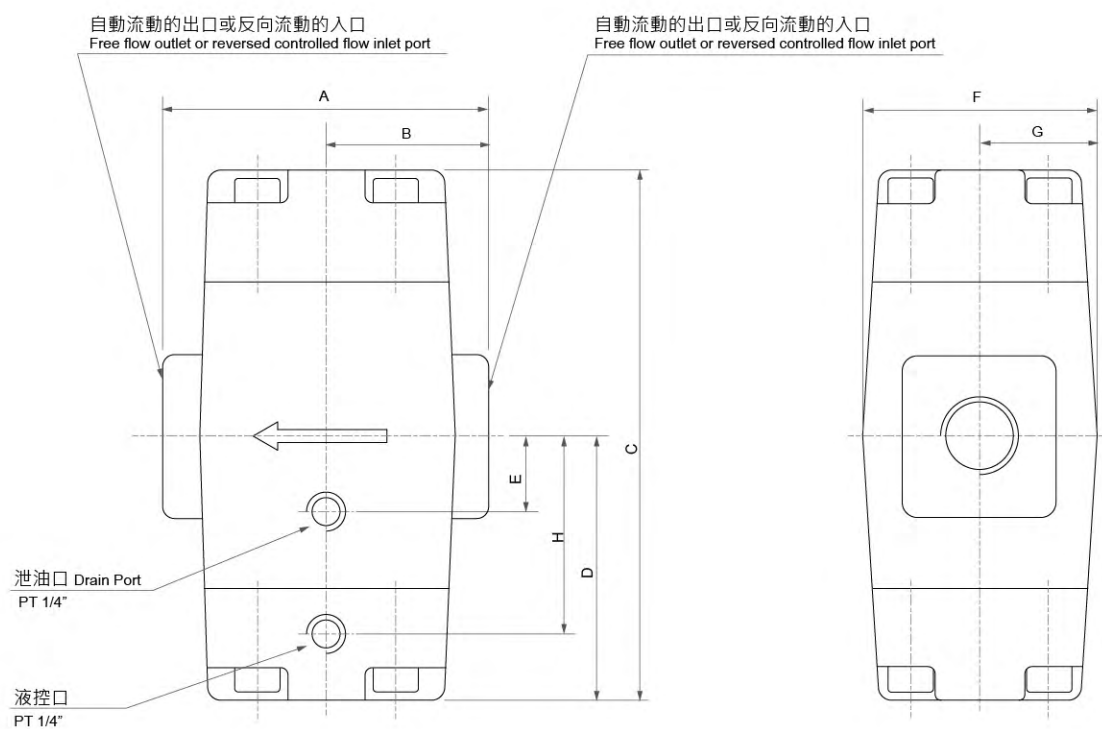

■ 尺寸說明 DIMENSION

型式 Model Series	A	B	C	D	E	F	G	H
PCDV-04-T	80	40	126	63	21	68	35.5	58
PCDV-06-T	95	47.5	175	87.5	26	80	38	70
PCDV-10-T	140	70	212	106	35	92	45	84

液控單向閥 Pilot Operated Check Valves

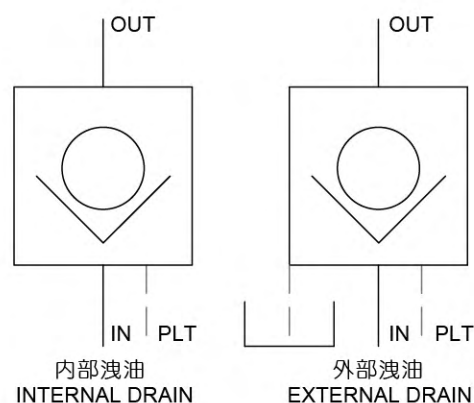

選購指南 HOW TO ORDER

PCV	- 03	G	- 05	- D	- 10
系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	接續型式 TYPE OF CONNECTION	啓流壓力 CRACKING PRESSURE MPa (kgf/cm ²)	洩油方式 DRAIN TYPE	設計號 DESIGN NUMBER
PCV	- 03 : 3/8"	G : 座墊型 Sub-plated Type T : 配管型 Thread Type	- 05 : 0.05 (0.5) - 50 : 0.5 (5)	- D : 外部洩油 External Drain - NONE : 內部洩油 Internal Drain	- 10 (標準型) Standard Type
	- 04 : 1/2"	T : 配管型 Thread Type			

規格說明 SPECIFICATIONS


型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
PCV-03G	21 (210)	75	4.2
PCV-03T		75	3.9
PCV-04T		80	3.7

安裝螺絲 MOUNTING BOLTS


型式 Model Series	安裝螺絲 Mounting Cap Screw
PCV-03G	M 10 X 55 L 4pcs

液控單向閥 Pilot Operated Check Valves


● PCV-03G

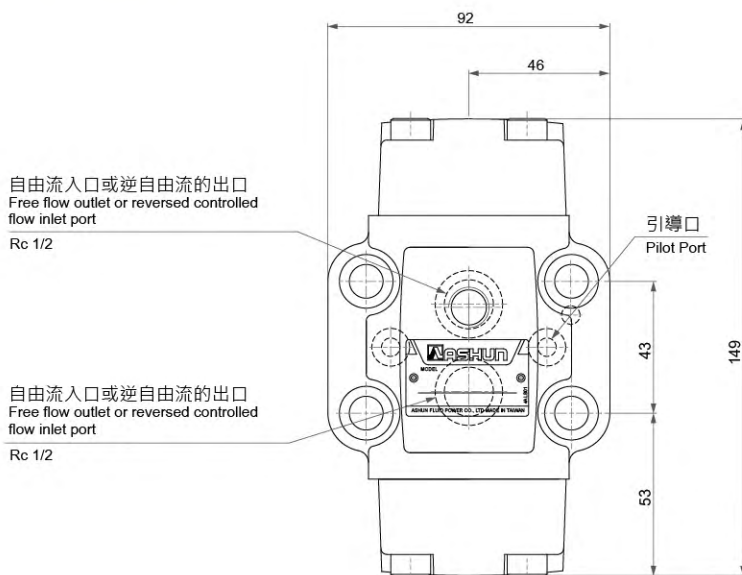

● PCV-(03/04)T

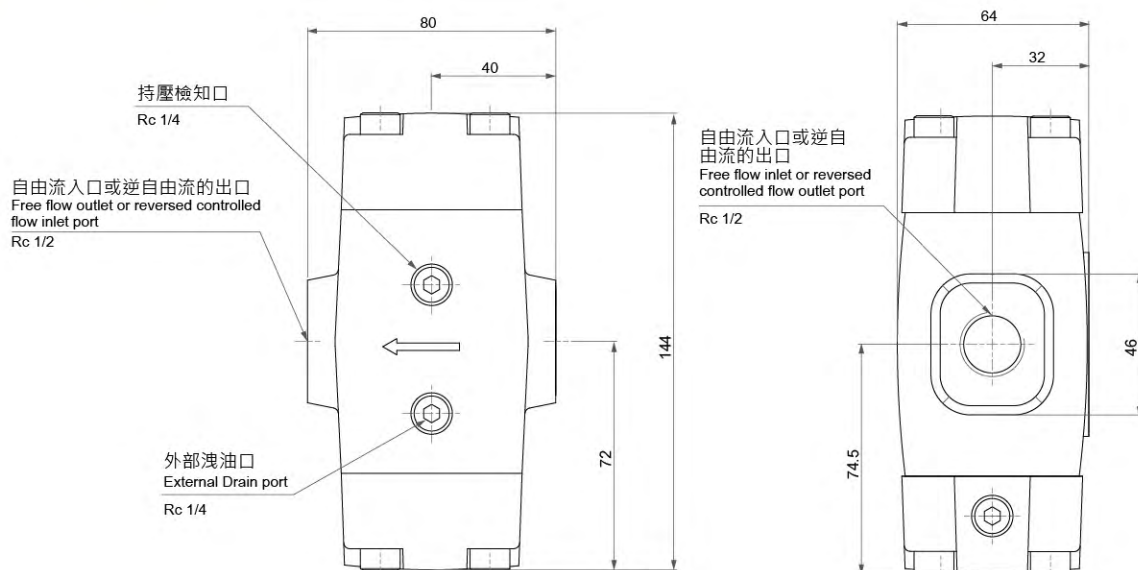

手動換向閥 Manually Operated Directional Valves

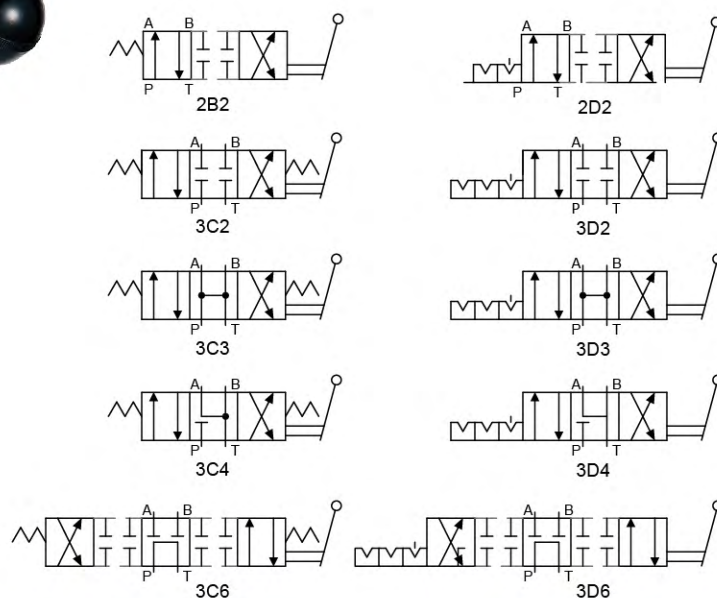

彈簧式 SPRING CENTRED

珠子式 NO-SPRING DETENTED

選購指南 HOW TO ORDER

DM	G	- 02 -	3C2	- 10
系列編號 SERIES NUMBER	接續型式 TYPE OF CONNECTION	閥口徑 VALVE SIZE	閥芯 SPOOL	設計號 DESIGN NUMBER
DM	G (座墊式) Sub-plated Type	- 02 : 1/4" - 03 : 3/8"	- 3C2、3D2 3C4、3D4 3C6、3D6 3C60、3D60等 (詳見迴路種類圖) See Circuit Diagram Types	- 10 (標準型) Standard Type


規格說明 SPECIFICATIONS

型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	容許背壓 Back Pressure Allowable MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
DMG-02	21 (210)	10 (100)	35	2
DMG-03			50	3.7

手動換向閥 Manually Operated Directional Valves


• DMG-02

安裝尺寸符合ISO4401-AB-03-4-A
Mounting Surface:ISO4401-AB-03-4-A

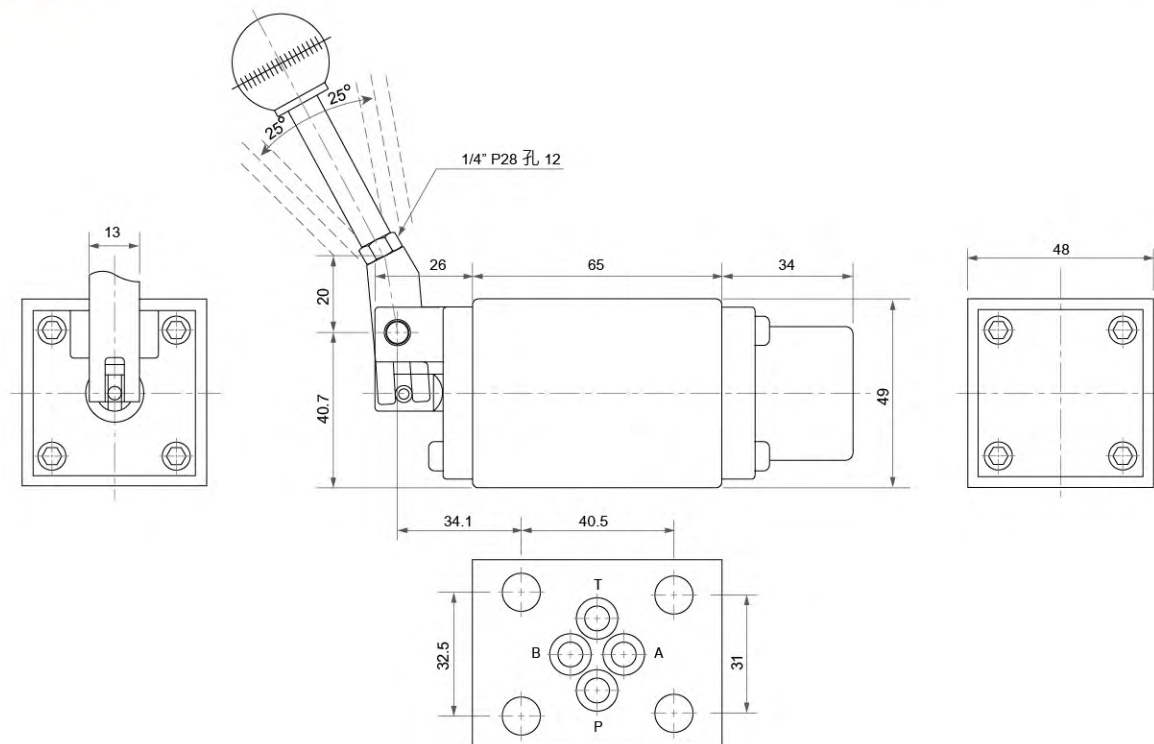


• DMG-03

安裝尺寸符合ISO4401-AC-05-4-A
Mounting Surface:ISO4401-AC-05-4-A

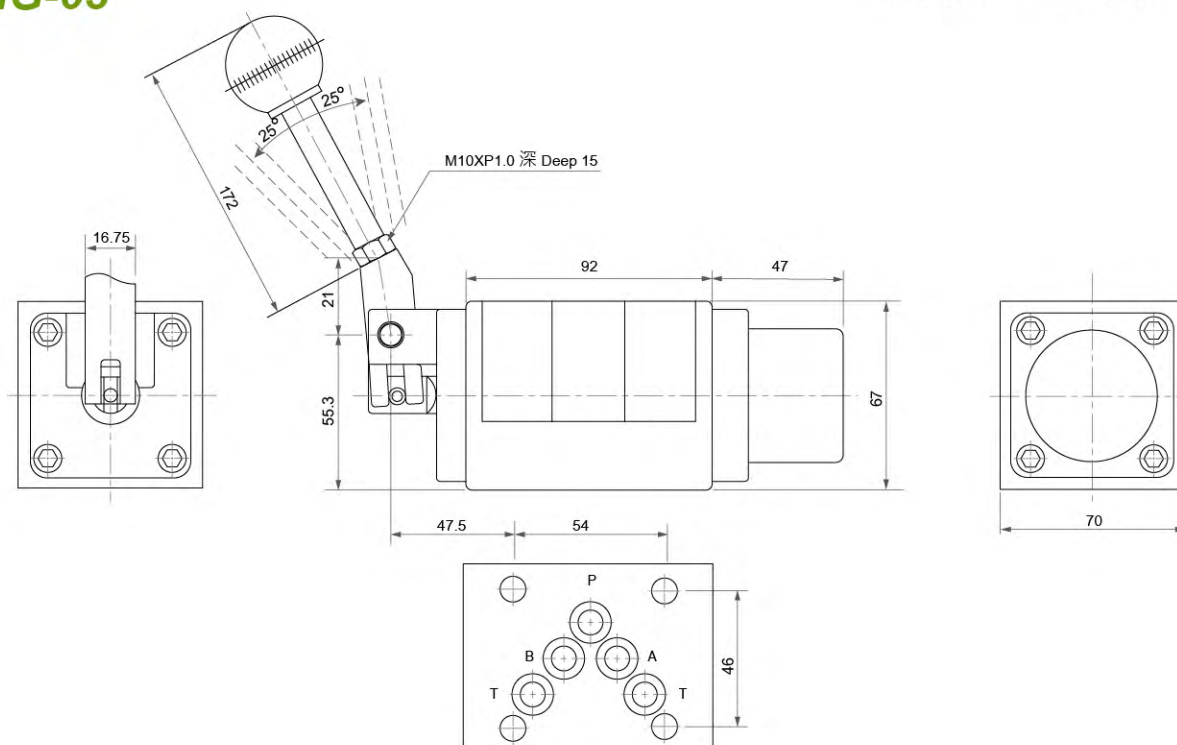

手動換向閥 Manually Operated Directional Valves

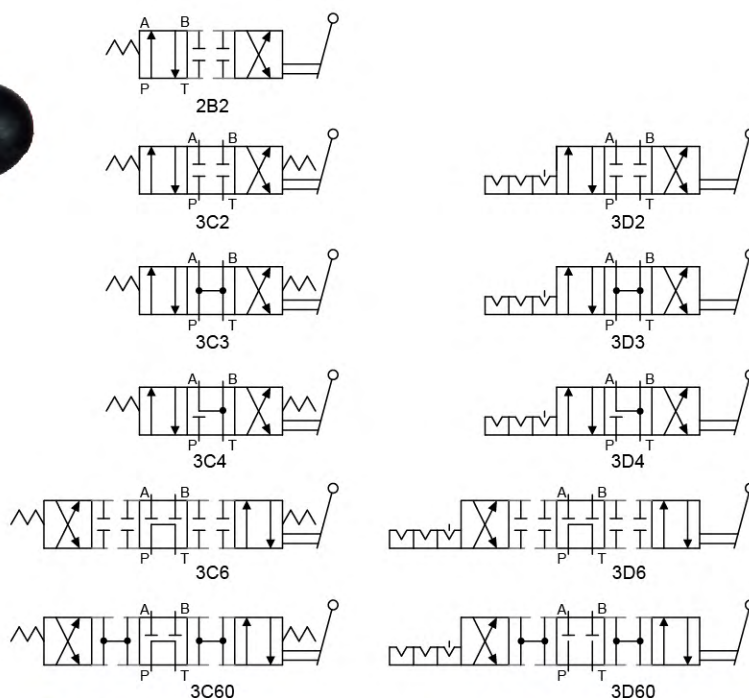

彈簧式 SPRING CENTRED

珠子式 NO-SPRING DETENTED

■ 選購指南 HOW TO ORDER


系列編號 SERIES NUMBER	接續型式 TYPE OF CONNECTION	閥口徑 VALVE SIZE	閥芯 SPOOL	設計號 DESIGN NUMBER
DM	T (配管式) Thread Type	- 03 : 3/8"	- 3C2、3D2 3C4、3D4 3C6、3D6 3C60、3D60等 (詳見迴路種類圖) See Circuit Diagram Types	- 10 (標準型) Standard Type
		- 04 : 1/2"		
		- 06 : 3/4"		
		- 10 : 1-1/4"		

■ 規格說明 SPECIFICATIONS

型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	容許背壓 Back Pressure Allowable MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
DMT-03	21 (210)	14 (140)	75	5
DMT-04			100	8
DMT-06			180	13
DMT-10			300	22

手動換向閥 Manually Operated Directional Valves


● DMT-03/04/06/10

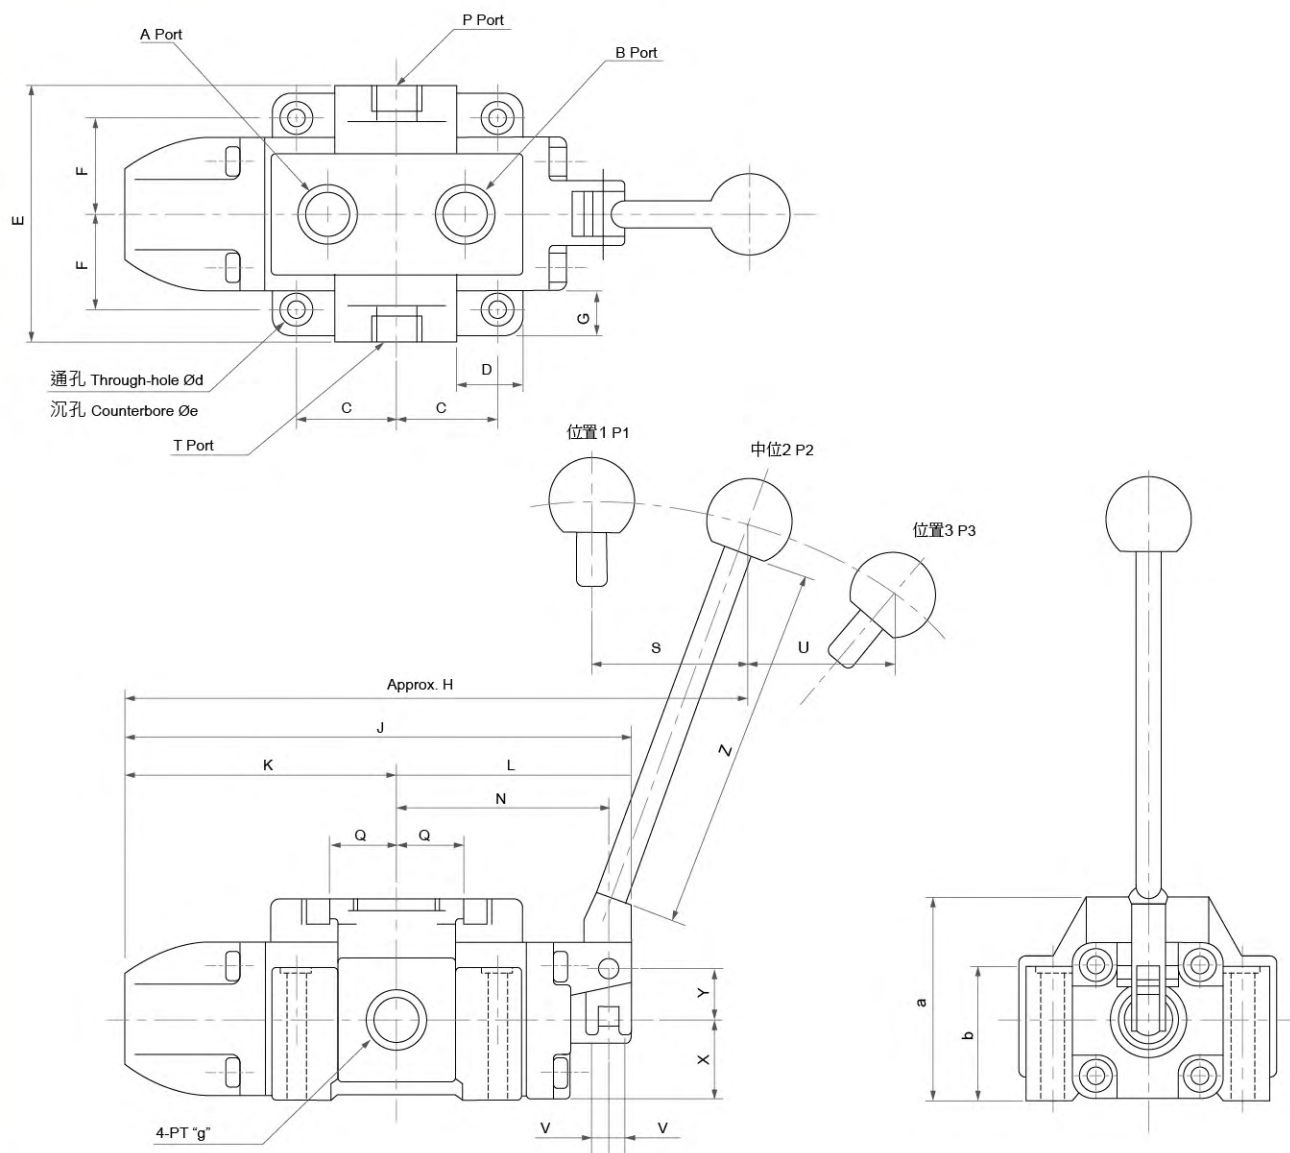

■ 尺寸說明 DIMENSION

型式 Model Series	C	D	E	F	G	H	J	K	L	N	Q	S	U	V	X	Y	Z	a	b	d	e	g(PT)
DMT-03	29	18	76	25	10	246	176	94	82	73.5	23	46	42	5	41	22	200	84.5	74	7	11	3/8
DMT-04	40.5	33	106	42	18	280	206	110	96	84	25	75	60	10	37	19	240	90	55	7	11	1/2
DMT-06	50	30	128	47.5	20	320	257	138	119	108	33.5	86	76	9	40	35	250	100	67	11	17.5	3/4
DMT-10	67	40	164	62.5	33	402	331	177.3	147	136.5	40	102	90	12.5	50	35	270	124	82	13.5	21	1 1/4

轉閥型換向閥 Rotary Type Directional Valves

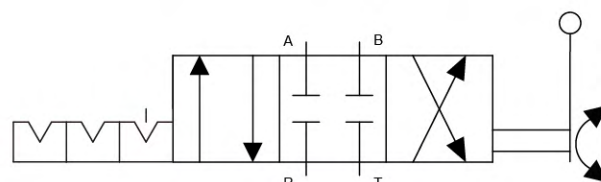

DRT-03-3D2

珠子式 NO-SPRING DETENTED

■ 選購指南 HOW TO ORDER

DRT		-	03	-	3D2	-	10
系列編號 SERIES NUMBER		閥口徑 VALVE SIZE		閥芯 SPOOL		設計號 DESIGN NUMBER	
DRT		- 03 : 3/8"		- 3 D 2 閥芯種類 Spool Type 閥芯彈簧佈置 Spool-Spring Arrangement D: 珠子式 No-Spring Detented 位置數 Position Number 3: 三位置 3 Position		- 10 (標準型) Standard Type	




■ 規格說明 SPECIFICATIONS

型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	容許背壓 Back Pressure Allowable MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
DRT-03-3D2	7 (70)	2 (20)	50	3.4


轉閥型換向閥 Rotary Type Directional Valves

• DRT-03-3D2

2-Ø11孔
沉孔Ø17.5深3.5
(17.5 Dia. 3.5 Deep)

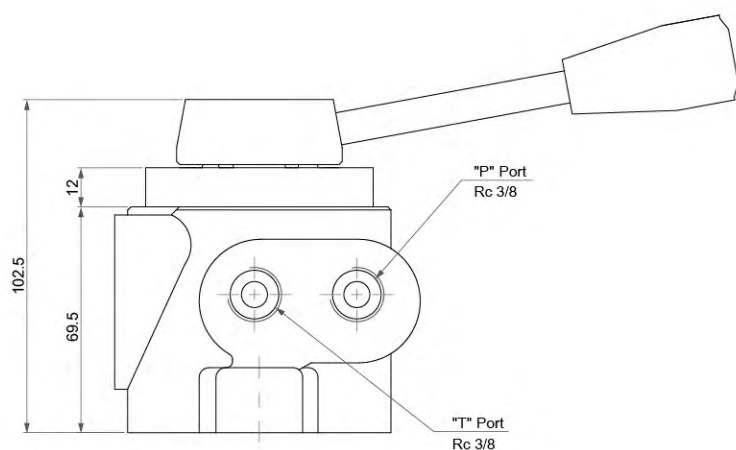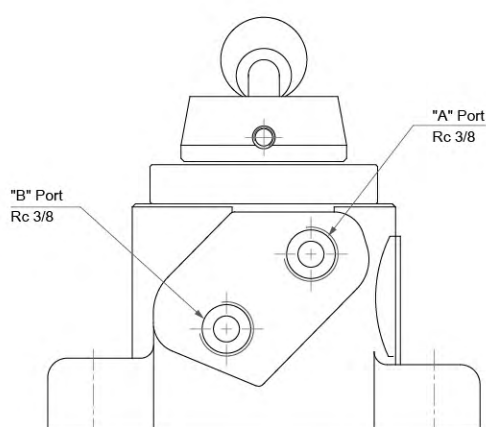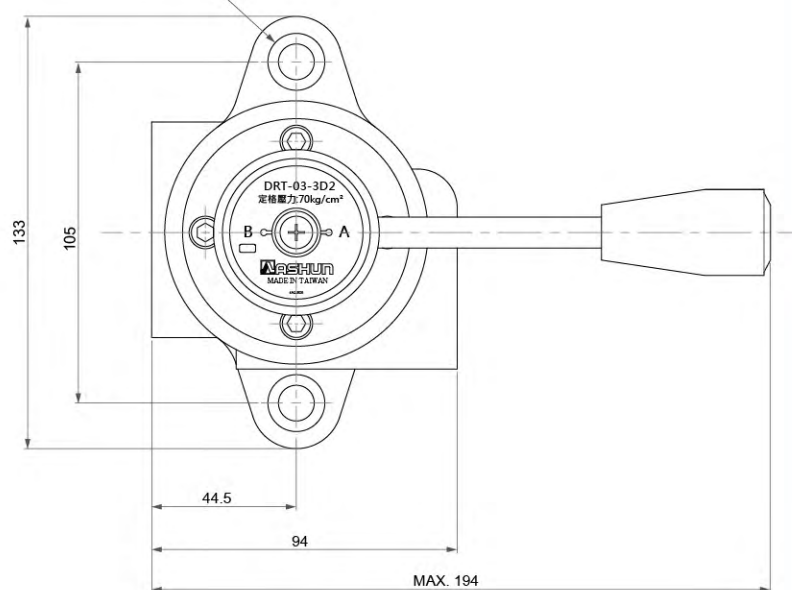

液控換向閥 Pilot Operated Directional Valves

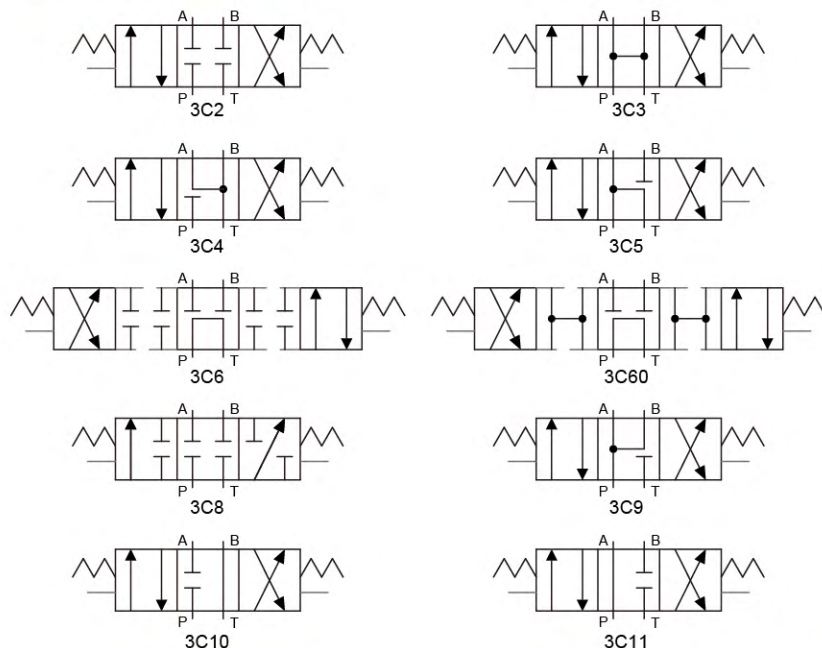

■ 選購指南 HOW TO ORDER

系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	閥芯 SPOOL	導壓方式 PILOT TYPE	洩油方式 DRAIN TYPE	設計號 DESIGN NUMBER
DS	- 04G : 1/2" (座墊式) Sub-plated Type	- 3※2 、 3※4 、 3※6 、 3※60 ……等 (詳見迴路種類圖) See Circuit Diagram Types	- P : 外部導壓 External Pilot - NONE : 內部導壓 Internal Pilot	- D : 外部洩油 External Drain - NONE : 內部洩油 Internal Drain	- 10 (標準型) Standard Type
	- 06G : 3/4" (座墊式) Sub-plated Type	3 C 2 閥芯種類 Spool Type 閥芯彈簧佈置 Spool-Spring Arrangement B/C : 彈簧式 Spring Centred D : 珠子式 No-Spring Detented			
	- 10G : 1-1/4" (座墊式) Sub-plated Type	位置數 Position Number 2 : 二位 2 Position 3 : 三位 3 Position			

■ 規格說明 SPECIFICATIONS

型式 Model Series	最大流量 Max. Flow (L/min)	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最高引導壓力 Max. Pilot Pressure MPa (kgf/cm ²)	最低引導壓力 Min. Pilot Pressure MPa (kgf/cm ²)	T孔最高背壓 Max. T-Line Back Pressure Mpa (kgf/cm ²)		最高換向頻率 Max. Change Over Frequency (cycles/min)	重量 Weight (kg)
					外部洩油 EXT. Drain	內部洩油 INT. Drain		
DS-04G	300	31.5 (315)	25 (250)	0.8 (8)	21 (210)	14 (140)	120	6
DS-06G	500			0.8 (8)				12
DS-10G	1100			1 (10)				49.5


■ 安裝螺絲 MOUNTING BOLTS

型式 Model Series	安裝螺絲 Mounting Cap Screw
DS-04G	M 6 X 45 L 2pcs / M 10 X 45 L 2pcs
DS-06G	M 12 X 45 L 6pcs
DS-10G	M 20 X 75 L 6pcs

液控換向閥 Pilot Operated Directional Valves


● 內控內洩型 : DS-04G- ※※※

內部導壓-內部洩油
Internal Pilot - Internal Drain

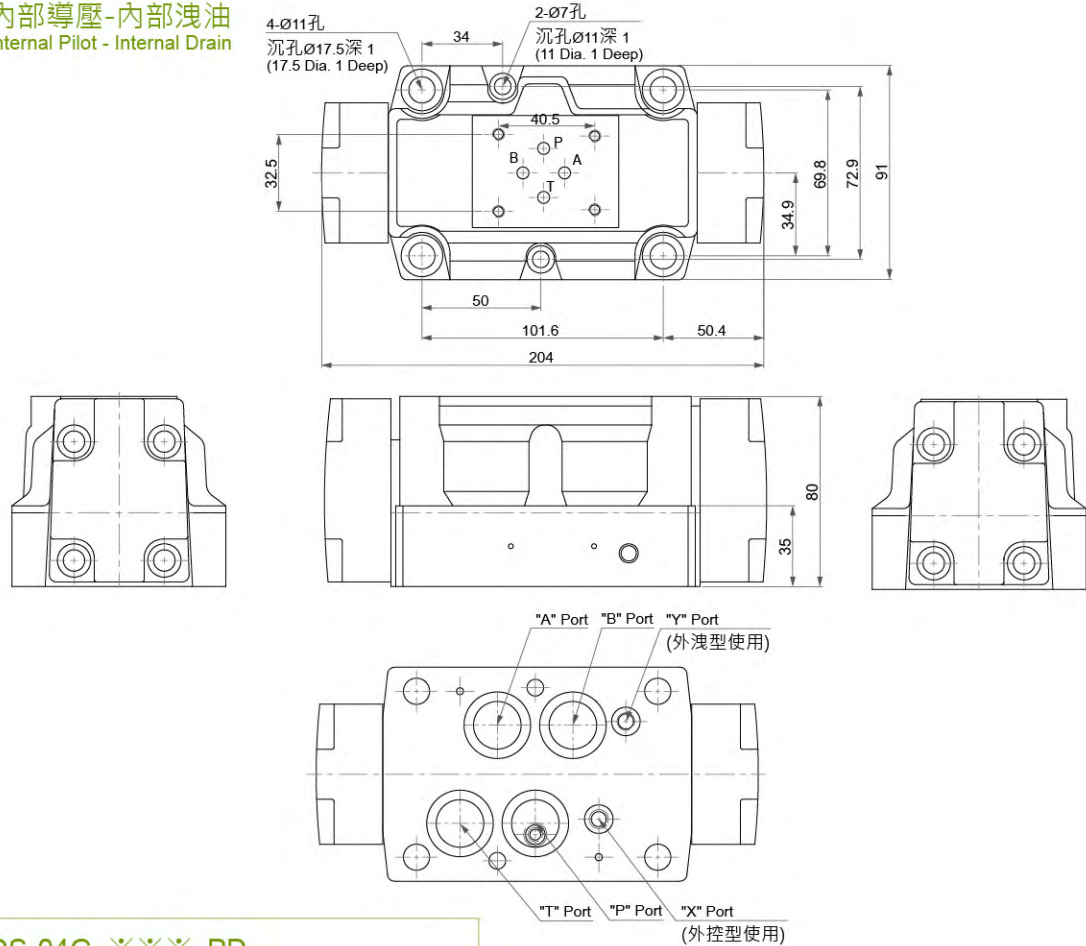


● 外控外洩型 : DS-04G- ※※※ -PD

外部導壓-外部洩油
External Pilot - External Drain

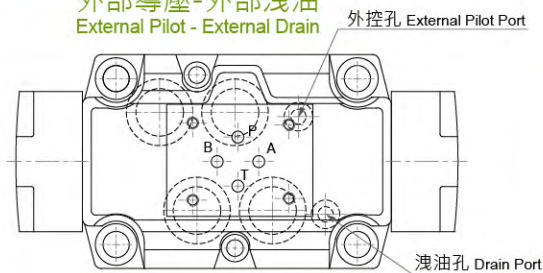


● 外控型 : DS-04G- ※※※ -P

外部導壓-內部洩油
External Pilot - Internal Drain

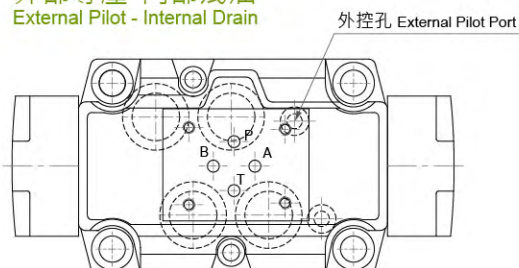

● 外洩型 : DS-04G- ※※※ -D


內部導壓-外部洩油
Internal Pilot - External Drain

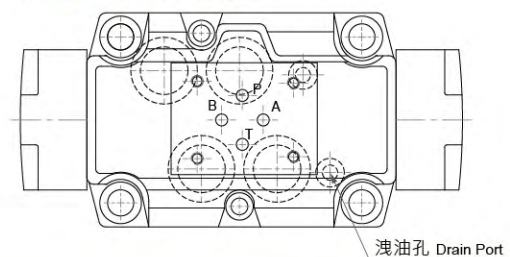

液控換向閥 Pilot Operated Directional Valves


● 內控內洩型 : DS-06G-※※※

內部導壓-內部洩油
Internal Pilot - Internal Drain

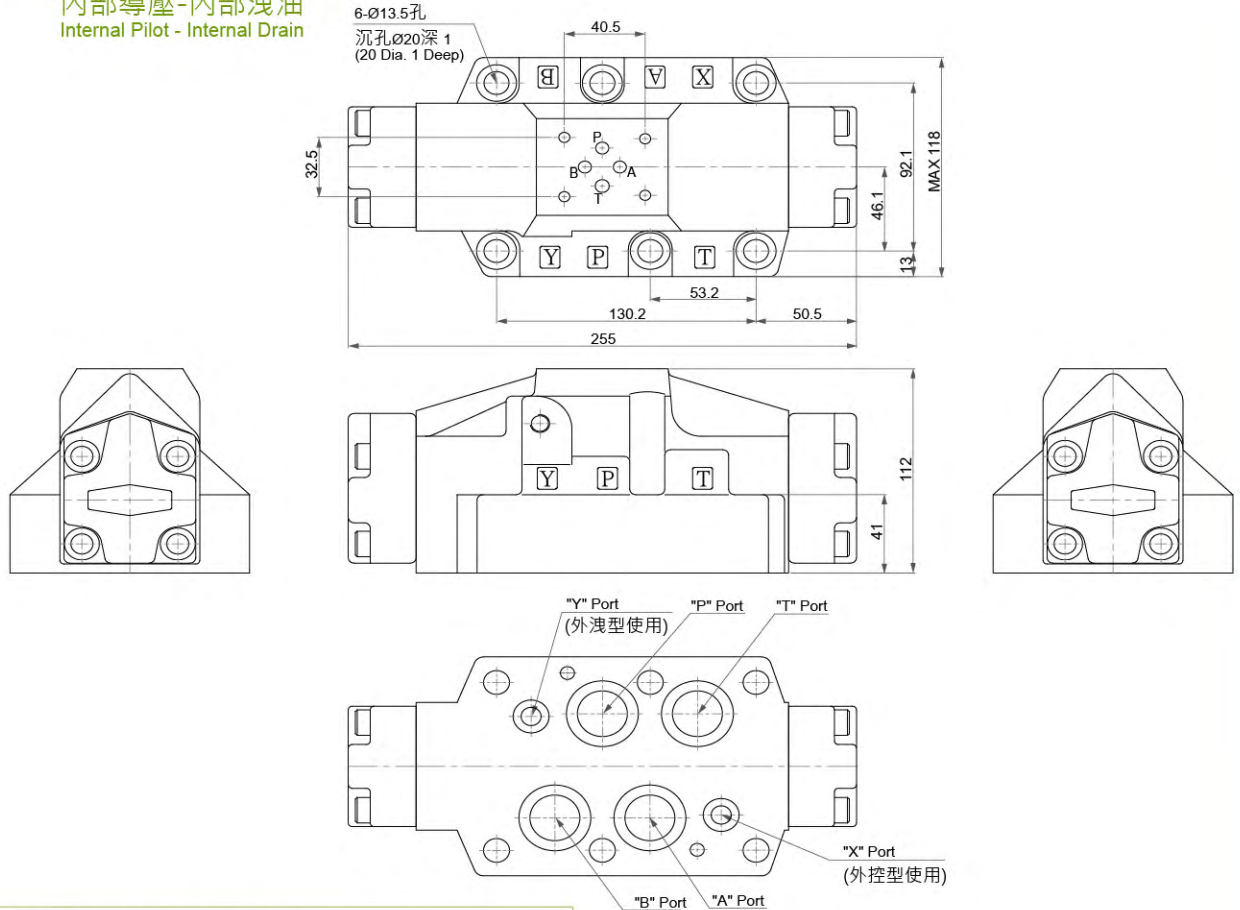


● 外控外洩型 : DS-06G-※※※-PD

外部導壓-外部洩油
External Pilot - External Drain

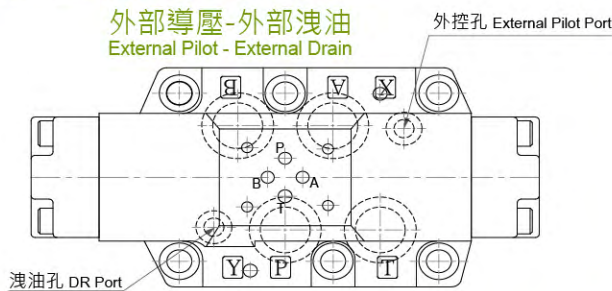


● 外控型 : DS-06G-※※※-P

外部導壓-內部洩油
External Pilot - Internal Drain

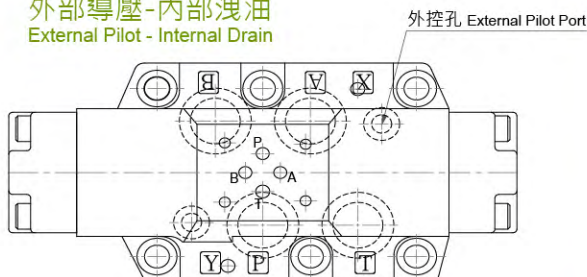

● 外洩型 : DS-06G-※※※-D

內部導壓-外部洩油
Internal Pilot - External Drain

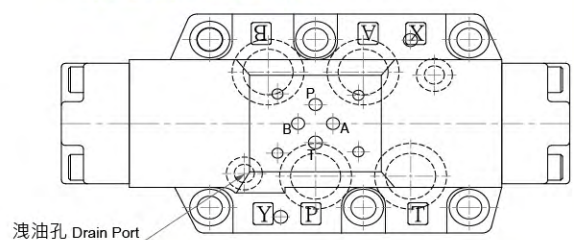


壓力控制閥 Pressure Control Valves

溢流閥 Relief Valves




RV-01

遠程控制溢流閥
Remote Control Relief Valves




RV-02

直動式溢流閥
Direct Type Relief Valves



RV-03/04/06/10

先導控制溢流閥
Pilot Operated Relief Valves



■ 選購指南 HOW TO ORDER

RV	-	01	G	-	B	-	10
系列編號 SERIES NUMBER		閥口徑 VALVE SIZE	作動型式 WORKING TYPE		壓力調整範圍 PRESSURE ADJ. RANGE MPa (kgf/cm ²)		設計號 DESIGN NUMBER
RV		- 01 : 1/8"	G : 座墊式 Sub-plated Type T : 配管式 Thread Type		- B : 0.7 (7) - 7 (70) - C : 1.4 (14) - 14 (140) - H : 3.5 (35) - 21 (210)		- 10 (標準型) Standard Type
		- 02 : 1/4"					
		- 03 : 3/8"					
		- 04 : 1/2"	T : 配管式 Thread Type				
		- 06 : 3/4"	G : 座墊式 Sub-plated Type				
		- 10 : 1-1/4"	T : 配管式 Thread Type				

■ 規格說明 SPECIFICATIONS


型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
RV-01(G/T)	21 (210)	2	1.2 1.3
RV-02(G/T)		16	1.6 1.7
RV-03(G/T)		100	5.3 2.8
RV-04T		100	2.4
RV-06(G/T)		200	6.7 4.2
RV-10(G/T)		400	11.6 7

■ 安裝螺絲 MOUNTING BOLTS


型式 Model Series	安裝螺絲 Mounting Cap Screw
RV-01G	M 5 X 45 L 4pcs
RV-02G	M 5 X 45 L 4pcs
RV-03G	M 12 X 70 L 2pcs / M 12 X 90 L 2pcs
RV-06G	M 16 X 55 L 2pcs / M 16 X 75 L 2pcs
RV-10G	M 20 X 75 L 2pcs / M 20 X 90 L 2pcs

溢流閥 Relief Valves


● RV-01G

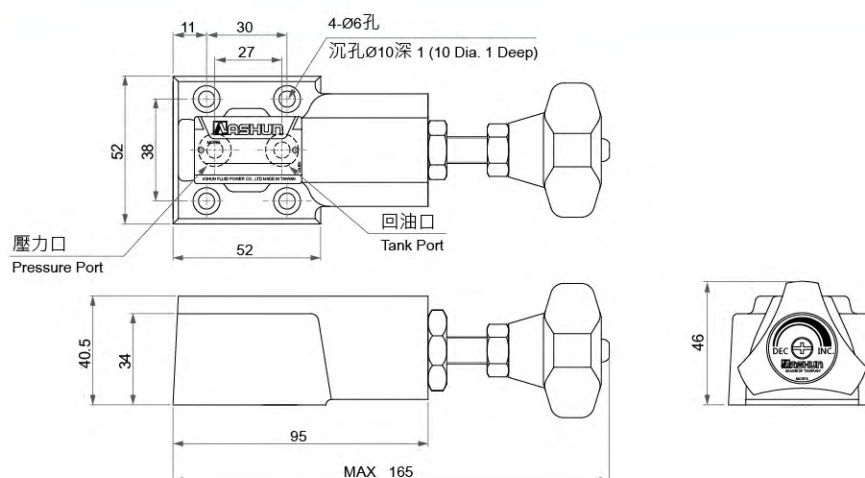

● RV-01T

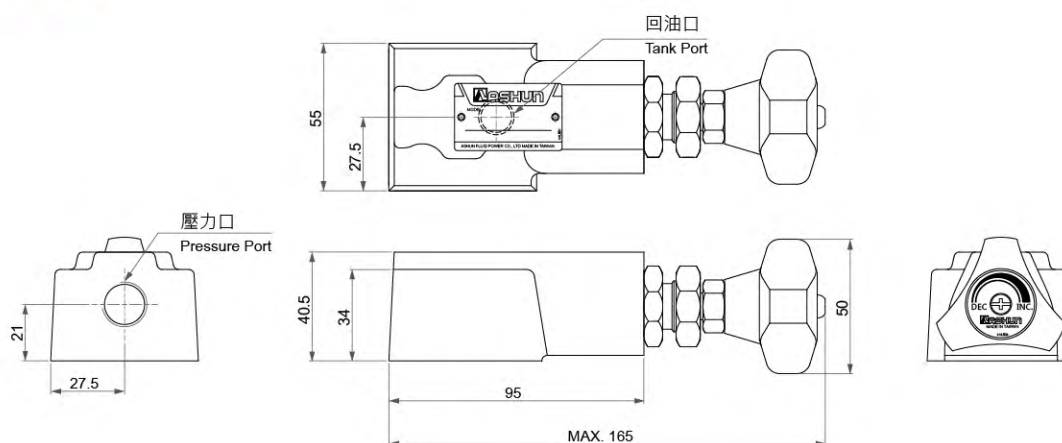


● RV-02G

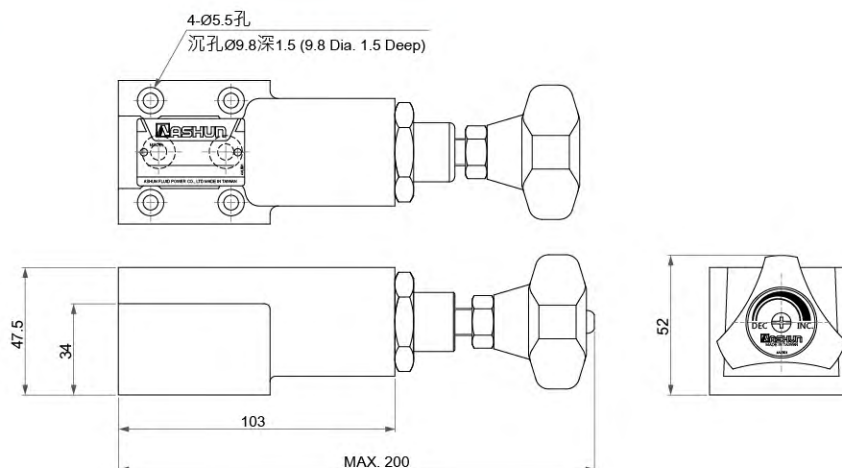


溢流閥 Relief Valves


● RV-02T

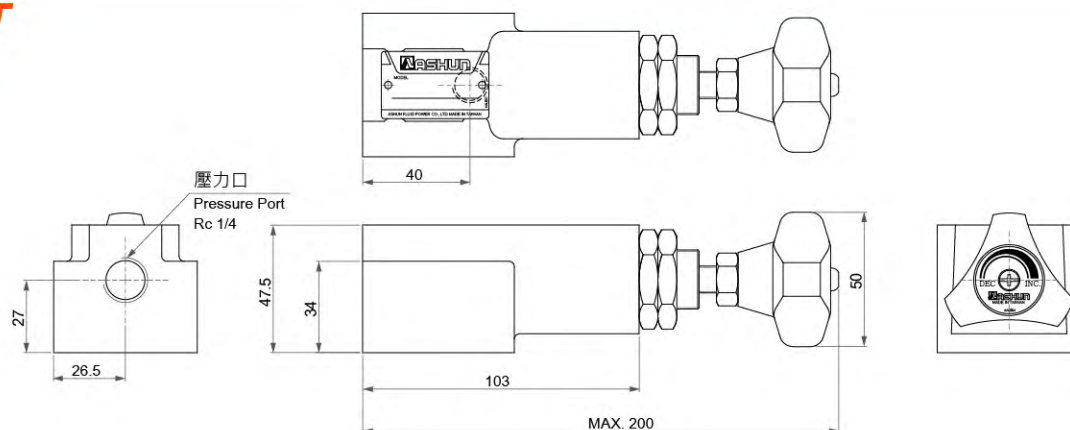

● RV-03G

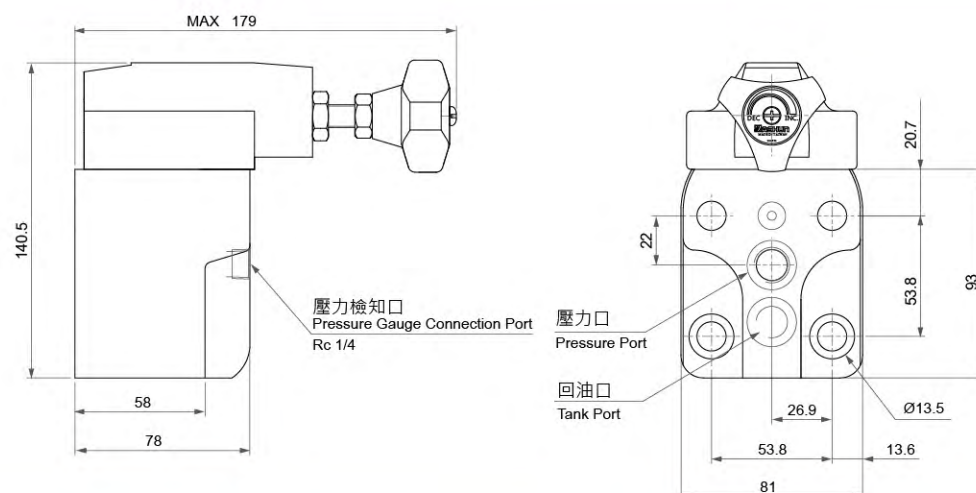

● RV-(06/10)G


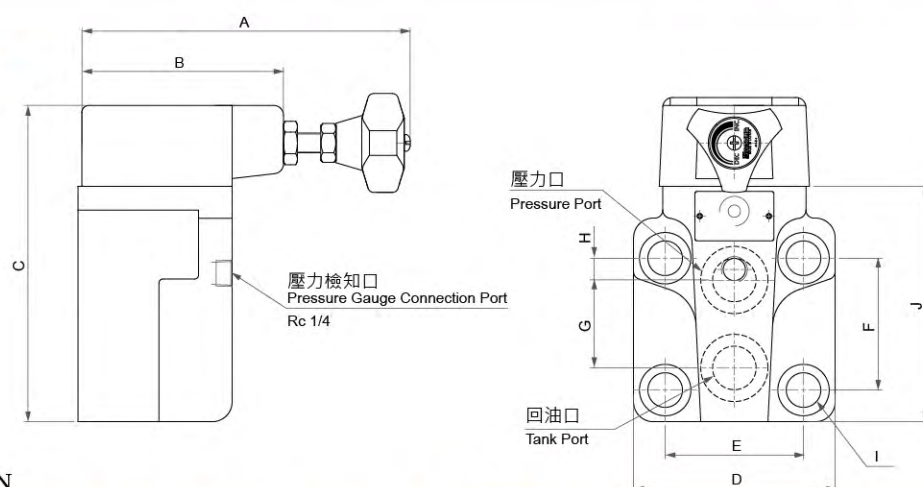


■ 尺寸說明 DIMENSION

型式 Model Series	A	B	C	D	E	F	G	H	I	J
RV-06G	MAX. 172	104	168	103	70	66.7	44.1	11.1	17	123
RV-10G	MAX. 184	104	200	125	82	88.9	63.6	12.7	22	154

溢流閥 Relief Valves


● RV-(03/04/06/10)T

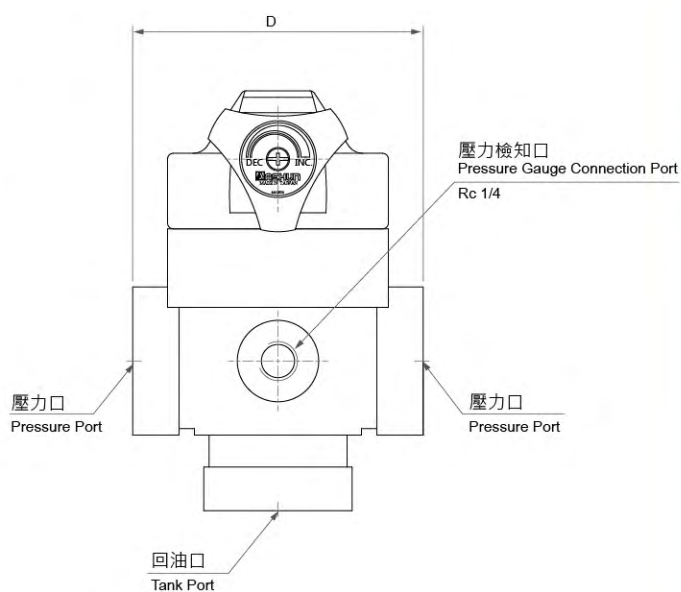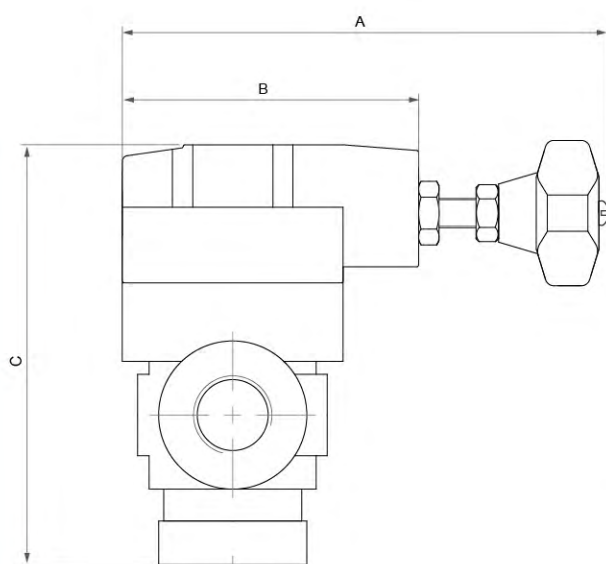

■ 尺寸說明 DIMENSION

型式 Model Series	A	B	C	D
RV-03T	139	92	128	94
RV-04T	139	92	128	94
RV-06T	143	103	144	101
RV-10T	151	104	174	128

低噪聲型溢流閥 Low Noise Type Pilot Operated Relief Valves



■ 選購指南 HOW TO ORDER

SBG	- 03	- B	- L	- 10
系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	壓力調整範圍 PRESSURE ADJ. RANGE MPa (kgf/cm ²)	調整把手方向 HANDLE DIRECTION	設計號 DESIGN NUMBER
SBG (座墊型) Sub-plated Type	- 03 : 3/8"	- B : 0.7 (7) - 7 (70) - C : 1.4 (14) - 14 (140) - H : 3.5 (35) - 21 (210)	- L (回油口 T Port) (標準型 Standard Type) - R (壓力口 P Port)	- 10 (標準型) Standard Type
	- 06 : 3/4"			
	- 10 : 1-1/4"			

■ 規格說明 SPECIFICATIONS




型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
SBG-03	21 (210)	100	4.6
SBG-06		200	5.8
SBG-10		400	10.5

■ 安裝螺絲 MOUNTING BOLTS

型式 Model Series	安裝螺絲 Mounting Cap Screw
SBG-03	M 12 X 35 L 4pcs
SBG-06	M 16 X 45 L 4pcs
SBG-10	M 20 X 60 L 4pcs

低噪聲型溢流閥 Low Noise Type Pilot Operated Relief Valves

● SBG-03/06/10

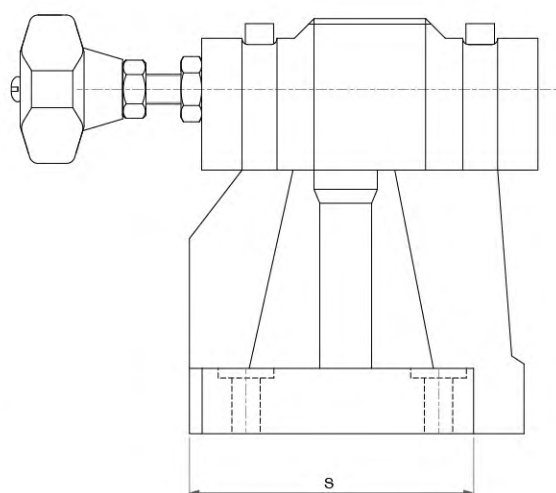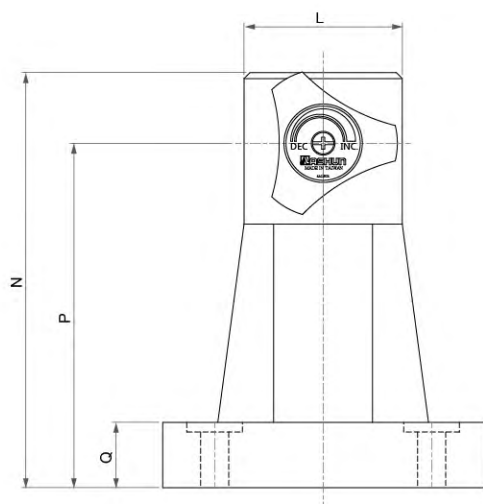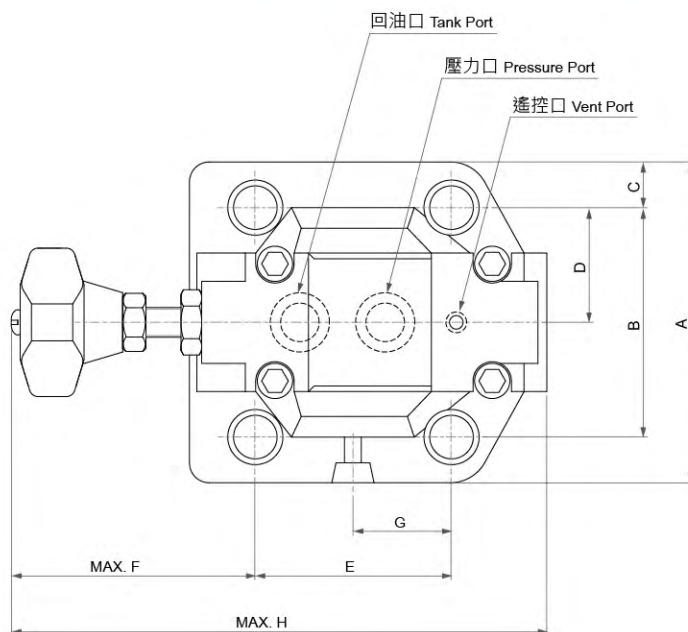

■ 尺寸說明 SPECIFICATIONS


型式 Model Series	A	B	C	D	E	F	G	H	L	N	P	Q	S
SBG-03	76	53.8	11.1	26.9	53.8	113.5	27	171	51	132	104	22	106
SBG-06	104	70	17	35	66.7	98.8	33.7	171	51	132	104	27	123
SBG-10	120	82.6	18.7	41.3	88.9	58.6	44.9	188	65	167	135	33.5	155

低噪聲型電磁控制溢流閥 Low Noise Type Solenoid Controlled Relief Valves



使用電磁換向閥型式
USE SOLENOID OPERATED
DIRECTIONAL VALVES

AHD-G02-2B3A AHD-G02-2B2
AHD-G02-2B3B AHD-G02-3C2
AHD-G02-2B2B AHD-G02-3C3

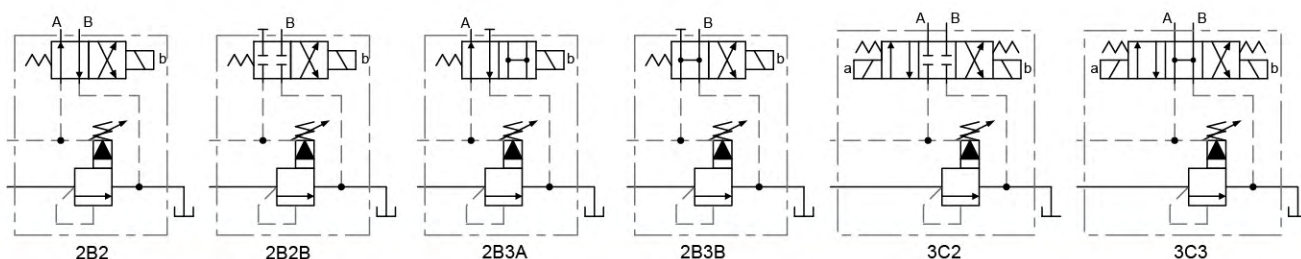

■ 選購指南 HOW TO ORDER

系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	壓力調整範圍 PRESSURE ADJ. RANGE MPa (kgf/cm ²)	調整把手方向 HANDLE DIRECTION	設計號 DESIGN NUMBER
SBSG (座墊型) Sub-plated Type	- 03 : 3/8"	- B : 0.7 (7) - 7 (70)	- L (回油口 T Port) (標準型 Standard Type) - R (壓力口 P Port)	- 10 (標準型) Standard Type
	- 06 : 3/4"	- C : 1.4 (14) - 14 (140)		
	- 10 : 1-1/4"	- H : 3.5 (35) - 21 (210)		

■ 規格說明 SPECIFICATIONS




型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
SBSG-03	21 (210)	100	4.7
SBSG-06		200	5.7
SBSG-10		400	11.5

■ 安裝螺絲 MOUNTING BOLTS

型式 Model Series	安裝螺絲 Mounting Cap Screw
SBSG-03	M 12 X 40 L 4pcs
SBSG-06	M 16 X 50 L 4pcs
SBSG-10	M 20 X 65 L 4pcs

低噪聲型電磁控制溢流閥 Low Noise Type Solenoid Controlled Relief Valves


● SBSG-03/06/10

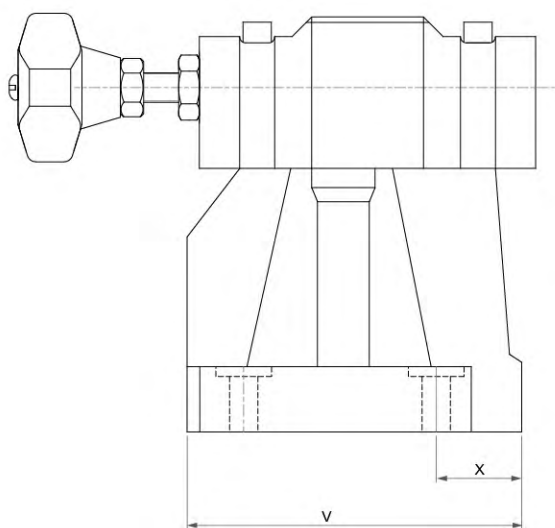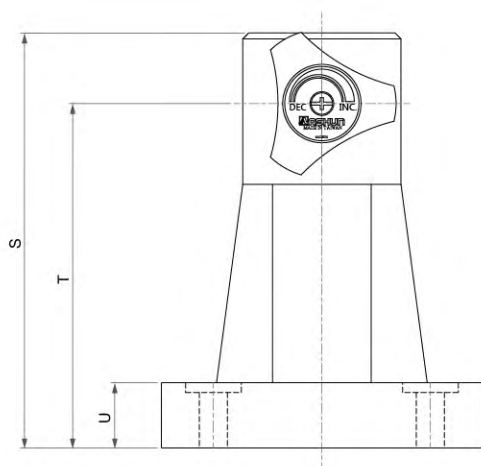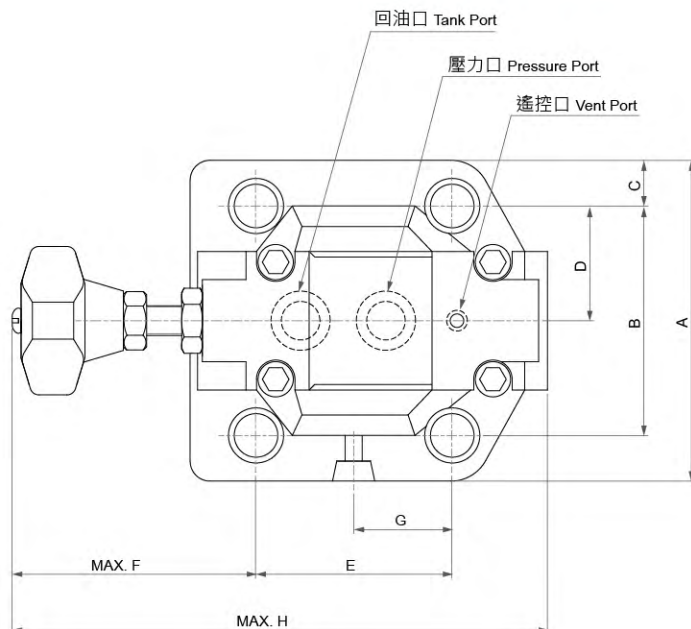

■ 尺寸說明 SPECIFICATIONS

型式 Model Series	A	B	C	D	E	F	G	H	S	T	U	V	X
SBSG-03	77	53.8	11.1	26.9	53.8	113.5	27	171	132	104	24	106	14
SBSG-06	99	70	17	35	66.7	98.8	33.7	171	132	104	30	132	14
SBSG-10	126	82	22.5	41	90	89	46	219	148	120	37	152	22

電磁控制溢流閥 Solenoid Controlled Relief Valves

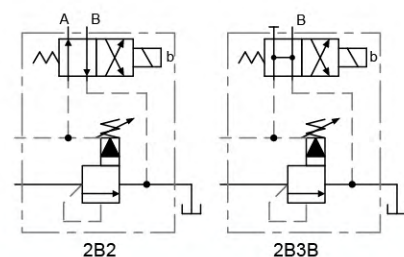

■ 選購指南 HOW TO ORDER

SRV	- 03	G	- B	- 10
系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	安裝型式 TYPE OF CONNECTION	壓力調整範圍 PRESSURE ADJ. RANGE MPa (kgf/cm ²)	設計號 DESIGN NUMBER
SRV	- 03 : 3/8"	G : 座墊型 Sub-plated Type	- B : 0.7 (7) - 7 (70) - C : 1.4 (14) - 14 (140) - H : 3.5 (35) - 21 (210)	- 10 (標準型) Standard Type
	- 04 : 1/2"	T : 配管型 Thread Type		
	- 06 : 3/4"	G : 座墊型 Sub-plated Type		
	- 10 : 1-1/4"	T : 配管型 Thread Type		

■ 規格說明 SPECIFICATIONS




型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)	
SRV-03G	21 (210)	100	5.5	
SRV-04T		100	4.3	
SRV-06(G/T)		200	6.8	4.7
SRV-10(G/T)		400	11	7

■ 安裝螺絲 MOUNTING BOLTS

型式 Model Series	安裝螺絲 Mounting Cap Screw
SRV-03G	M 12 X 70 L 2pcs / M 12 X 90 L 2pcs
SRV-06G	M 16 X 55 L 2pcs / M 16 X 75 L 2pcs
SRV-10G	M 20 X 70 L 2pcs / M 20 X 90 L 2pcs

電磁控制溢流閥 Solenoid Controlled Relief Valves

● SRV-(03/06/10)G

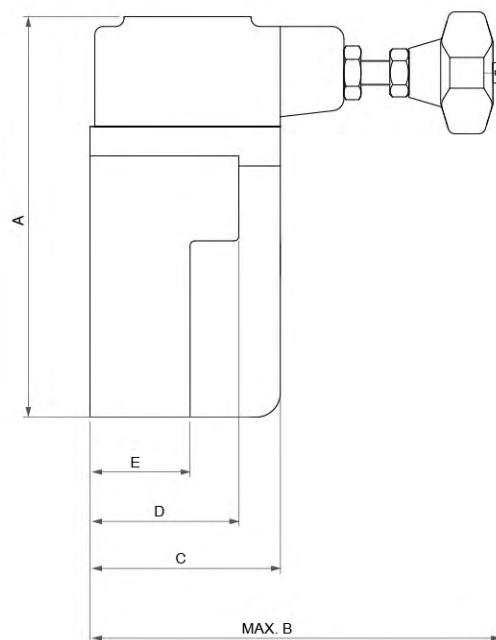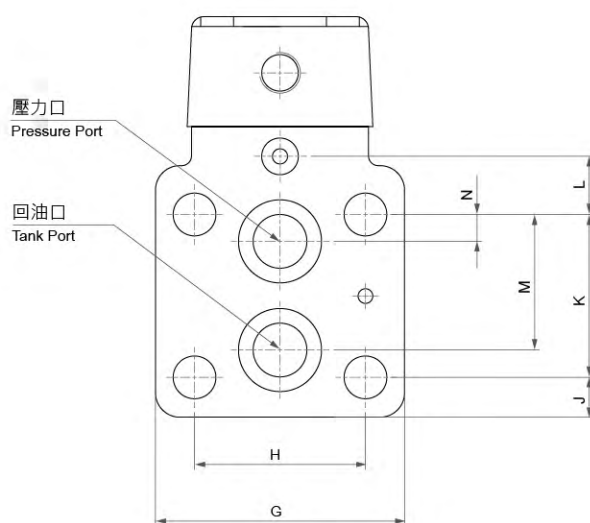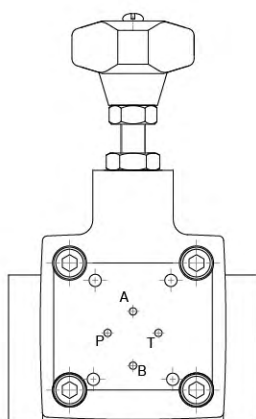


■ 尺寸說明 DIMENSION

型式 Model Series	A	B	C	D	E	G	H	J	K	L	M	N
SRV-03G	228.5	175	78	78	57	82	53.8	21.5	53.8	0	47.5	22
SRV-06G	254	175	78	60	40	104	70	19	66.7	23.8	55.5	11
SRV-10G	281	184	87.5	67	47	125	52.6	18.5	88.9	31.8	76.2	12.7

電磁控制溢流閥 Solenoid Controlled Relief Valves

● SRV-(04/06/10)T

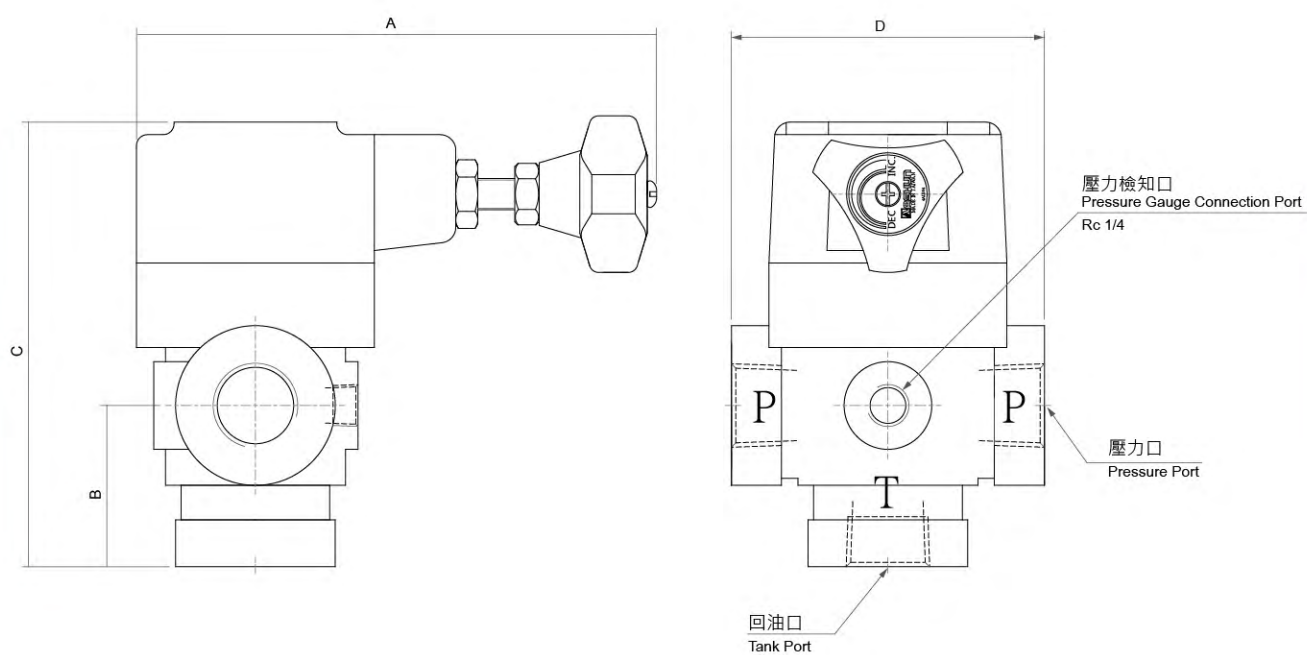

■ 尺寸說明 DIMENSION

型式 Model Series	A	B	C	D
SRV-04T	MAX. 165	51	142	103
SRV-06T	MAX. 165	51	142	103
SRV-10T	MAX. 151	68	175	130

電磁控制溢流閥 Solenoid Controlled Relief Valves



使用電磁換向閥型式
USE SOLENOID OPERATED
DIRECTIONAL VALVES


閥型式 (Valve Type) 2P:

AHD-G02-3C3 AHD-G02-3C6 AHD-G02-3C60


閥型式 (Valve Type) 3P:

AHD-G02-3C6 AHD-G02-3C60

2P : 二段壓力 2 SECTION PRESSURE

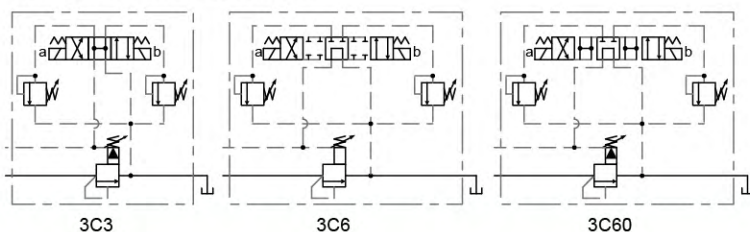

3P : 三段壓力 3 SECTION PRESSURE

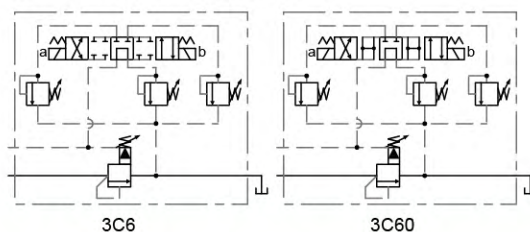

■ 選購指南 HOW TO ORDER

SRV	- 03	G	- 2P	- B	- 10
系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	安裝型式 TYPE OF CONNECTION	座動型式 WORKING TYPE	壓力調整範圍 PRESSURE ADJ. RANGE MPa (kgf/cm ²)	設計號 DESIGN NUMBER
SRV	- 03 : 3/8"	G : 座墊式 Sub-plated Type	- 2P (二段壓力調整) 2 Section Pressure - 3P (三段壓力調整) 3 Section Pressure	- B : 0.7 (7) - 7 (70) - C : 1.4 (14) - 14 (140) - H : 3.5 (35) - 21 (210)	- 10 (標準型) Standard Type
	- 04 : 1/2"	T : 配管式 Thread Type			
	- 06 : 3/4"	G : 座墊型 Sub-plated Type			
	- 10 : 1-1/4"	T : 配管型 Thread Type			

■ 規格說明 SPECIFICATIONS


型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
SRV-03G-3P	21 (210)	100	7.7
SRV-04T-3P		100	6.5
SRV-06(G/T)-3P		200	9 7
SRV-10(G/T)-3P		400	13.7 13

■ 安裝螺絲 MOUNTING BOLTS

型式 Model Series	安裝螺絲 Mounting Cap Screw
SRV-03G	M 12 X 70 L 2pcs / M 12 X 90 L 2pcs
SRV-06G	M 16 X 55 L 2pcs / M 16 X 75 L 2pcs
SRV-10G	M 20 X 70 L 2pcs / M 20 X 90 L 2pcs

電磁控制溢流閥 Solenoid Controlled Relief Valves


● SRV-(03/06/10)G-2P/3P

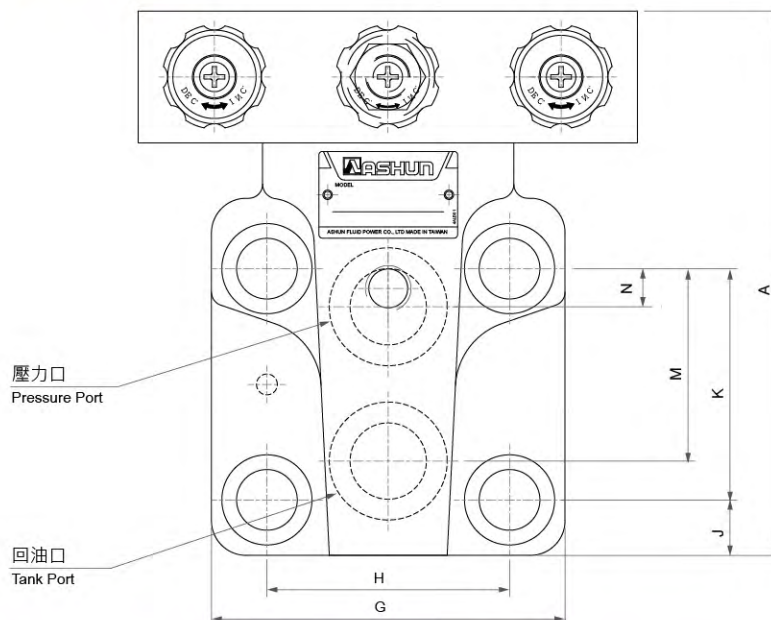

■ 尺寸說明 DIMENSION

型式 Model Series	A	G	H	J	K	M	N
SRV-03G-(2P/3P)	94	82	53.8	21.5	53.8	47.5	22
SRV-06G-(2P/3P)	119	104	70	19.5	66.7	55.5	11
SRV-10G-(2P/3P)	156	125	82.6	18.5	88.9	76.2	12.7


● SRV-(04/06/10)T-2P/3P

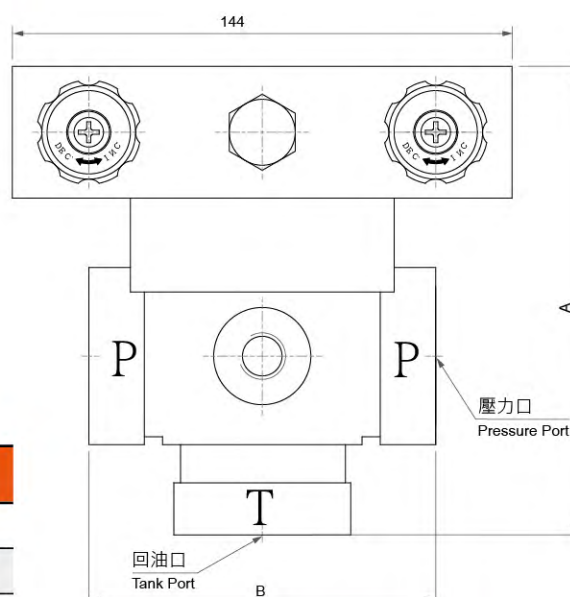

■ 尺寸說明 DIMENSION

型式 Model Series	A	B
SRV-04T-(2P/3P)	135	100
SRV-06T-(2P/3P)	135	100
SRV-10T-(2P/3P)	165	133

減壓閥 Pressure Reducing Valves



■ 選購指南 HOW TO ORDER

BRV	- 02	G	- A	- 10
系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	安裝型式 TYPE OF CONNECTION	壓力調整範圍 PRESSURE ADJ. RANGE MPa (kgf/cm ²)	設計號 DESIGN NUMBER
BRV	- 02 : 1/4"	G : 座墊式 Sub-plated Type T : 配管式 Thread Type	- A : 0.3 (3) - 3.5 (35) - B : 0.7 (7) - 7 (70) - C : 3.5 (35) - 14 (140) - H : 7 (70) - 21 (210)	- 10 (標準型) Standard Type
	- 03 : 3/8"			
	- 06 : 3/4"			
	- 10 : 1-1/4"			

■ 規格說明 SPECIFICATIONS


型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)	
BRV-02 (G/T)	21 (210)	40	1.3	1.5
BRV-03 (G/T)		50	4.7	4.4
BRV-06 (G/T)		125	6.8	7.5
BRV-10 (G/T)		250	11.5	13

■ 安裝螺絲 MOUNTING BOLTS

型式 Model Series	安裝螺絲 Mounting Cap Screw
BRV-03G	M 10 X 50 L 4pcs
BRV-06G	
BRV-10G	M 10 X 50 L 6pcs

減壓閥 Pressure Reducing Valves


● BRV-02G

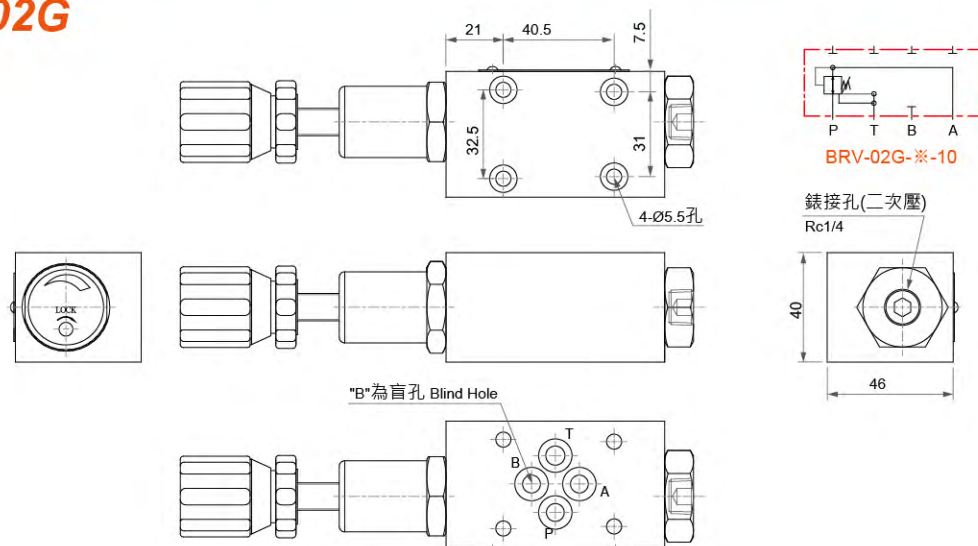

註:迴油配管請直接回油箱或油路板鑽BT通接B孔迴油
Oil return piping directly back to the oil tank or plate, drill hole BT through B port

● BRV-(03/06)G

● BRV-10G

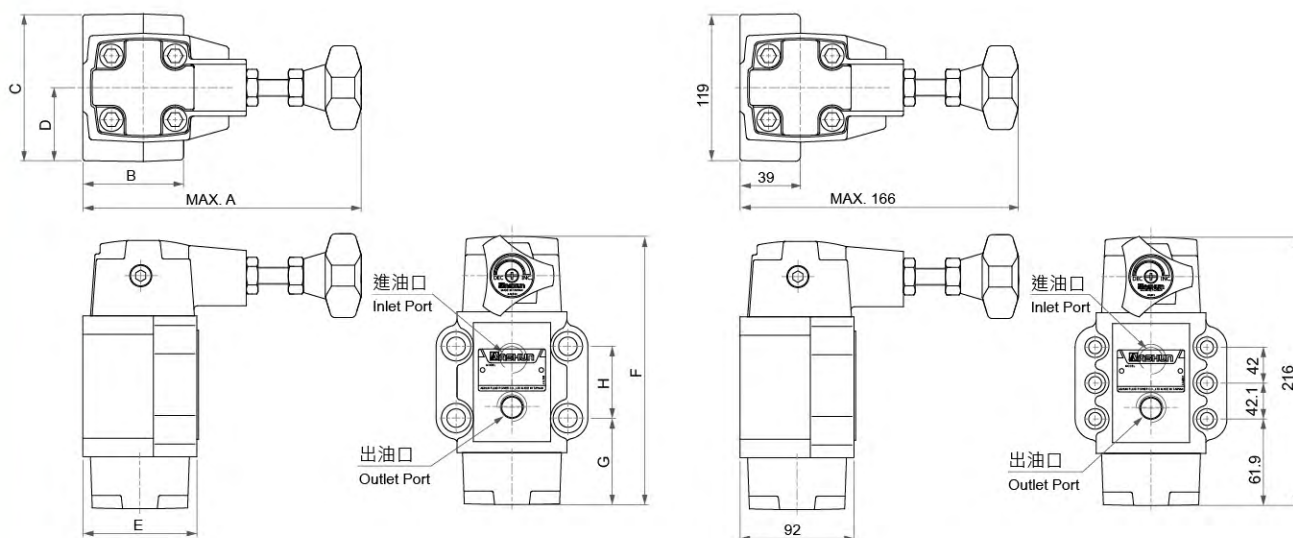


■ 尺寸說明 DIMENSION

型式 Model Series	A	B	C	D	E	F	G	H
BRV-03G	164	42	90	45	68	153	49.6	42.8
BRV-06G	165.8	42	102	51	77	187	50.7	60.3


減壓閥 Pressure Reducing Valves

● BRV-02T

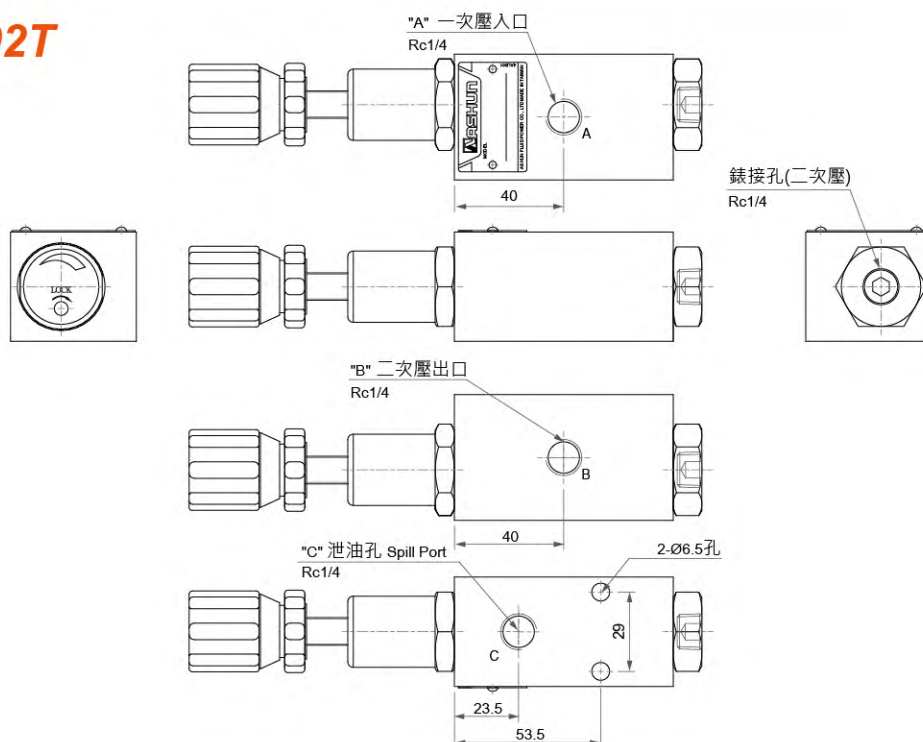

● BRV-03T


● BRV-(06/10)T

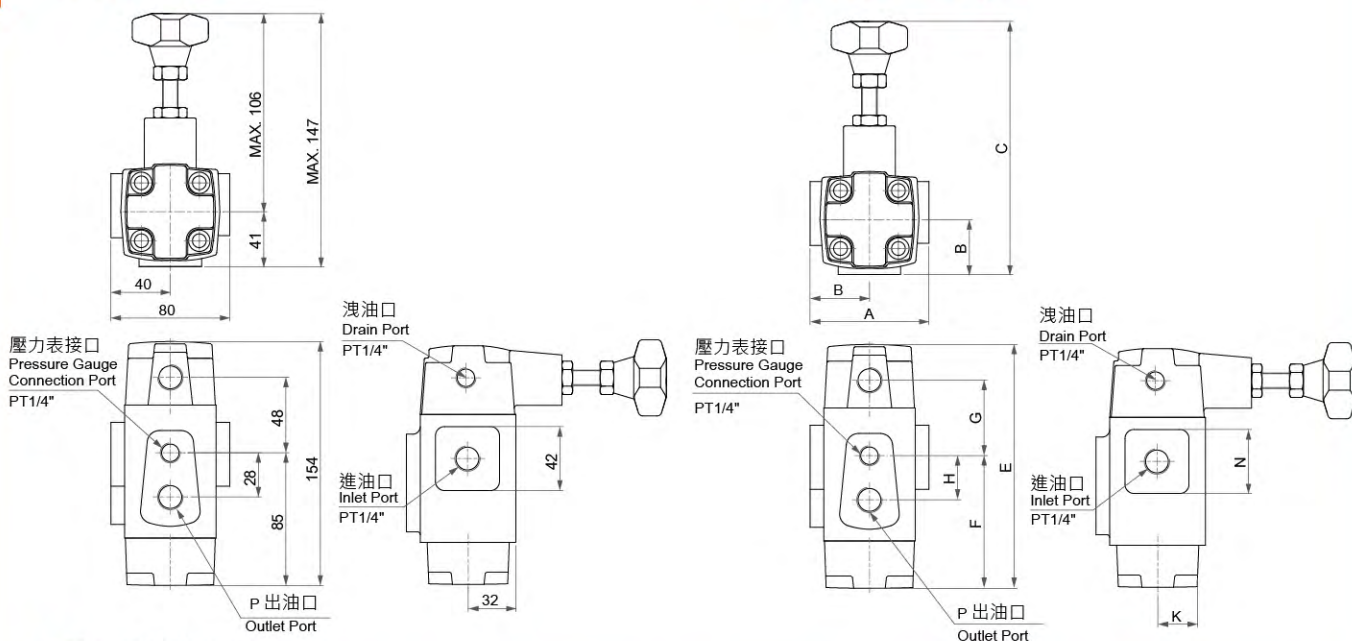

■ 尺寸說明 DIMENSION

型式 Model Series	A	B	C	E	F	G	H	K	N	P
BRV-06T	94	47	170.8	178	109	53.5	44.2	39	62	3/4
BRV-10T	132	66	167	216	124	64	40	50	79	11/4

單向減壓閥 Pressure Reducing and Check Valves



■ 選購指南 HOW TO ORDER

BRCV	- 03	G	- A	- 10
系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	安裝型式 TYPE OF CONNECTION	壓力調整範圍 PRESSURE ADJ. RANGE MPa (kgf/cm ²)	設計號 DESIGN NUMBER
BRCV	- 03 : 3/8"	G : 座墊式 Sub-plated Type T : 配管式 Thread Type	- A : 0.3 (3) - 3.5 (35) - B : 0.7 (7) - 7 (70) - C : 3.5 (35) - 14 (140) - H : 7 (70) - 21 (210)	- 10 (標準型) Standard Type
	- 06 : 3/4"			
	- 10 : 1-1/4"			

■ 規格說明 SPECIFICATIONS


型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)	
BRCV-03 (G/T)	21 (210)	50	5.6	4.8
BRCV-06 (G/T)		125	8.6	8
BRCV-10 (G/T)		250	13.8	13.8

■ 安裝螺絲 MOUNTING BOLTS

型式 Model Series	安裝螺絲 Mounting Cap Screw
BRCV-03G	M 10 X 70 L 4pcs
BRCV-06G	M 10 X 80 L 4pcs
BRCV-10G	M 10 X 90 L 6pcs

單向減壓閥 Pressure Reducing and Check Valves


● BRCV-(03/06)G

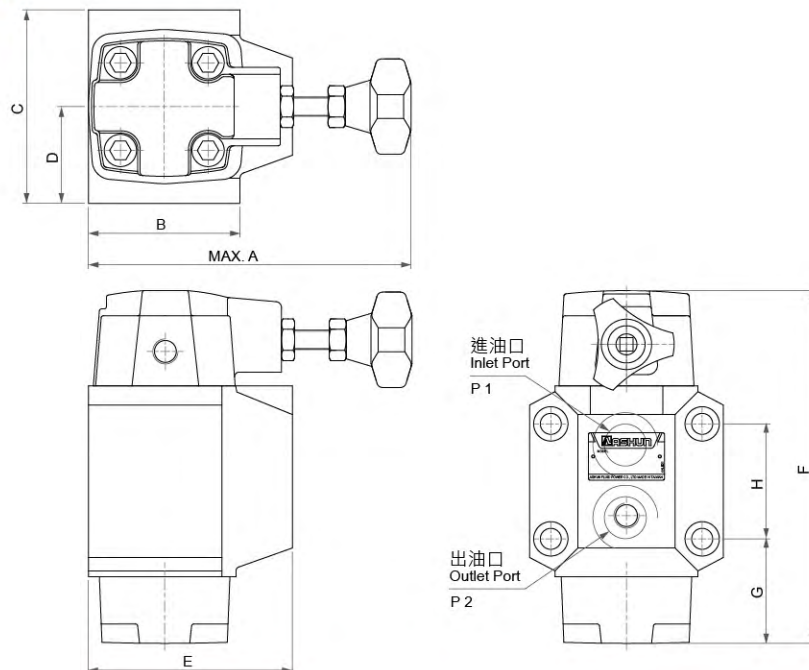

■ 尺寸說明 DIMENSION


型式 Model Series	A	B	C	D	E	F	G	H
BRCV-03G	164	59	89	44.5	90	155.5	49.6	42.8
BRCV-06G	164	70.5	102	51	108	188	50.7	60.3

● BRCV-10G

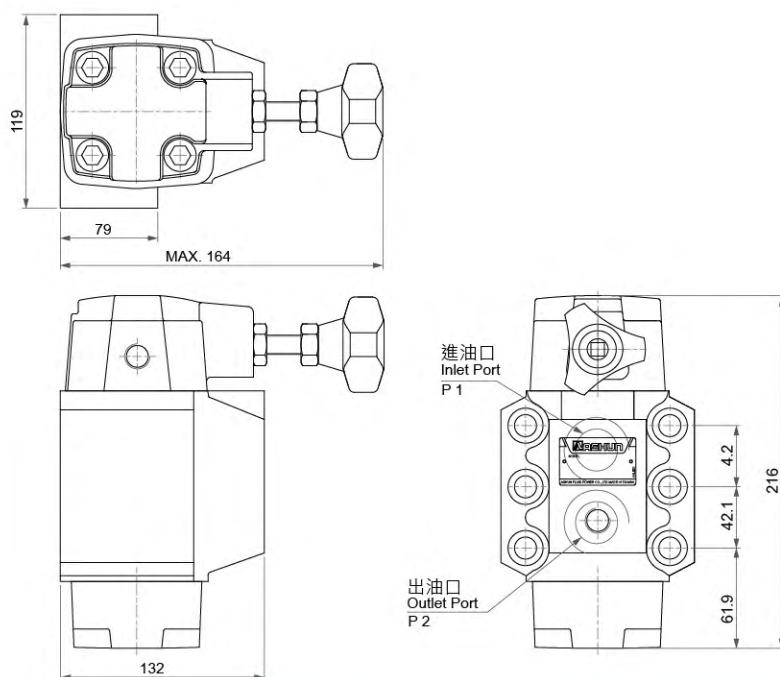


單向減壓閥 Pressure Reducing and Check Valves

● BRCV-03T

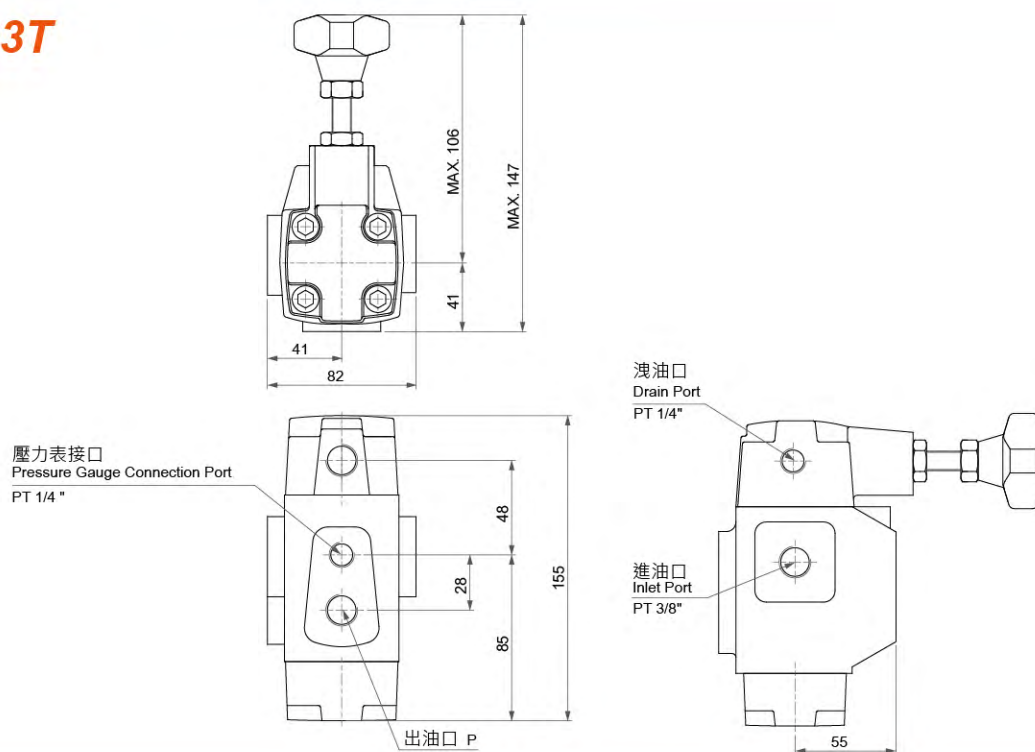

● BRCV-(06/10)T

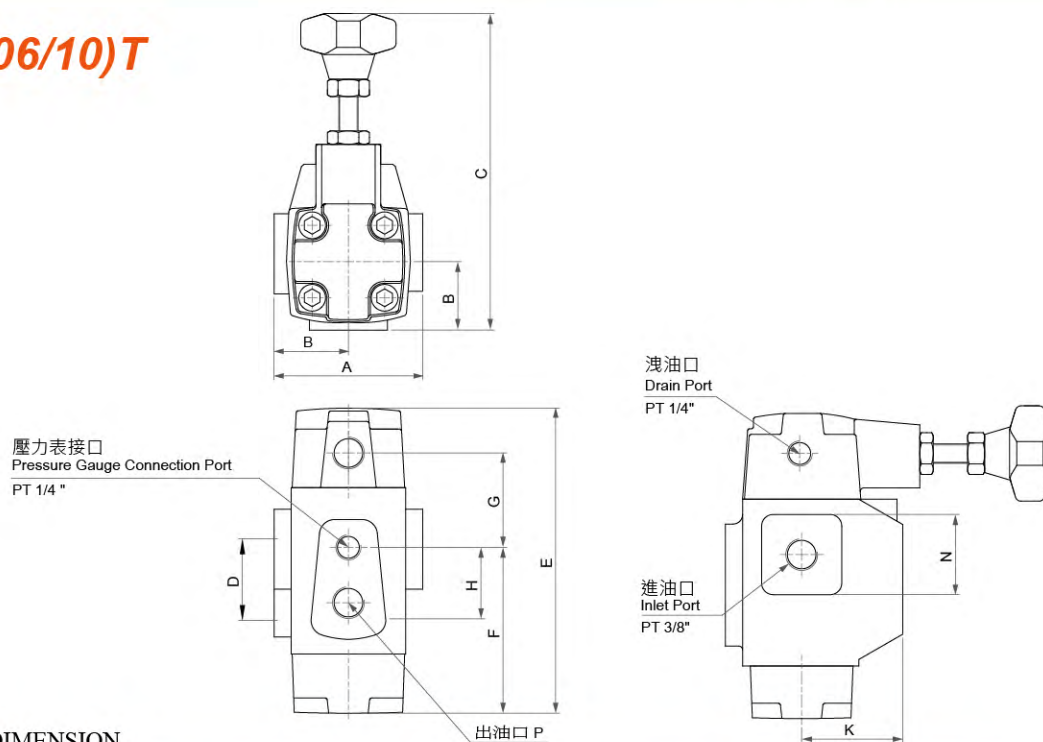

■ 尺寸說明 DIMENSION

型式 Model Series	A	B	C	D	E	F	G	H	K	N
BRCV-06T	94	48	150	42	179	97.5	44.5	42	66	62
BRCV-10T	137	68.7	167	52	216	124	52	52	84	79

壓力控制閥 Pressure Control Valves



閥型式 Valve Type	1 : 低壓溢流閥 Type 1 : Low Pressure Relief Valve	2 : 順序閥 Type 2 : Sequence Valve	3 : 順序閥 Type 3 : Sequence Valve	4 : 卸載閥 Type 4 : Unloading Valve
引導洩油型式 Pilot Drain Type	內部引導 內部洩油 Internal Pilot Internal Drain	內部引導 外部洩油 Internal Pilot External Drain	外部引導 外部洩油 External Pilot External Drain	外部引導 內部洩油 External Pilot Internal Drain
示意圖 Activity Diagram				
液壓符號 Symbol				

選購指南 HOW TO ORDER

系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	安裝型式 TYPE OF CONNECTION	壓力調整範圍 PRESSURE ADJ. RANGE MPa (kgf/cm ²)	閥型式 VALVE TYPE	設計號 DESIGN NUMBER
SV	- 03 : 3/8"	G : 座墊式 Sub-plated Type T : 配管式 Thread Type	- A : 1.8 (18) - 3.5 (35) - B : 3.5 (35) - 7 (70) - C : 7 (70) - 14 (140)	- 1 : 低壓溢流閥 Type 1 : Low Pressure Relief Valve	- 10 (標準型) Standard Type
	- 06 : 3/4"			- 2 : 順序閥 Type 2 : Sequence Valve	
	- 10 : 1-1/4"			- 3 : 順序閥 Type 3 : Sequence Valve - 4 : 卸載閥 Type 4 : Unloading Valve	

規格說明 SPECIFICATIONS


型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)	
SV-03 (G/T)	21 (210)	50	4	3.7
SV-06 (G/T)		125	6.1	6.2
SV-10 (G/T)		250	11	12

安裝螺絲 MOUNTING BOLTS

型式 Model Series	安裝螺絲 Mounting Cap Screw
SV-03G	M 10 X 50 L 4pcs
SV-06G	
SV-10G	M 10 X 50 L 6pcs

壓力控制閥 Pressure Control Valves


• SV-(03/06)G

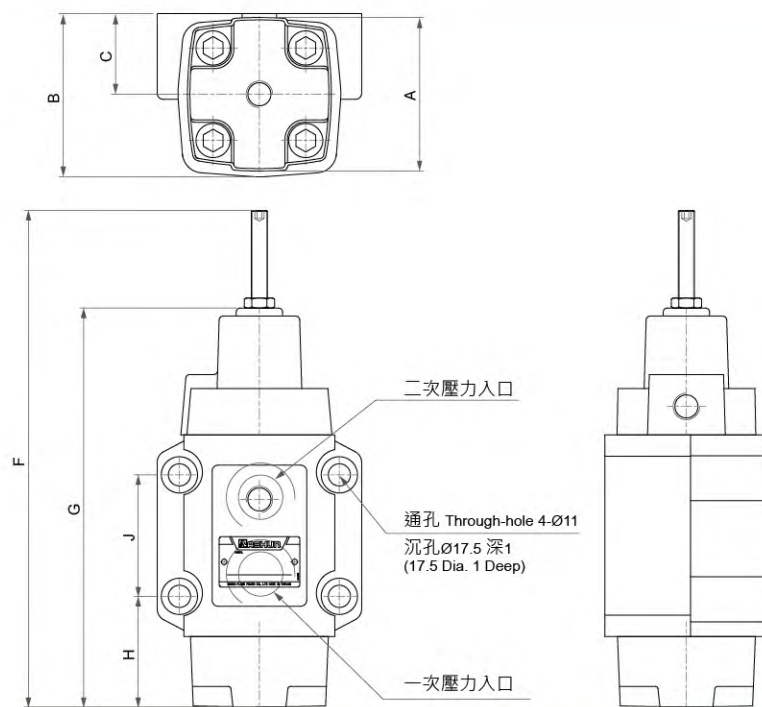

■ 尺寸說明 DIMENSION




型式 Model Series	A	B	C	F	G	H	J
SV-03G	60	67	41	191	167	49.6	42.8
SV-06G	73	77	40	221	188	51	60.3

• SV-10G

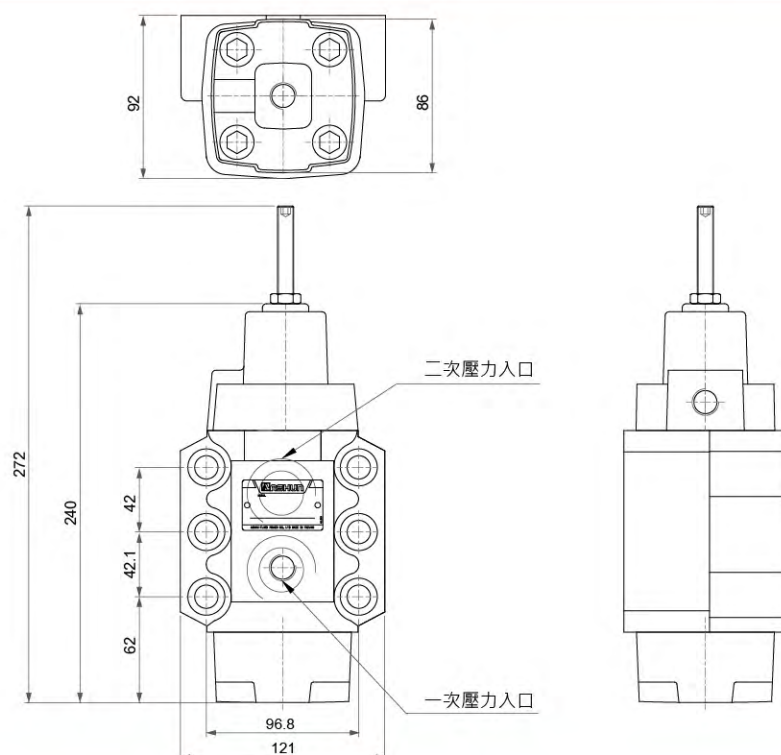

壓力控制閥 Pressure Control Valves

● SV-(03/06/10)T

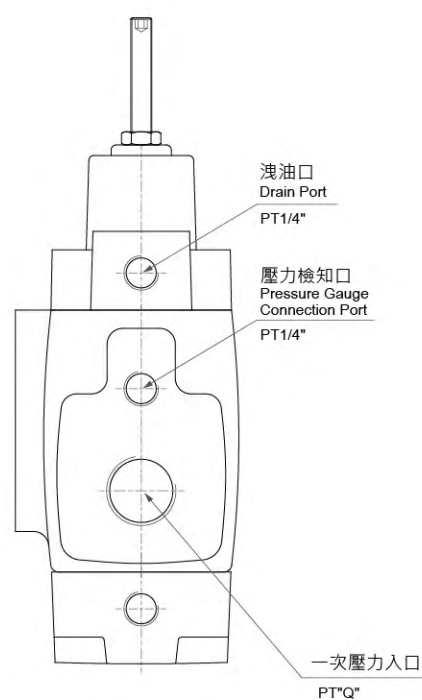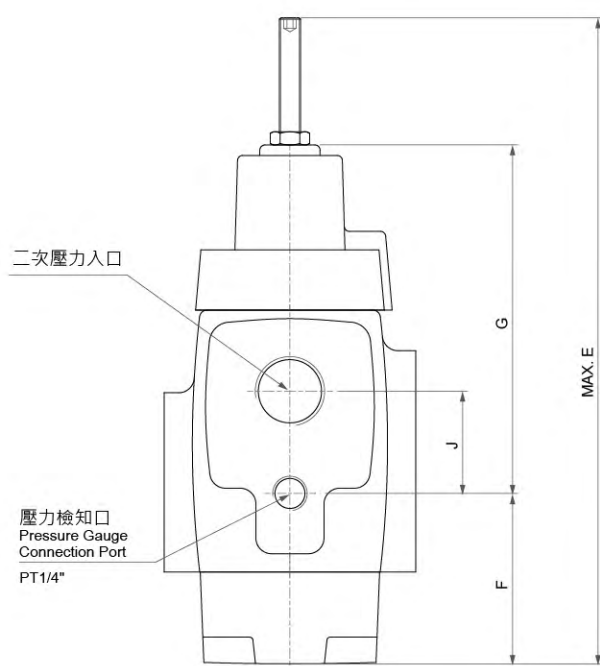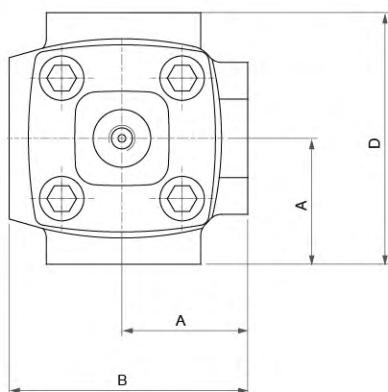

■ 尺寸說明 DIMENSION

型式 Model Series	A	B	D	E	F	G	J	Q
SV-03T	40	80	73	191	57	106	70	3/8
SV-06T	48	96	87	221	64.5	123.5	80.5	3/4
SV-10T	68.5	137	112	272	84	149	98	11/4

壓力控制閥 Pressure Control Valves



閥型式 Valve Type	1 : 平衡閥 Type 1 : Counterbalance Valve	2 : 單向順序閥 Type 2 : Sequence with Check Valve	3 : 單向順序閥 Type 3 : Sequence with Check Valve	4 : 平衡閥 Type 4 : Counterbalance Valve
引導洩油型式 Pilot Drain Type	內部引導 內部洩油 Internal Pilot Internal Drain	內部引導 外部洩油 Internal Pilot External Drain	外部引導 外部洩油 External Pilot External Drain	外部引導 內部洩油 External Pilot Internal Drain
示意圖 Activity Diagram				
液壓符號 Symbol				

■ 選購指南 HOW TO ORDER

系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	安裝型式 TYPE OF CONNECTION	壓力調整範圍 PRESSURE ADJ. RANGE MPa (kgf/cm ²)	閥型式 VALVE TYPE	設計號 DESIGN NUMBER
SCV	- 03 : 3/8"	G : 座墊式 Sub-plated Type T : 配管式 Thread Type	A : 1.8 (18) - 3.5 (35) B : 3.5 (35) - 7 (70) C : 7 (70) - 14 (140)	- 1 : 平衡閥 Type 1 : Counterbalance Valve	- 10 (標準型) Standard Type
	- 06 : 3/4"			- 2 : 單向順序閥 Type 2 : Sequence Pilot Check Valve	
	- 10 : 1-1/4"			- 3 : 單向順序閥 Type 3 : Sequence Pilot Check Valve - 4 : 平衡閥 Type 4 : Counterbalance Valve	

■ 規格說明 SPECIFICATIONS


型式 Model Series	最高使用壓力 Max. Operated Pressure (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)	
SCV-03 (G/T)	21 (210)	50	4.8	4.1
SCV-06 (G/T)		125	8	7.5
SCV-10 (G/T)		250	14.5	16

■ 安裝螺絲 MOUNTING BOLTS

型式 Model Series	安裝螺絲 Mounting Cap Screw
SCV-03G	M 10 X 70 L 4pcs
SCV-06G	M 10 X 80 L 4pcs
SCV-10G	M 10 X 90 L 6pcs

壓力控制閥 Pressure Control Valves


● SCV-(03/06)G

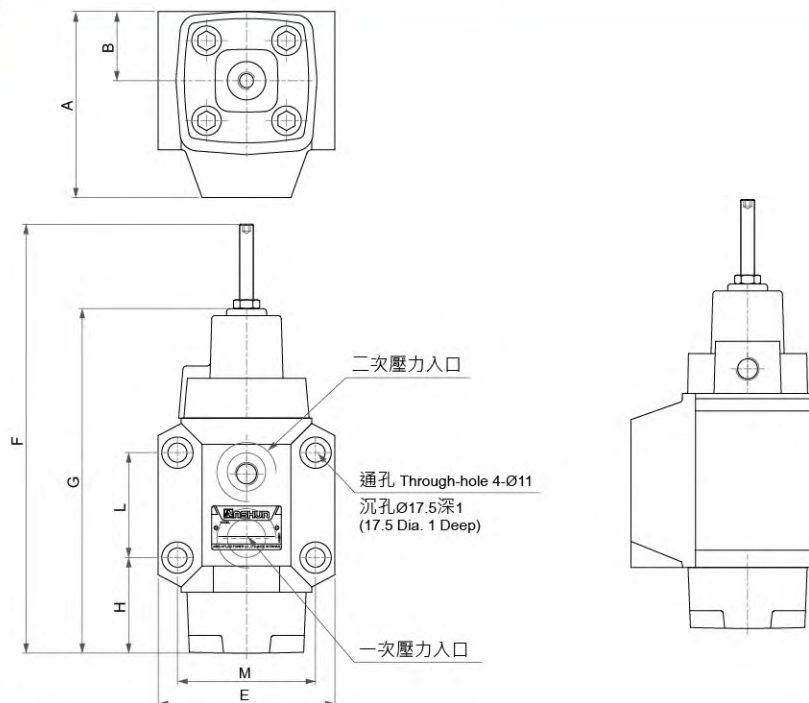

■ 尺寸說明 SPECIFICATIONS


型式 Model Series	A	B	E	F	G	H	L	M
SCV-03G	87	59	89	191	169	49	42.8	66.7
SCV-06G	108	69	102	221	188	51	60.3	79.4

● SCV-10G

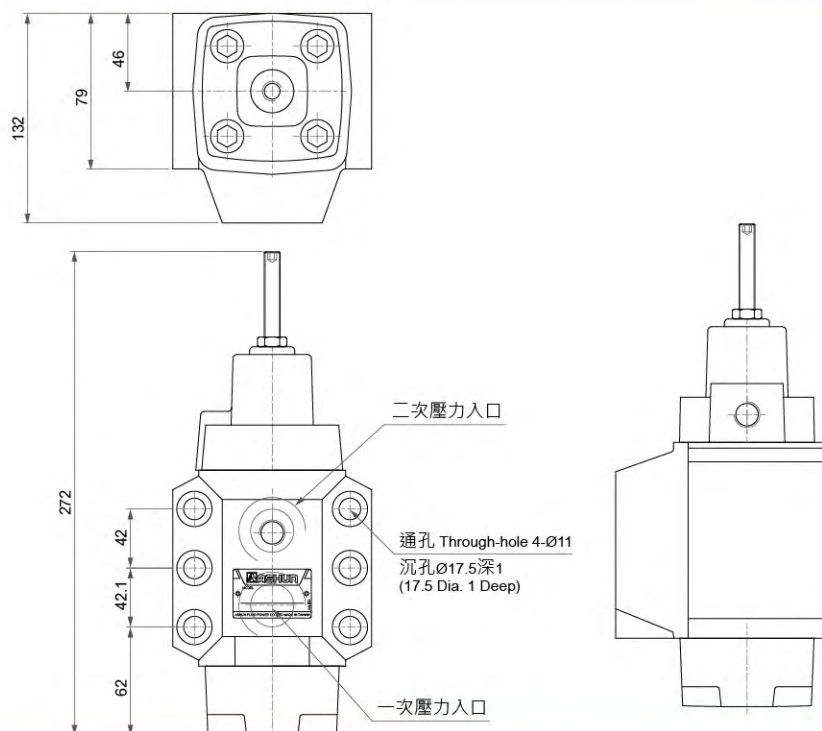

壓力控制閥 Pressure Control Valves


● SCV-(03/06/10)T

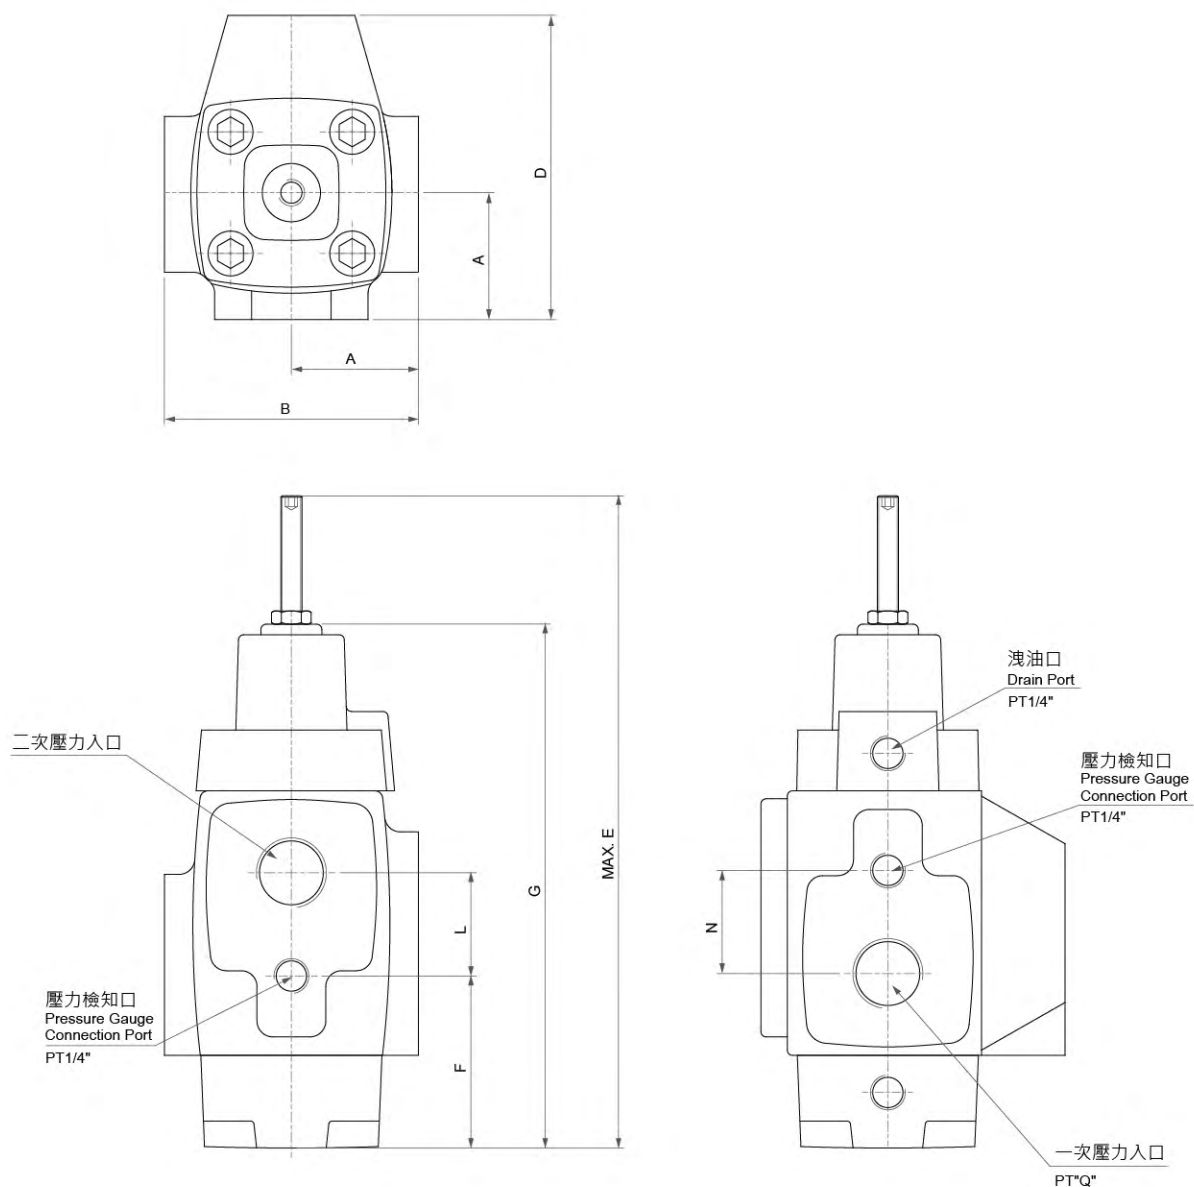

■ 尺寸說明 SPECIFICATIONS

型式 Model Series	A	B	D	E	F	G	L	N	Q
SCV-03T	41	82	96	191	57	106	28	28	3/8
SCV-06T	49	98	119	221	64.5	123.5	33	42	3/4
SCV-10T	66	137	162	272	84	149	40	52	1 1/4

節流閥 Restrictors



■ 選購指南 HOW TO ORDER

TV		03		G		10	
系列編號 SERIES NUMBER		閥口徑 VALVE SIZE		安裝型式 TYPE OF CONNECTION		設計號 DESIGN NUMBER	
TV	- 03 : 3/8"		G : 座墊式 Sub-plated Type				- 10 (標準型) Standard Type
	- 04 : 1/2"		T : 配管式 Thread Type				
	- 06 : 3/4"		G : 座墊式 Sub-plated Type				
	- 10 : 1-1/4"		T : 配管式 Thread Type				

■ 規格說明 SPECIFICATIONS



型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)	
TV-03G	21 (210)	30	1.4	
TV-04T		30	1.2	
TV-06(G/T)		80	2.5	2.9
TV-10(G/T)		200	5	5.8

■ 安裝螺絲 MOUNTING BOLTS

型式 Model Series	安裝螺絲 Mounting Cap Screw
TV-03G	M 8 X 35 L 4pcs
TV-06G	M 10 X 45 L 4pcs
TV-10G	M 12 X 60 L 6pcs

節流閥 Restrictors



● TV-(03/06/10)G

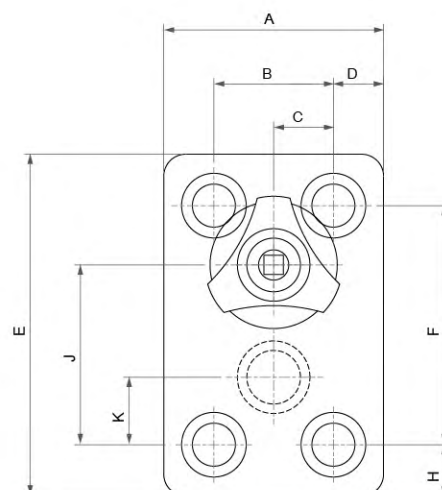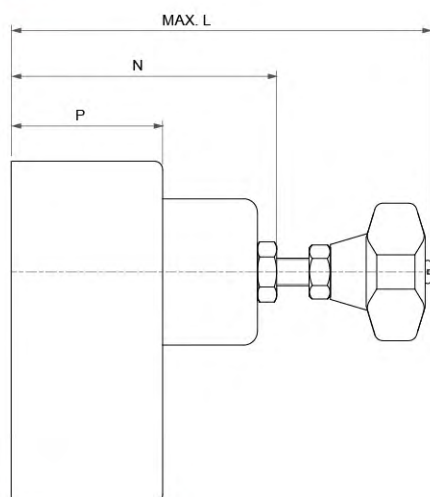

■ 尺寸說明 DIMENSION

型式 Model Series	A	B	C	D	E	F	H	J	K	L	N	P
TV-03G	60	40	20	10	80	60	11	45	11	129	65	30
TV-06G	80	58	29	11	92	70	11	54	11	117.5	73	42
TV-10G	100	72	36	14	120	92	14	71	14	145	93	55


● TV-(04/06/10)T

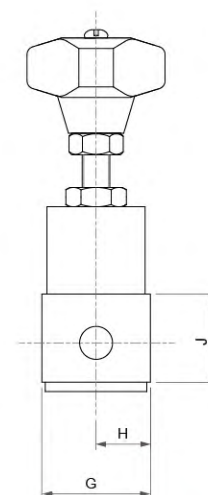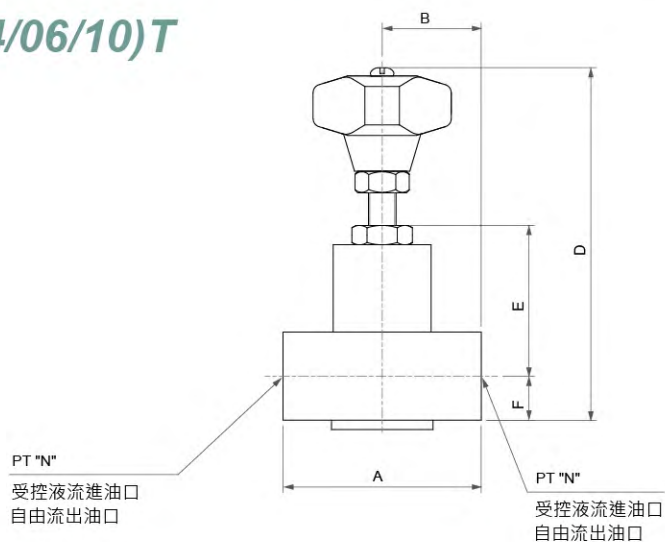

■ 尺寸說明 DIMENSION

型式 Model Series	A	B	D	E	F	G	H	J	N
TV-04T	70	35	116	54	22	42	20	42	1/2
TV-06T	100	50	136.5	62	30	62	30	60	3/4
TV-10T	132	66	173	73	40	82	40	80	11/4

單向節流閥 One Way Restrictors



■ 選購指南 HOW TO ORDER

TCV		03		G		10	
系列編號 SERIES NUMBER		閥口徑 VALVE SIZE		安裝型式 TYPE OF CONNECTION		設計號 DESIGN NUMBER	
TCV	- 03 : 3/8"		G : 座墊式 Sub-plated Type				- 10 (標準型) Standard Type
	- 04 : 1/2"		T : 配管式 Thread Type				
	- 06 : 3/4"		G : 座墊式 Sub-plated Type				
	- 10 : 1-1/4"		T : 配管式 Thread Type				

■ 規格說明 SPECIFICATIONS



型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)	
TCV-03G	21 (210)	30	1.8	
TCV-04T		30	1.5	
TCV-06(G/T)		80	4.3	3.7
TCV-10(G/T)		200	8.1	7.1

■ 安裝螺絲 MOUNTING BOLTS

型式 Model Series	安裝螺絲 Mounting Cap Screw
TCV-03G	M 8 X 60 L 4pcs
TCV-06G	M 10 X 75 L 4pcs
TCV-10G	M 12 X 100 L 6pcs

單向節流閥 One Way Restrictors



● TCV-(03/06/10)G

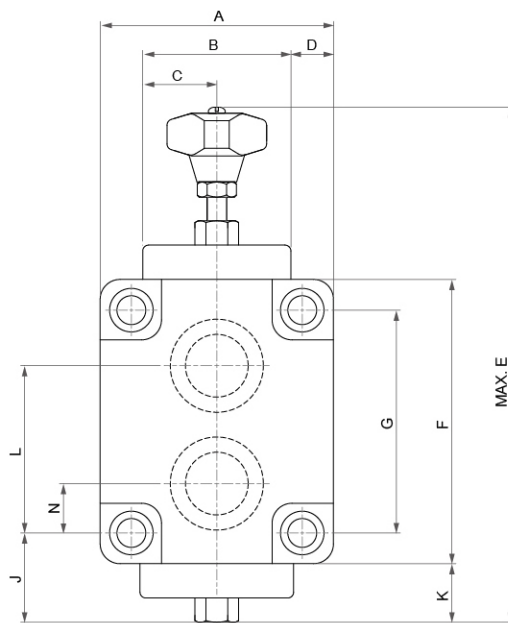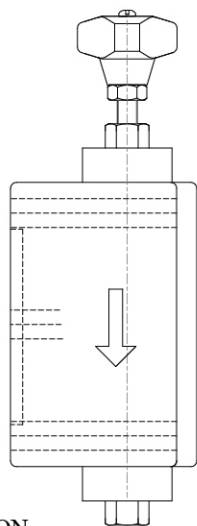

■ 尺寸說明 DIMENSION

型式 Model Series	A	B	C	D	E	F	G	J	K	L	N
TCV-03G	60	40	20	10	151	80	60	28	10	45	15
TCV-06G	80	58	29	11	186	92	70	30	11	54	16
TCV-10G	100	72	36	14	228	120	92	31	14	71	21



● TCV-(04/06/10)T

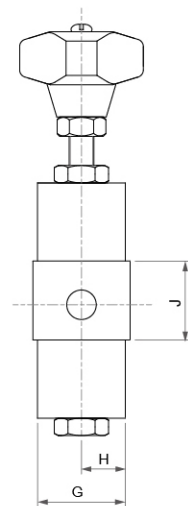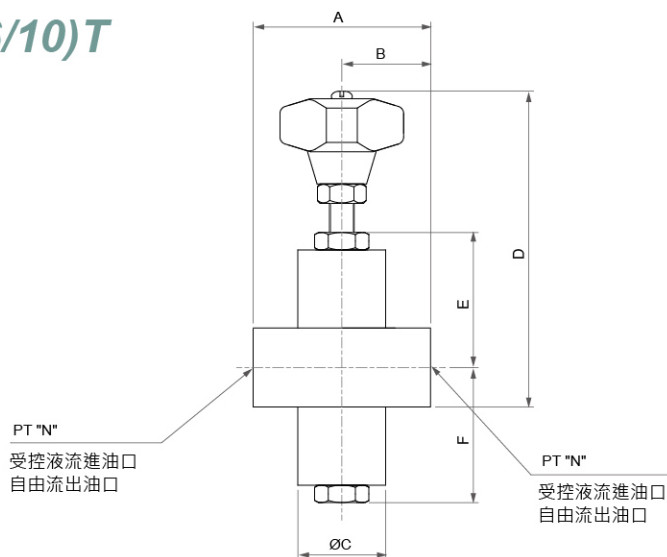

■ 尺寸說明 DIMENSION

型式 Model Series	A	B	C	D	E	F	G	H	J	N
TCV-04T	70	35	40	151	62.5	58	42	20	42	1/2
TCV-06T	103	51.5	56	186	83	65	61	30.5	60	3/4
TCV-10T	132	66	72	228	106	77	81	40.5	82	1 1/4

液控節流閥 Pilot Operated Restrictors



選購指南 HOW TO ORDER

SD	- 06	G	- E	- T	- 10
系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	安裝型式 TYPE OF CONNECTION	導壓方式 PILOT TYPE	洩油方式 DRAIN TYPE	設計號 DESIGN NUMBER
SD	- 06 : 3/4"	G : 座墊式 Sub-plated Type	- E : 外部引導 External Pilot - V : 壓力補償 Pressure Compensating - NONE : 標準型 Standard Type	- T : 外部洩油 External Drain - NONE : 標準型 Standard Type	- 10 (標準型) Standard Type
	- 10 : 1-1/4"				

規格說明 SPECIFICATIONS


型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
SD-06G	21 (210)	120	5
SD-10G		240	8.3

安裝螺絲 MOUNTING BOLTS

型式 Model Series	安裝螺絲 Mounting Cap Screw
SD-06G	M 10 X 45 L 4pcs
SD-10G	M 12 X 55 L 4pcs

液控節流閥 Pilot Operated Restrictors



● SD-(06/10)G

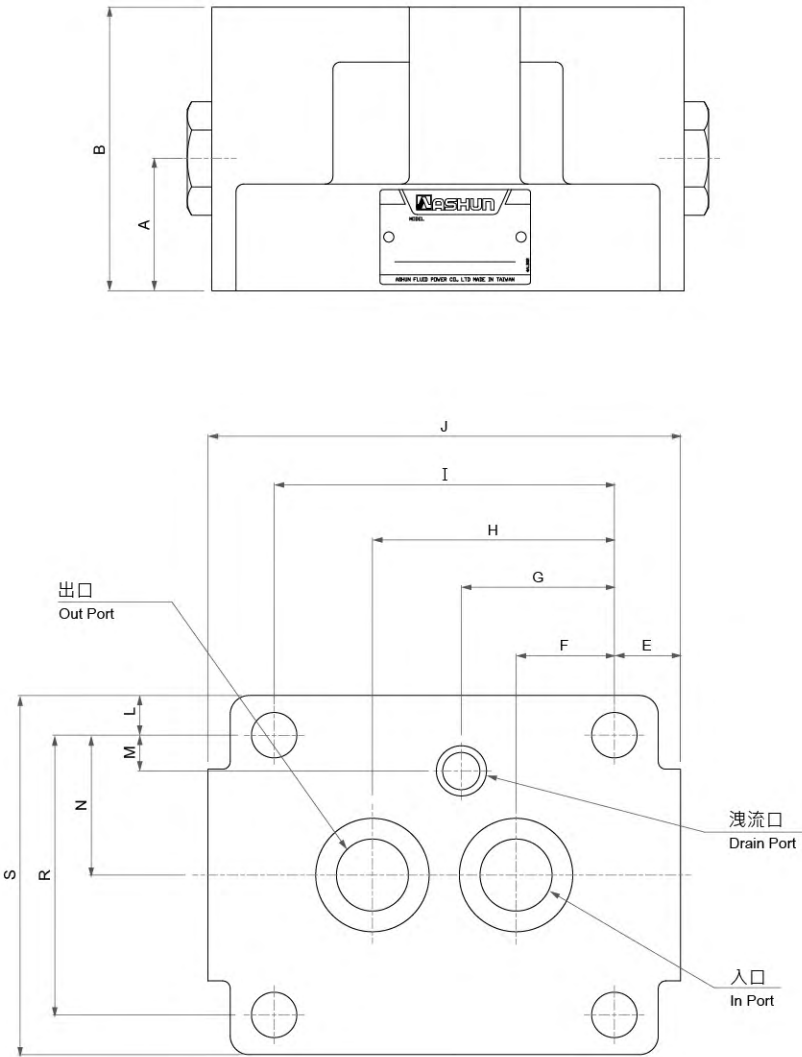

■ 尺寸說明 DIMENSION

型式 Model Series	A	B	E	F	G	H	I	J	L	M	N	R	S
SD-06G	35	75	17.5	26	40.5	64	90	125	10.5	9.5	37	74	95
SD-10G	40	86	19	34	47	78	112	150	14.5	16	43	86	115

液控節流閥 Pilot Operated Restrictors

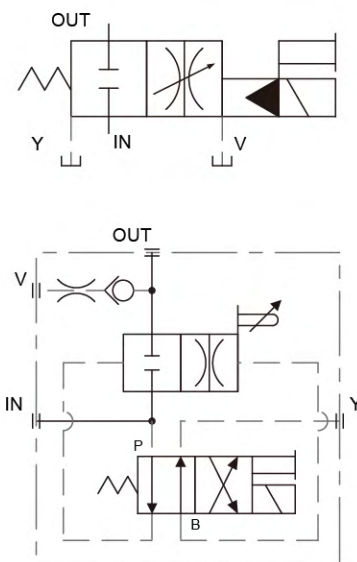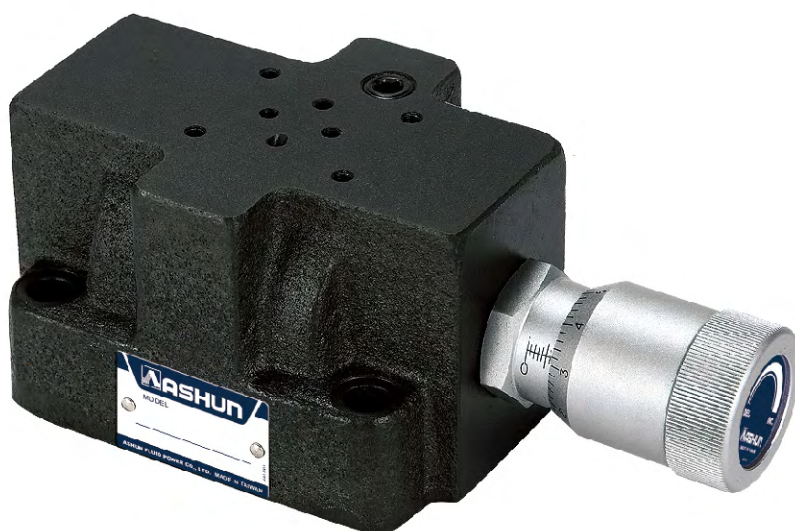

選購指南 HOW TO ORDER

SDF	- 06	G	- E	- T	- 10
系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	安裝型式 TYPE OF CONNECTION	導壓方式 PILOT TYPE	洩油方式 DRAIN TYPE	設計號 DESIGN NUMBER
SDF	- 06 : 3/4"	G : 座墊式 Sub-plated Type	- E : 外部引導 External Pilot	- T : 外部洩油 External Drain	- 10 (標準型) Standard Type
	- 10 : 1-1/4"		- V : 壓力補償 Pressure Compensating	- NONE : 標準型 Standard Type	

規格說明 SPECIFICATIONS


型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
SDF-06G	21 (210)	120	5.7
SDF-10G		240	8.7

安裝螺絲 MOUNTING BOLTS

型式 Model Series	安裝螺絲 Mounting Cap Screw
SDF-06G	M 10 X 45 L 4pcs
SDF-10G	M 12 X 55 L 4pcs

液控節流閥 Pilot Operated Restrictors



● SDF-06/10G

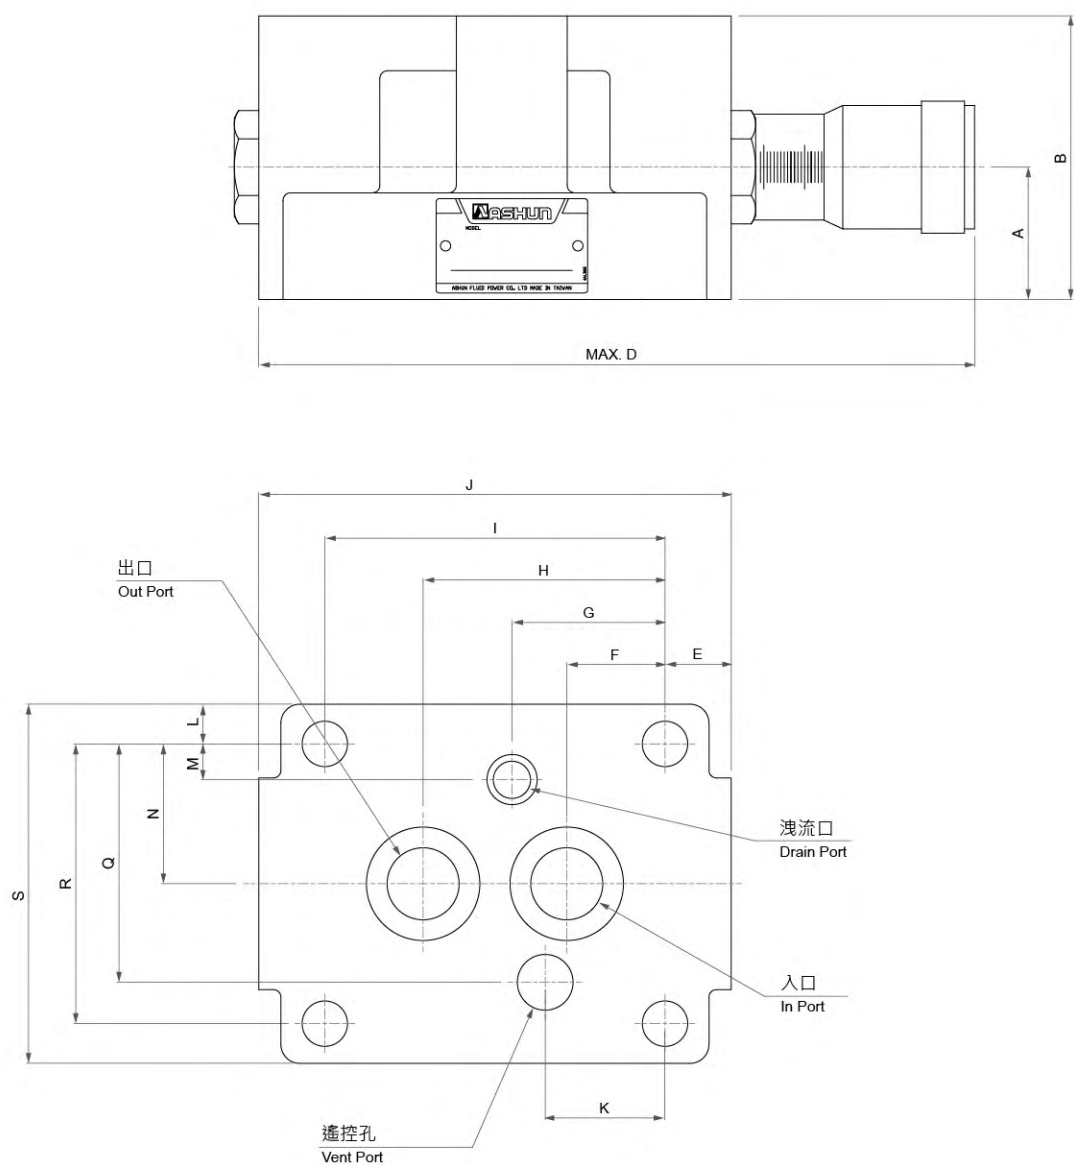

■ 尺寸說明 DIMENSION

型式 Model Series	A	B	D	E	F	G	H	I	J	K	L	M	N	Q	R	S
SD-06G	35	75	209	17.5	26	40.5	64	90	125	31.7	10.5	9.5	37	63	74	95
SD-10G	40	86	248	19	34	47	78	112	150	37.9	14.5	16	43	76	86	115

液控節流閥 Pilot Operated Restrictors

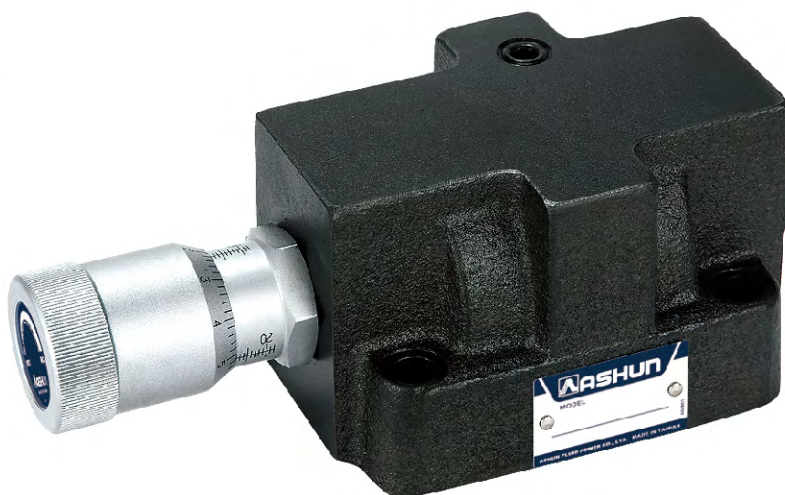

選購指南 HOW TO ORDER

THF	- 06	G	- V	- 10
系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	安裝型式 TYPE OF CONNECTION	導壓方式 PILOT TYPE	設計號 DESIGN NUMBER
THF	- 06 : 3/4" - 10 : 1-1/4"	G : 座墊式 Sub-plated Type	- V : 壓力補償 Pressure Compensating - NONE : 標準型 Standard Type	- 10 (標準型) Standard Type

規格說明 SPECIFICATIONS


型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
THF-06G	25 (250)	120	5.5
THF-10G		240	8.7

安裝螺絲 MOUNTING BOLTS

型式 Model Series	安裝螺絲 Mounting Cap Screw
THF-06G	M 10 X 45 L 4pcs
THF-10G	M 12 X 55 L 4pcs

液控節流閥 Pilot Operated Restrictors



● THF-(06/10)G

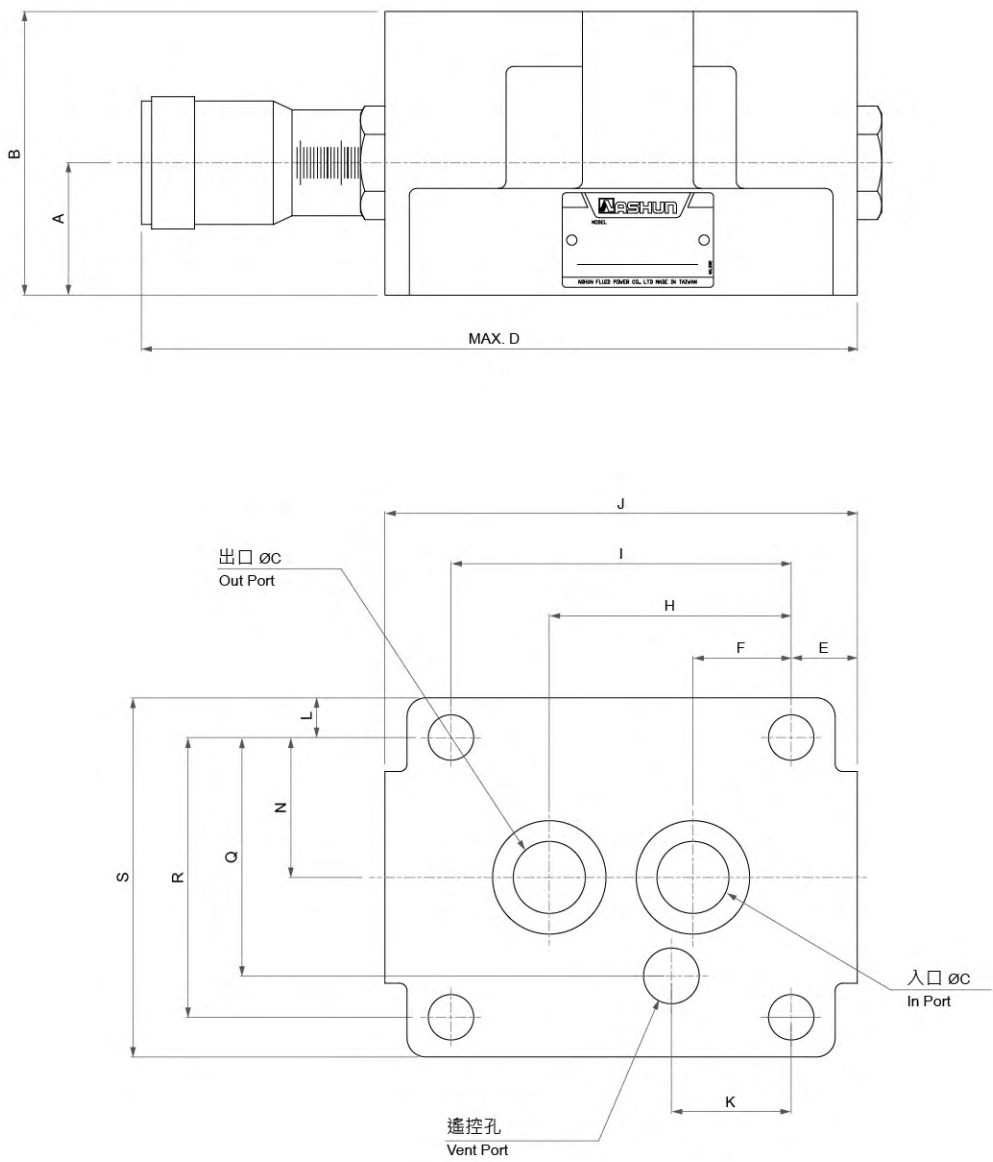

■ 尺寸說明 DIMENSION

型式 Model Series	A	B	C	D	E	F	H	I	J	K	L	N	Q	R	S
THF-06G	35	75	Ø26	209	17.5	26	64	90	125	31.7	10.5	37	63	74	95
THF-10G	40	86	Ø29	248	19	34	78	112	150	37.9	14.5	43	76	86	115

液控節流閥 Pilot Operated Restrictors

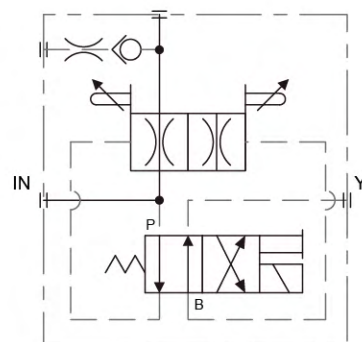

■ 選購指南 HOW TO ORDER

SFD	- 06	G	- E	- T	- 10
系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	安裝型式 TYPE OF CONNECTION	導壓方式 PILOT TYPE	洩油方式 DRAIN TYPE	設計號 DESIGN NUMBER
SFD	- 06 : 3/4"	G : 座墊式 Sub-plated Type	- E : 外部引導 External Pilot	- T : 外部洩油 External Drain	- 10 (標準型) Standard Type
	- 10 : 1-1/4"		- V : 壓力補償 Pressure Compensating	- NONE : 標準型 Standard Type	

■ 規格說明 SPECIFICATIONS


型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
SFD-06G	25 (250)	120	6.2
SFD-10G		240	9.4

■ 安裝螺絲 MOUNTING BOLTS

型式 Model Series	安裝螺絲 Mounting Cap Screw
SFD-06G	M 10 X 45 L 4pcs
SFD-10G	M 12 X 55 L 4pcs

液控節流閥 Pilot Operated Restrictors



● SFD-(06/10)G

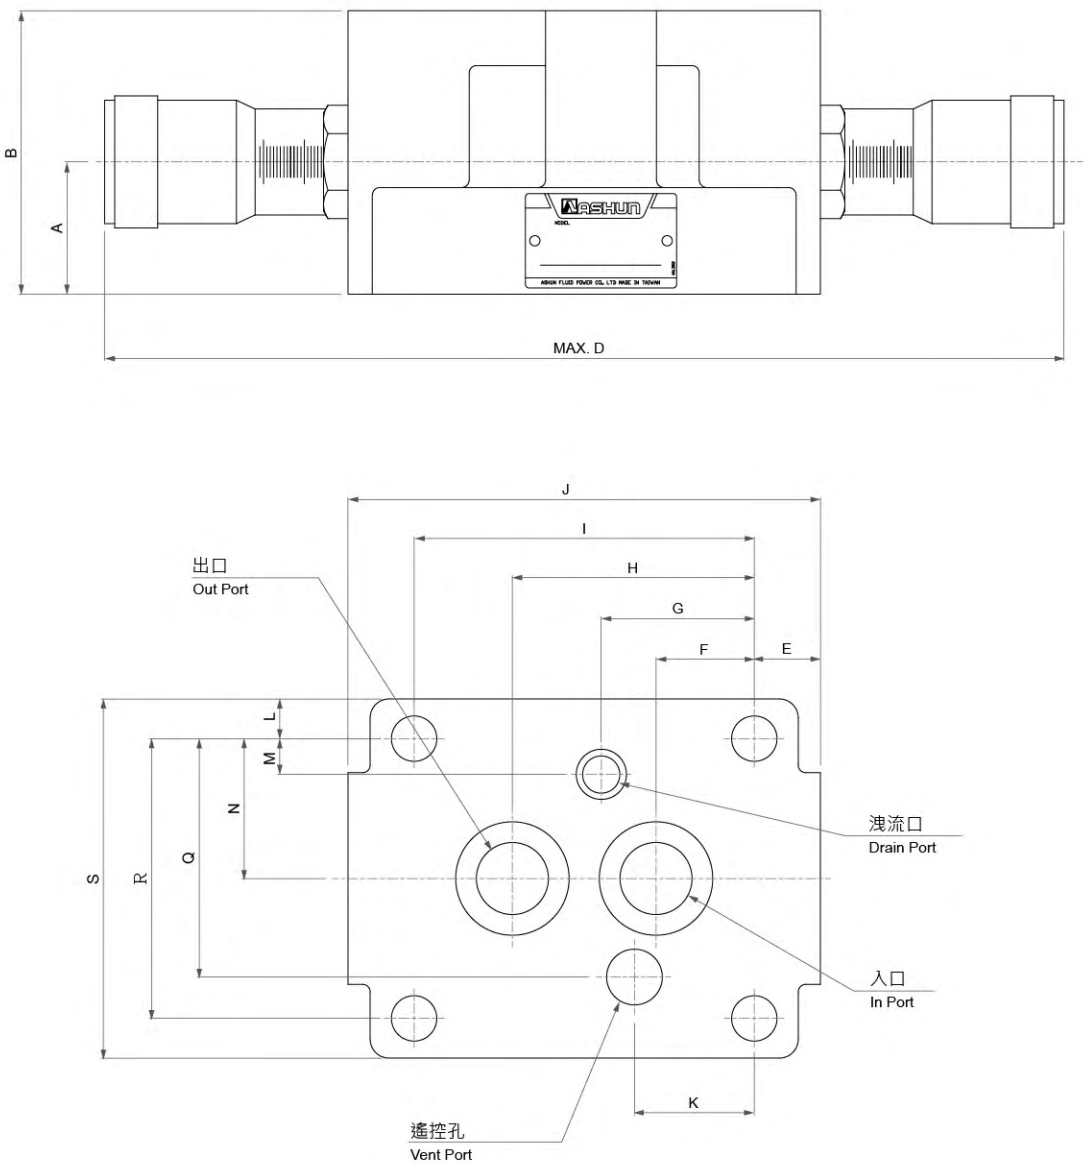

■ 尺寸說明 DIMENSION

型式 Model Series	A	B	D	E	F	G	H	I	J	K	L	M	N	Q	R	S
SFD-06G	35	75	209	17.5	26	40.5	64	90	125	31.7	10.5	9.5	37	63	74	95
SFD-10G	40	86	248	19	34	47	78	112	150	37.9	14.5	16	43	76	86	115

液控節流閥 Pilot Operated Restrictors

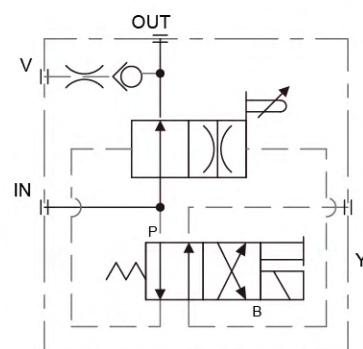

選購指南 HOW TO ORDER

SF	06	G	E	T	10
系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	安裝型式 TYPE OF CONNECTION	導壓方式 PILOT TYPE	洩油方式 DRAIN TYPE	設計號 DESIGN NUMBER
SF	- 06 : 3/4"	G : 座墊式 Sub-plated Type	- E : 外部引導 External Pilot - V : 壓力補償 Pressure Compensating - NONE : 標準型 Standard Type	- T : 外部洩油 External Drain - NONE : 標準型 Standard Type	- 10 (標準型) Standard Type
	- 10 : 1-1/4"				

規格說明 SPECIFICATIONS


型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
SF-06G	25 (250)	120	5.7
SF-10G		240	8.7

安裝螺絲 MOUNTING BOLTS

型式 Model Series	安裝螺絲 Mounting Cap Screw
SF-06G	M 10 X 45 L 4pcs
SF-10G	M 12 X 55 L 4pcs

液控節流閥 Pilot Operated Restrictors



● SF-(06/10)G

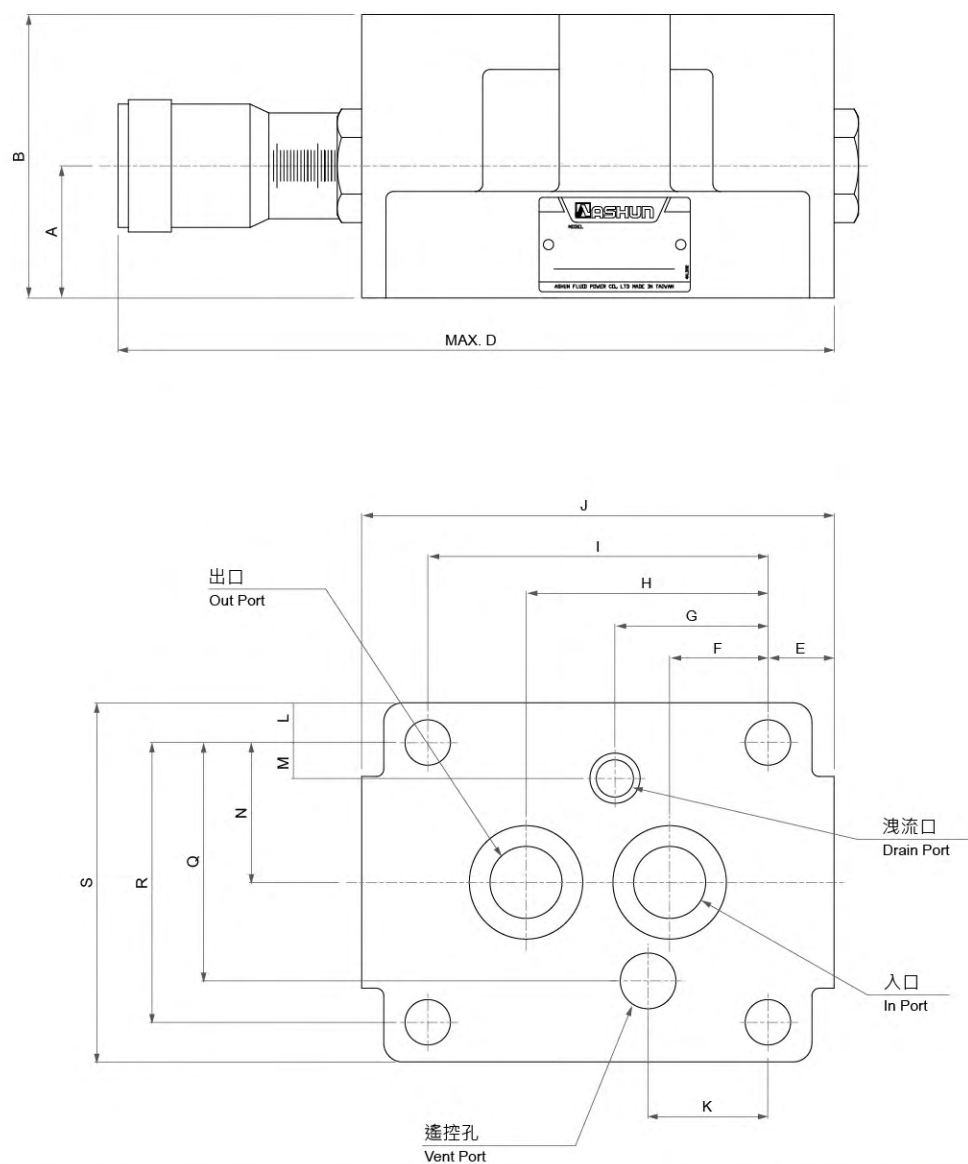

■ 尺寸說明 DIMENSION

型式 Model Series	A	B	D	E	F	G	H	I	J	K	L	M	N	Q	R	S
SFD-06G	35	75	209	17.5	26	40.5	64	90	125	31.7	10.5	9.5	37	63	74	95
SFD-10G	40	86	248	19	34	47	78	112	150	37.9	14.5	16	43	76	86	115

液控節流閥 Pilot Operated Restrictors

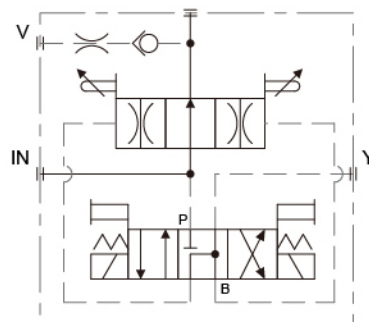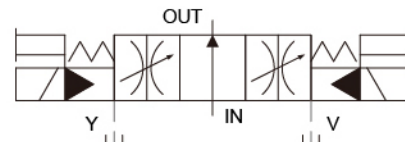

選購指南 HOW TO ORDER

SKF	- 06	G	- E	- T	- 10
系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	安裝型式 TYPE OF CONNECTION	導壓方式 PILOT TYPE	洩油方式 DRAIN TYPE	設計號 DESIGN NUMBER
SKF	- 06 : 3/4"	G : 座墊式 Sub-plated Type	E : 外部引導 External Pilot V : 壓力補償 Pressure Compensating NONE : 標準型 Standard Type	T : 外部洩油 External Drain NONE : 標準型 Standard Type	- 10 (標準型) Standard Type

規格說明 SPECIFICATIONS


型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
SKF-06G	25 (250)	120	7.2

安裝螺絲 MOUNTING BOLTS

型式 Model Series	安裝螺絲 Mounting Cap Screw
SKF-06G	M 10 X 45 L 4pcs

液控節流閥 Pilot Operated Restrictors

● SKF-06G

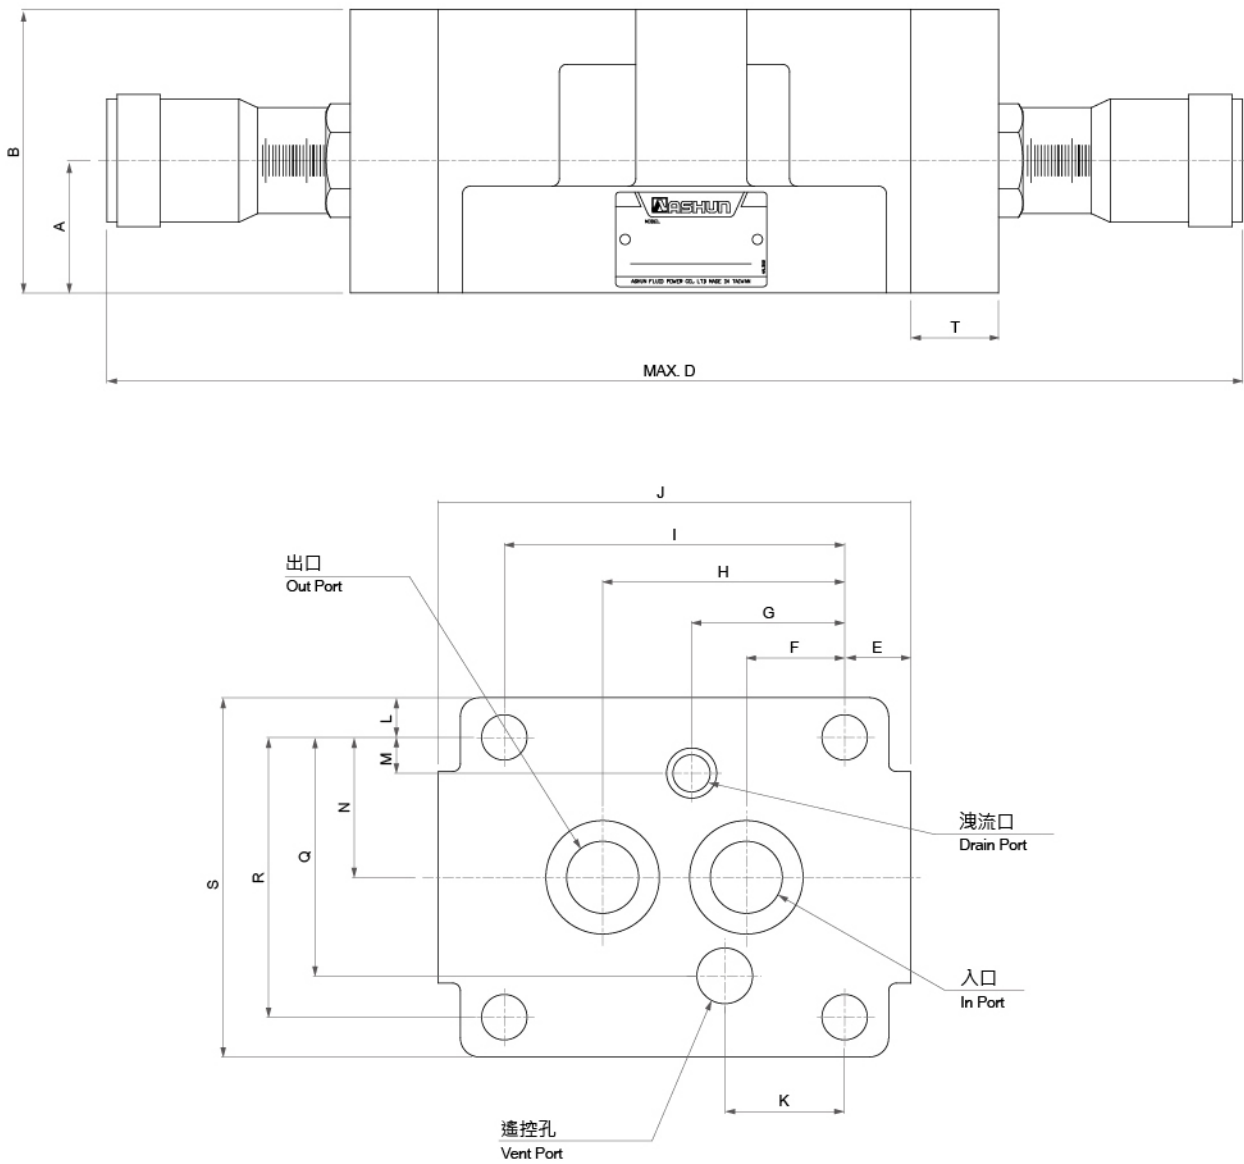

■ 尺寸說明 DIMENSION

型式 Model Series	A	B	D	E	F	G	H	I	J	K	L	M	N	Q	R	S	T
SKF-06G	35	75	315	17.5	26	40.5	64	90	125	31.7	10.5	9.5	37	63	74	95	27

產品索引 | Products Index

01系列疊加閥 | Modular Valves

- 疊加式溢流閥 Relief Modular Valves
- 03 — **MBP** : For P - Line / **MBA** : For A - Line / **MBB** : For B - Line
- 疊加式減壓閥 Pressure Reducing Modular Valves
- 05 — **MRP** : For P - Line / **MRA** : For A - Line / **MRB** : For B - Line
- 疊加式順序閥 Sequence Modular Valves
- 07 — **MHP** : For P - Line
- 疊加式抗衡閥 Counterbalance Modular Valves
- 08 — **MHA** : For A - Line / **MHB** : For B - Line
- 疊加式節流閥 Throttle Modular Valves
- 10 — **MSP** : For P - Line
- 疊加式節流單向閥 Check and Throttle Modular Valves
- 12 — **MSCP** : For P - Line
- 疊加式單向節流閥 Throttle and Check Modular Valves
- 14 — **MSA** : For A - Line / **MSB** : For B - Line / **MSW** : For AB - Line / **MSW** : For AB - Line
- 疊加式單向閥 Check Modular Valves
- 17 — **MCP** : For P - Line / **MCA** : For A - Line / **MCB** : For B - Line / **MCT** : For T - Line
- MCW** : For AB - Line
- 疊加式先導單向閥 Pilot Operated Check Modular Valves
- 19 — **MPA** : For P - Line / **MPB** : For B - Line / **MPW** : For AB - Line
- MPDA** : For P - Line / **MPDB** : For B - Line / **MPDW** : For AB - Line

疊加閥 | Modular Valves

- 疊加式溢流閥 Relief Modular Valves
- 21 — **MRV**
- 疊加式減壓閥 Reducing Modular Valves
- 24 — **MBRV**
- 疊加式順序閥 Sequence Modular Valves
- 27 — **MSV**
- 疊加式平衡閥 Counterbalance Modular Valves
- 29 — **MSCV**
- 疊加式單向閥 Check Modular Valves
- 32 — **MCV**
- 疊加式液控單向閥 Pilot Operated Check Modular Valves
- 34 — **MPCV**
- 釋壓型疊加式液控單向閥 Decompressing Pilot Operated Check Modular Valves
- 36 — **MPCDV**
- 疊加式節流閥 Throttle Modular Valves
- 38 — **MTV**
- 疊加式單向節流閥 Throttle and Check Modular Valves
- 40 — **MTCV**

產品索引 | Products Index

方向控制閥 Directional Control Valves

- 電磁換向閥 Solenoid Operated Directional Valves
42 — AHD
- 單向閥 Check Valves
49 — CV
- 預充閥(滿油閥) Prefill Valves (Surge Valves)
51 — SG
- 液控單向閥 Pilot Operated Check Valves
53 — CPTS
- 釋壓型液控單向閥 Decompressing Pilot Operated Check Valves
54 — PCDV
- 液控單向閥 Pilot Operated Check Valves
57 — PCV
- 手動換向閥 Manually Operated Directional Valves
59 — DMG
61 — DMT
- 轉閥型換向閥 Rotary Type Directional Valves
63 — DRT
- 液控換向閥 Pilot Operated Directional Valves
65 — DS

壓力控制閥 Pressure Control Valves

- 溢流閥 Relief Valves
68 — RV
- 低噪聲型溢流閥 Low Noise Type Pilot Operated Relief Valves
72 — SBG
- 低噪聲型電磁控制溢流閥 Low Noise Type Solenoid Controlled Relief Valves
74 — SBSG
- 電磁控制溢流閥 Solenoid Controlled Relief Valves
76 — SRV
- 減壓閥 Pressure Reducing Valves
81 — BRV
- 單向減壓閥 Pressure Reducing and Check Valves
84 — BRCV
- 壓力控制閥 Pressure Control Valves
87 — SV
90 — SCV

產品索引 | Products Index**流量控制閥 | Flow Control Valves**

節流閥 Restrictors

93 — TV

單向節流閥 One Way Restrictors

95 — TCV

液控節流閥 Pilot Operated Restrictors

97 — SD**99 — SDF****101 — THF****103 — SFD****105 — SF****107 — SKF**

ASHUN

ASHUN FLUID POWER CO., LTD.

No. 18, Jingke S. Rd., Nantun Dist., Taichung City 40852, Taiwan

TEL: +886-4-23505599

FAX: +886-4-23505511

E-mail: info@ashun.com



www.ashun.com